

DECLARATION OF CONFORMITY N° 747911-UK

Declaration of Performance (DoP)

1. Manufacturer:

ISEO Serrature S.p.A. - Via S. Girolamo, 13 – IT 25055 - Pisogne (BS)

2. Product identification code:

Panic exit device Type “B”

3. Type number allowing identification of the construction product as required under Article 11, paragraph 4 (CPR):

Series	Push Palmo and Push Infilare plus locks 214, 212 or DINFIR3	
Models:	Push Palmo + 214, 212 single leaf	9449***** + 214***65* + 032094
	Push Palmo + 214, 212 double leaf	9449***** + 214***65* 9449***** + 212***65*
		active leaf inactive leaf
	Push infilare + 214, 212 single leaf	94F0*****379* + 214***65* + 032094
	Push infilare + 214, 212 double leaf	94F0*****379* + 214***65* 94F0*****379* + 212***65*
		active leaf inactive leaf
	Push Palmo + DINFIR3 single leaf	9490000*03791* + 9459** + 2DB*, 2DC*,2DD*, 2DE*
	Push Palmo + DINFIR3 double leaf	9490000*03791* + 9459** + 2DB*, 2DC*,2DD*, 2DE* 9490000*03791* + 9459** + 2D7
		active leaf inactive leaf
	Push infilare + DINFIR3 single leaf	94F0*****379* + 2DB*, 2DC*,2DD*, 2DE*
	Push infilare + DINFIR3 double leaf	94F0*****379* + 2DB*, 2DC*,2DD*, 2DE* 94F0*****379* + 2D7
		active leaf inactive leaf
Accessories:	Push Palmo and Push infilare plus 214, 212 locks	0321**, 0327**, 032144*, 032714*, 032724*, 032744*, 032154*, 032164*, 032174*, 032704*, 032184*, 0321A4*, ARIES 00E1***10**, 032532*, 03243**, 03241**, 032515*, 03246**, 03242*, 3240**, 03250**, 03245**, 04244**
	Push Palmo and Push infilare plus DINFIR3 locks	03865*, 94100160, 032144*,032714*, 032724*, 032744*, 032154*, DINFIR3 032174*, 032704*, 032164*, 032314*, 032184*, 0321A4*, ARIES 00E1***10**, 032532*, 03243**, 03241**, 032515*, 03246**, 03242**, 03240**, 03250**,03245**

4. Intended use of the construction product:

For doors on escape routes

5. System of assessment and verification of constancy of performance:

2019 no 465 - The Construction Products

6. Approved Body:

BSI
Number
0086

7. Certificate of constancy of performance:

0086-CPR-747911

8. Harmonized standard:


EN1125:2008
Classification:
|3|7|7|B|1|4|2|2|B|A|

9. Essential characteristics

EN1125 § 4.1.2	Release function	< 1 [sec]
EN1125 § 4.1.3	Panic exit device mounting	Assembling on the inside face of the door
EN1125 § 4.1.5	Exposed edge and corners	r ≥ 0,5 [mm]
EN1125 § 4.1.7	Double doorset	When used on double doorset leaves allows both leaves to be opened simultaneously.
EN1125 § 4.1.9	Bar installation	Z ≤ 150 [mm]
EN1125 § 4.1.10	Bar length	X ≥ 60% Y
EN1125 § 4.1.11	Bar projection	W ≤ 100 [mm]


DECLARATION OF CONFORMITY N° 747911-UK

EN1125 § 4.1.12	Bar end	The operating bar does not protrude beyond either of the end support brackets.
EN1125 § 4.1.13	Operating bar face	$V \geq 18$ [mm], $V \geq 60\%$ U
EN1125 § 4.1.14	Test rod	The device does not trap the test rod in any position of the push pad.
EN1125 § 4.1.15	Door face gap	$S \geq 25$ [mm], $T \geq 3$ [mm] with pushed bar
EN1125 § 4.1.16	Accessible gap	The test piece placed in any accessible gap cannot prevent the correct operation of the device.
EN1125 § 4.1.17	Door free movement	The device does not include any element impeding the free movement of the door once it is released.
EN1125 § 4.1.18	Top vertical bolt	The releasing of the bottom vertical rod bolt head does not release the top vertical rod bolt head.
EN1125 § 4.1.20	Keepers	The keeper protects the door frame from the damage caused by the door closing and opening.
EN1125 § 4.1.21	Keepers dimensions	$H \leq 15$ [mm], $M \leq 45$ [°], $P \leq 3$ [mm].
EN1125 § 4.1.23	Door mass and dimensions	$M \leq 250$ [kg], $H \leq 3.400$ [mm], $L \leq 1.320$ [mm]
EN1125 § 4.1.24	Outside access device	The outside access device does not render the emergency device inoperable from the inside.
EN1125 § 4.2.2	Release force	$F \leq 80$ [N] <80N with the door unloaded and ≤ 220 [N] with the door loaded with 1.000N.
EN1125 § 4.2.7	Security requirement	Grade 1: the device remains locked when a force of 1000 [N] is applied to the door.
EN1125 § 4.1.7	Corrosion resistance	Grade 4: very high resistance (240 hours)
EN1125 § 4.1.6	Temperature range	-10 [°C]; +60 [°C]
EN1125 § 4.1.19	Cover for vertical rods	Not applicable
EN1125 § 4.1.22	Lubrication	Every 20 000 cycles without dismounting the device
EN1125 § 4.2.3	Reengaging force	≤ 50 [N]
EN1125 § 4.2.4	Durability	Grade 7: 200 000 test cycles
EN1125 § 4.2.5	Abuse test	It withstand to F1, F2, F3, F4
EN1125 § 4.2.6	Abuse test – vertical rods	Not applicable
EN1125 § 4.2.8	Final examination	The device is released with a force ≤ 80 [N] with the door unloaded and ≤ 220 [N] with the door loaded with 1.000 [N].
EN1125 Annex B	Suitability for use on fire/smoke resistance door assemblies.	Grade B: suitable for use on fire/smoke resisting door assemblies.
EN1125 § 4.1.25	Dangerous substances	The materials in this product do not contain or release any dangerous substances in excess of the maximum levels specified in existing European material standards or any national regulations.

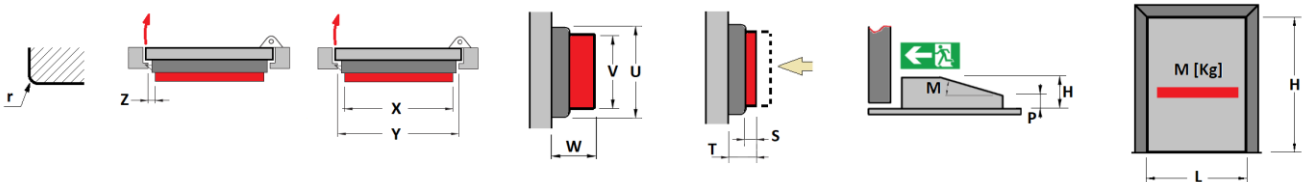

DECLARATION OF CONFORMITY N° 747911-UK

10. Possible configurations

 <p>Push Palmo plus locks 214, 212 Available</p> <p>Push Palmo plus locks DINFIR3 Available</p> <p>Push Infilare plus locks 214, 212 Available</p> <p>Push Infilare plus locks DINFIR3 Available</p>	 <p>Push Palmo plus locks 214, 212 Not available</p> <p>Push Palmo plus locks DINFIR3 Available</p> <p>Push Infilare plus locks 214, 212 Not available</p> <p>Push Infilare plus locks DINFIR3 Available</p>	 <p>Push Palmo plus locks 214, 212 Not available</p> <p>Push Palmo plus locks DINFIR3 Available</p> <p>Push Infilare plus locks 214, 212 Not available</p> <p>Push Infilare plus locks DINFIR3 Available</p>
 <p>Push Palmo plus locks 214, 212 Available</p> <p>Push Palmo plus locks DINFIR3 Available</p> <p>Push Infilare plus locks 214, 212 Available</p> <p>Push Infilare plus locks DINFIR3 Available</p>	 <p>Push Palmo plus locks 214, 212 Not available</p> <p>Push Palmo plus locks DINFIR3 Not available</p> <p>Push Infilare plus locks 214, 212 Not available</p> <p>Push Infilare plus locks DINFIR3 Available</p>	 <p>Push Palmo plus locks 214, 212 Not available</p> <p>Push Palmo plus locks DINFIR3 Not available</p> <p>Push Infilare plus locks 214, 212 Not available</p> <p>Push Infilare plus locks DINFIR3 Not available</p>

The performance of the product identified in points 2 and 3 is in conformity with the declared performance in point 9. The declaration of performance is issued under the sole responsibility of the manufacturer identified in point 1. Signed for and on behalf of the manufacturer by:

Place	First issuing	Current issuing
PISOGNE (BS) ITALY	16/07/2021	07/03/2022

ISEO SERRATURE S.p.A.

Stefano Gelmini

Product Certification Manager

