

Connected Smart

e-CATALOG
2026_2.0

E N G L I S H

ISEO[®]
ULTIMATE ACCESS TECHNOLOGIES



Connected Smart

New

Libra X Smart

The evolution of the ISEO electronic cylinder


Libra X features a renewed, modern, and essential design, while its native modularity ensures maximum installation flexibility and rapid intervention, allowing it to integrate seamlessly into any architectural context.



Door Controller Smart

To protect your access points

Door Controller Smart is ISEO's electronic control unit designed to manage access to any electrical device operated via relay, ensuring the highest level of security.

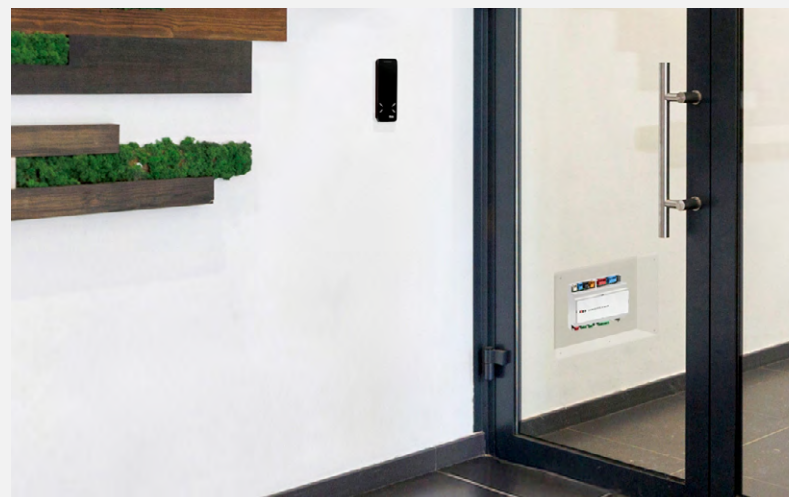



ARGO App



Control smart devices of ISEO with the ARGO App.

Manage access to your spaces intuitively and securely, monitor activities in real time, and simplify permission management. With ARGO, you have total control by your side, wherever you are. Download it now and discover the future of security.

 [ARGO User Manual](#)

 [ARGO System Brochure](#)



download



download



Cybersecurity



ARGO is a reliable solution for access system security.

Cybersecurity in residential access control is crucial to ensure the safety of modern homes. For ISEO, security is very important. ISEO implements proven techniques based on industry best practices and derived from existing encryption and network security technologies. Thanks to direct connectivity to the locks and end-to-end encryption, without an intermediate server (the Cloud is only used as a bridge), ARGO ensures both local and remote connections with the same level of security. Locally, the app connects to the opening device directly via Bluetooth® Low Energy 5.1, ensuring maximum security with encryption techniques based on:

- Crypto AES 128
- Session keys generated with ECDH (Elliptic-curve Diffie–Hellman)
- Random Number Generator according to NIST (National Institute of Standards and Technology) specifications



Sustainability



In ISEO's ARGO access control sustainability is a priority.

By implementing efficient energy solutions and recyclable materials, ARGO reduces its environmental impact. In addition, wireless installation and keyless operation ensure less use of materials that are not easily recyclable, such as metal keys and cables. ARGO represents a sustainable option for access security without compromising the environment.



Libra X Smart electronic modular cylinder with RFID/Bluetooth reader and Standard mechanical knob.




ARGO system architecture

ISEO's cloud-connected wireless access control system is an advanced and versatile solution for managing doors and other types of access points, all facilitated by the absence of cabling thanks to the devices' on-board batteries and low energy technology. Thanks to cloud integration, the system offers secure and reliable connectivity, allowing real-time access to data and configurations. The system's scalability allows it to adapt to evolving needs, efficiently managing both small environments and larger buildings.

Up to 300 users
per device

Unlimited number of devices
and gateways per system

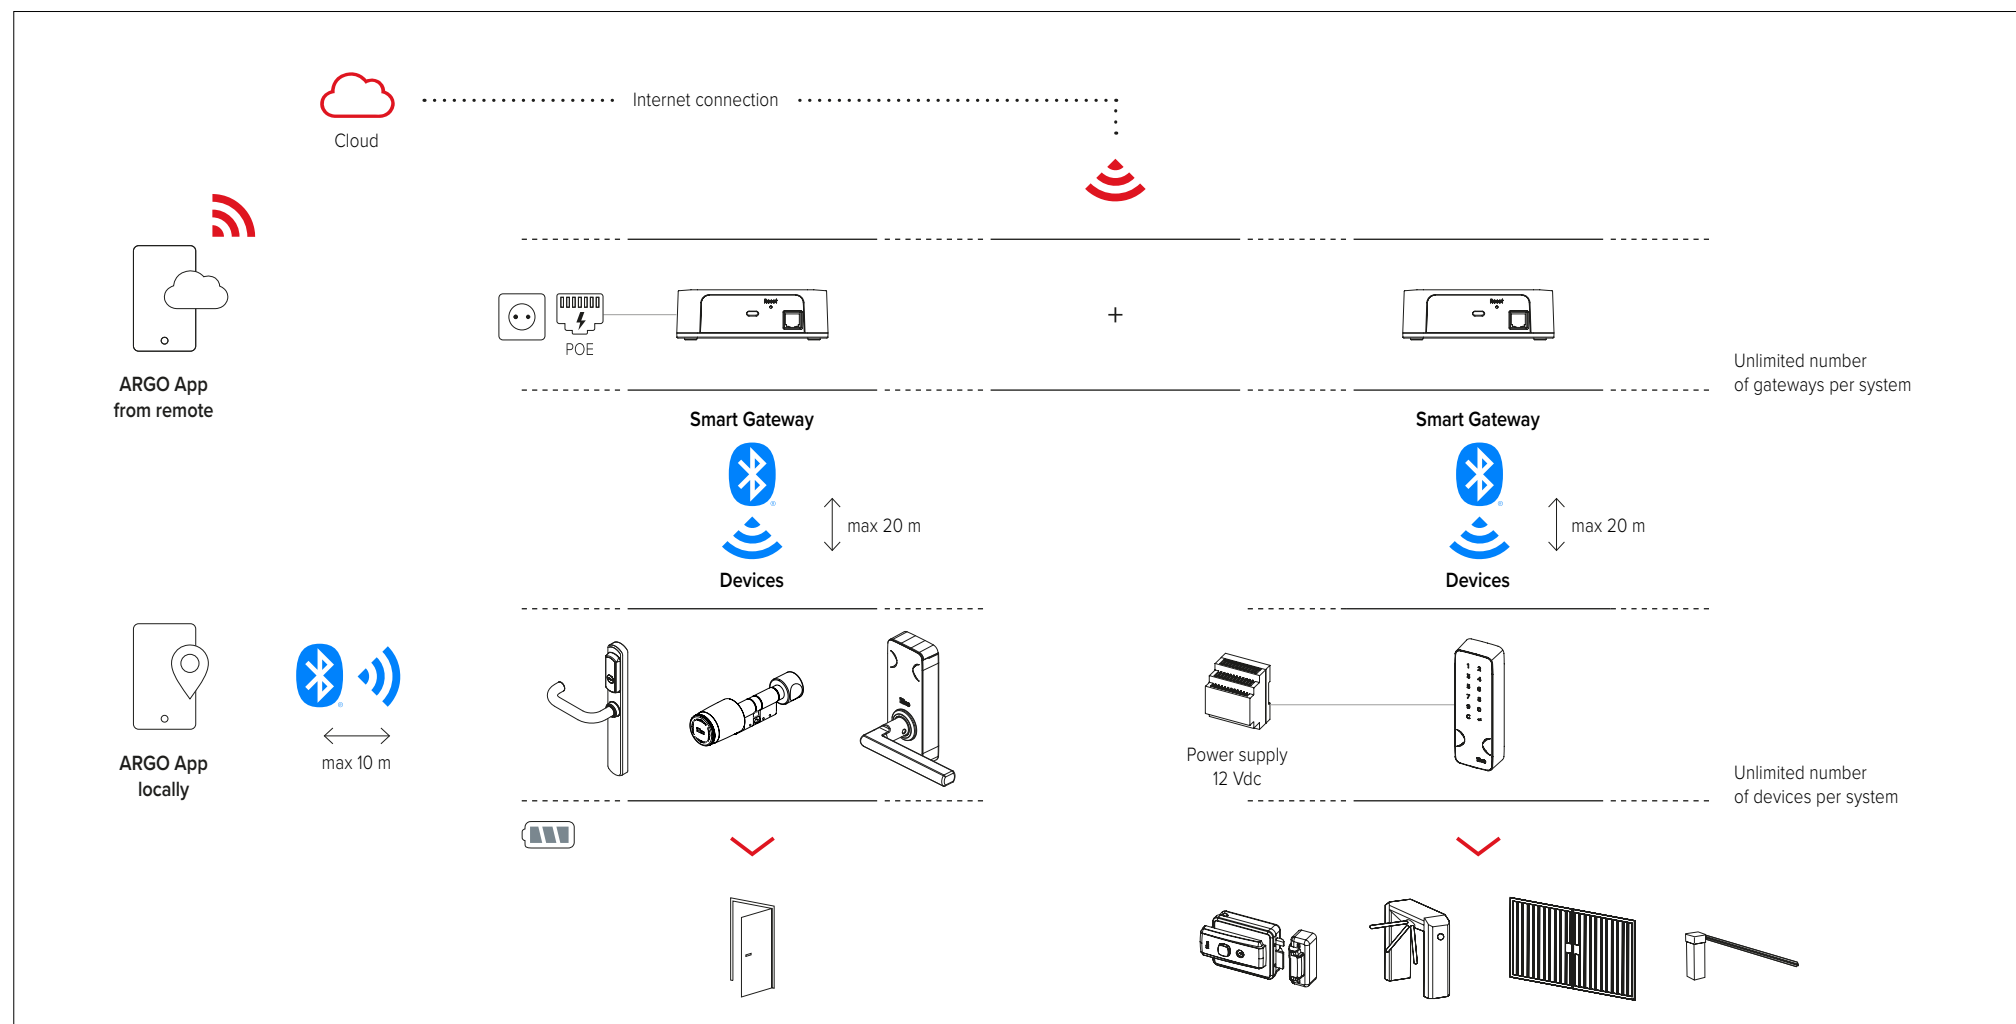

Success Stories

LAKE VILLA

Residential building, Henan, Cina

Residents of Lake Villa flats can open the doors of their homes in various ways: with their smartphone, a physical key or other credentials.

[Read more](#)




HOUSE AT BUKIT DAMANSARA

Villa Kuala Lumpur, Malesia

The private villa in Kuala Lumpur combines architectural elegance with advanced technological solutions.

[Read more](#)

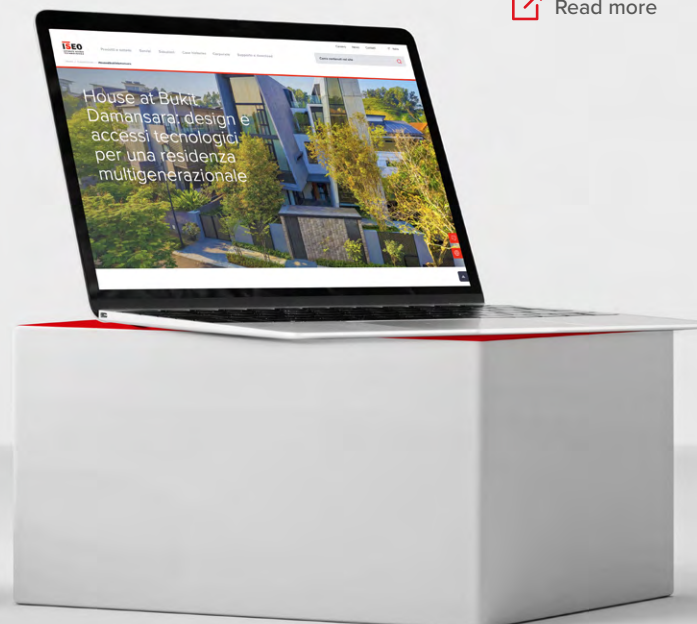

Reading Guide

Home Button
and Previous View

Quick navigation to devices'
main pages

Device name

MA1A Smart Standard

Device type

CONNECTED SMART HANDLE WITH RFID
TECHNOLOGY AND BLUETOOTH®



Technical features

FIRMWARE

ARGO

POWER UNIT

3 alkaline batteries 1.5V type AAA

ESTIMATED BATTERY LIFE

Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and
the options activated.

ALERTS

- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

- Backset min 35 mm (E)
- Escutcheon max diameter = 52mm (C)
- Min center-holes distance = 70mm (D)
- DIN holes = 38mm (DIN)
- Multiblo Easy Exit Lateral compatible version (M)
- Max handle rotation angle 40°
- 7, 8 or 9 mm square spindle (*)
- Recommended locks with latchbolt only or automatic deadbolt
function
- Max door mass and dimensions 250 Kg, 1320 x 2520 mm (W x H)
- Door thickness 40 - 125 mm
- Compatible to all European DIN locks

(*) 8mm square spindle required with MA1A handles provided by ISEO. 7 and 9mm square
spindle compatible to MA1A available (go to Aries screws and handle follower kit)

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- IP54
- H.R. max. 95% without condensing

WORKING TEMPERATURE

-20°C ÷ +60°C

STORAGE TEMPERATURE

-20°C ÷ +70°C

PACKAGE

MA1A smart handle, 3x AAA 1.5Vdc alkaline batteries, torx key T8,
anti-tilt kit.

ACCESSORIES (NOT INCLUDED)

- Handle Set (standard and with Safe Touch antibacterial protection)
- Spindle and screws kit

Technical Data
of the device

Device code

code 00E40201555



If there is the

Code configurator

click to create the code
using the configurator
of the specific device

DIMENSIONS

- Width: 56mm
- Length: 147mm
- Thickness: 24mm
- Handle length: 115 mm from the center of the plate

Weight
600 g

Links to accessories
pages

ONLINE CONTENT

Web page

Data sheet

Leaflet

User manual

Installation guide

Specifications

Custom Handle Specifications

Drilling Template

Links to online
materials on iseo.com

Search by device

MA1A Smart

Go to page

MODELS

→ Standard

p. 13



The smart handle for many applications

MA1A Smart is the new electronic lock of the ISEO Connected products range which allows to manage the access with simplicity in residential, “light commercial” environments, B&B. MA1A with its compact and stylish design is an excellence of Made in Italy and represents the perfect retrofit solution for internal doors.

Make your doors connected

MA1A Smart can be opened through ARGO the smartphone app conceived for iOS and Android device, with which the user can manage, monitor and open all the doors upon which MA1A has been installed - RFID cards, tags, key fob.
The installation of the smart handle is quickly and effortlessly, is easy to use and it is compatible with all DIN mechanical locks.

Product’s functions

- Memorize up to 300 users credentials
- Records the last 1000 events
- Battery-operated device with charge status detection
- Wake up by RFID card detection or phone Bluetooth® (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Light and acoustic signals
- Permanently open mode (office mode) without no extra battery consumption
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

FINISH

 Technopolymer

COLOR

 Glossy black

ENVIRONMENTAL CHARACTERISTICS

- IP54
- Max. 95% without condensing

CREDENTIALS

- Badge
- Keyfob
- Bracelet
- Smartphone
- Apple Watch

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1

CERTIFICATIONS

- CE (Conformitee Europeenne)
- UKCA (UK Conformity Assessed)
- EN 16867:2020 with classification I3I7I0IBI14IB/D*I0I0I
- EN 1634-1 fire resistance EI90

* B with MIFARE Classic cards,
D with MIFARE DESFire cards

MA1A Smart

Selection guide

The MA1A electronic handle is available with different handle sets.

The items required to adapt the different door types and to ensure correct installation are various and must be chosen from the options available according to the characteristics and the dimensions of the door and the specific usage requirements.

To ensure the correctness and completeness of the order below is a guide for the selection of the various articles that make up the set for each door.

ORDER THE PRODUCT IN A FEW STEPS

1

Check the **type of door** on which the MA1A Connected Smart Handle will be mounted.

3

Compose the necessary spindle and screws kit.

2

Choose the **handle set** you prefer.

4

Optional.
Choose **lock to match**.

Go to page

● **SELECTION GUIDE**

MODELS

→ Standard


p. 13

Go to page

Go to page

MA1A Smart Standard

CONNECTED SMART HANDLE WITH RFID TECHNOLOGY AND BLUETOOTH®



Technical features

FIRMWARE

ARGO

POWER UNIT

3 alkaline batteries 1.5V type AAA

ESTIMATED BATTERY LIFE

Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

- Backset min 35 mm (E)
- Escutcheon max diameter = 52 mm (C)
- Min center-holes distance = 70 mm (D)
- DIN holes = 38 mm (DIN)
- Multiblindo Easy Exit Lateral compatible version (M)
- Max handle rotation angle 40°
- 7, 8 or 9 mm square spindle (*)
- Recommended locks with latchbolt only or automatic deadbolt function
- Max door mass and dimensions 250 Kg, 1320 x 2520 mm (W x H)
- Door thickness 40 - 125 mm
- Compatible to all European DIN locks

(*) 8 mm square spindle required with MA1A handles provided by ISEO. 7 and 9 mm square spindle compatible to MA1A available (go to Aries screws and handle follower kit)

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- IP54
- H.R. max. 95% without condensing

WORKING TEMPERATURE

-20°C ÷ +60°C

STORAGE TEMPERATURE

-20°C ÷ +70°C

PACKAGE

MA1A Smart handle, 3x AAA 1,5Vdc alkaline batteries, torx key T8, anti-tilt kit.

ACCESSORIES (NOT INCLUDED)

- Handle Set (standard and with Safe Touch antibacterial protection)
- Spindle and screws kit

code 00E40201555



DIMENSIONS

- Width: 56 mm
- Length: 147 mm
- Thickness: 24 mm
- Handle length: 115 mm from the center of the plate

Weight
600 g

ONLINE CONTENT

-  Web page
-  Data sheet
-  Leaflet


-  User manual
-  Installation guide
-  Specifications

-  Custom Handle Specifications
-  Drilling Template

MA1A Smart

Accessories

HANDLE SET



YUMA

MA1A Handle Set

Package: 1 MA1A external handle, 1 Internal handle, 1 Internal handle fixing plate with reinforcing spring and cover, 2 Internal and external cylinder escutcheons with covers.



Zamak Alloy – Matte Black RAL 9005

1 00.329.005

WITH SAFE TOUCH ANTIBACTERIAL PROTECTION

Safe Touch treatment applied to external and internal handle.

1 00.329.005A


Zamak Alloy – Satin Chrome

1 00.329.00Y

WITH SAFE TOUCH ANTIBACTERIAL PROTECTION

Safe Touch treatment applied to external and internal handles.


1 00.329.00YA



URACAN

MA1A Handle Set

Package: 1 MA1A external handle, 1 Internal handle, 1 Internal handle fixing plate with reinforcing spring and cover, 2 Internal and external cylinder escutcheons with covers.



Stainless steel – Matte Black RAL 9005

1 00.431.005

WITH SAFE TOUCH ANTIBACTERIAL PROTECTION

Safe Touch treatment applied to external and internal handles.

1 00.431.005A


Satin Stainless steel

1 00.431.002

WITH SAFE TOUCH ANTIBACTERIAL PROTECTION



Safe Touch treatment applied to external and internal handles.

1 00.431.002A



MA1A Smart

Accessories



SPINDLE AND SCREWS KIT


Spindle and screws length related to door thickness (A)
Package includes: 1 square spindle, 2 M5 fixing screws with thread-locking.
NOTE: select the right kit depending on door thickness.

8 mm square spindle and 2xM5 screws kit

Door thickness from 40 to 50 mm	1	201E004050A
Door thickness from 50 to 60 mm	1	201E005060A
Door thickness from 60 to 70 mm	1	201E006070A
Door thickness from 70 to 80 mm	1	201E007080A
Door thickness from 80 to max 125 mm (to be cut)	1	201E008010A

7 mm square spindle and 2xM5 screw kit

Door thickness from 40 to 50 mm	1	0000A00278
Door thickness from 50 to 60 mm	1	0000A00279
Door thickness from 60 to 70 mm	1	0000A00280
Door thickness from 70 to 80 mm	1	0000A00281

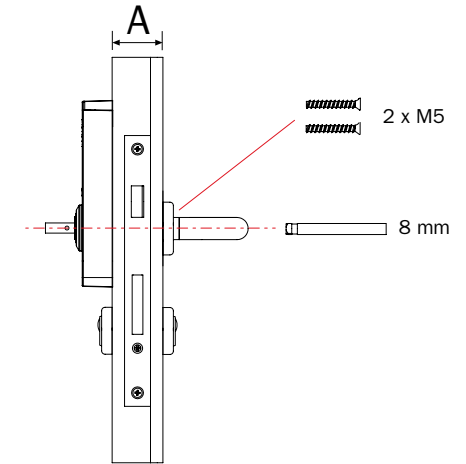

MA1A Smart

Accessories

LOCK CAN BE COMBINED

PANIC FIRE-RATED SELF-LOCKING LOCK

Panic self-locking lock for fire-resistant doors.

When the leaf is approached, the deadbolt of the lock is automatically engaged.

Internal operation:

The key operates the external handle (function B) and retracts the latch and deadbolt (only with function E).

The panic bar and/or emergency handle always retract the latch and deadbolt.

External operation:



The key enables/disables the handle that recalls the latch and deadbolt (function B).

72 mm center distance. 9 mm sintered steel handle follower set with 30° rotation.

Self-locking 20 mm deadbolt.

Zinc plated front plate (stainless steel option) with round edges (square edges option) 24x3 mm (20x3 mm option). NK sintered steel latch.

Compatible with Euro profile cylinder, with DIN cam to be ordered separately.

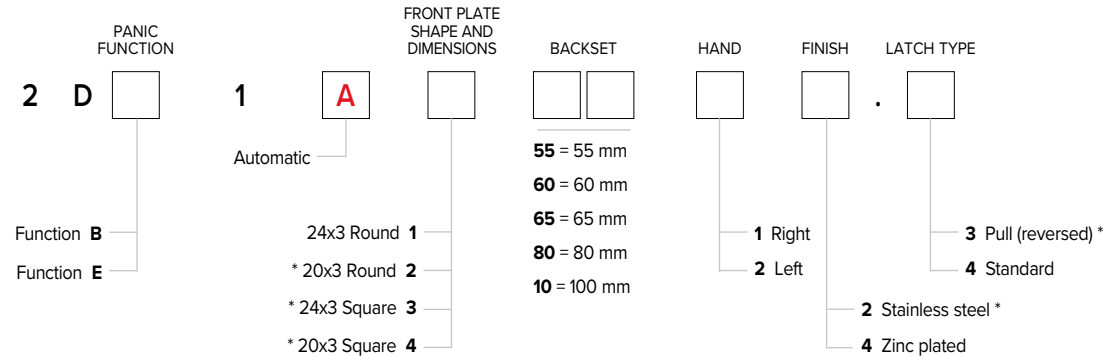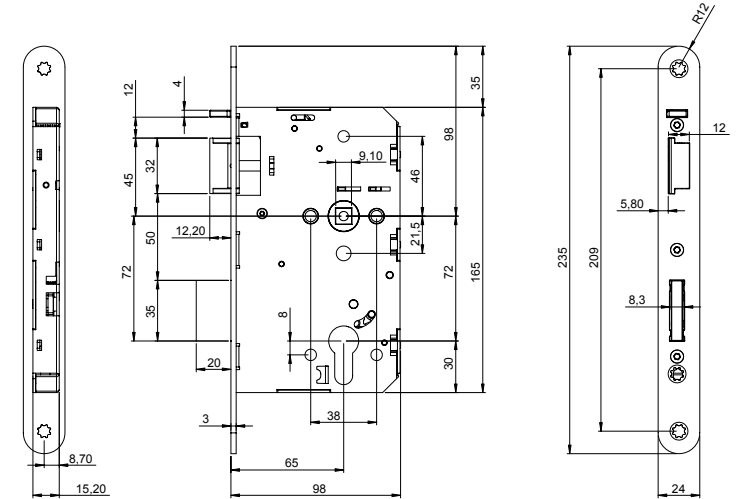

* Versions on request

1NCA Smart



A new range of multistandard readers

1NCA Smart Readers is an innovative range of multi-standard, wall-mounted and weatherproof readers of ISEO Connected products line, designed for access management in residential and light commercial buildings. These readers can be easily installed and can manage internal doors but also outdoor gates since they have the IP66 certification.

Elegant in every situation

All 1NCA Smart Readers combine sleek and minimalist design with premium and durable materials, which is well suited to different environments. Experience the perfect blend of elegance and reliability, elevating your security measures to new heights and unlocking your freedom to move.

FINISH

- Technopolymer
- Glass

COLOR

- Glossy black

Product's functions

- Memorize up to 300 users credentials
- Records the last 1000 events
- Wake up by RFID card detection or phone Bluetooth® (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Light and acoustic signals
- Permanently open mode (office mode) without no extra battery consumption
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

Go to page

MODELS

- Mullion Lockbus p. 19
- Mullion Relay p. 20
- Mullion 485 p. 21
- Mullion Keyboard Lockbus p. 22
- Mullion Keyboard Relay p. 23
- Mullion Keyboard 485 p. 24
- Cable Free RFID p. 25
- Cable Free Keyboard p. 26
- Cable Free Finger p. 27
- Standard RFID p. 28
- Standard Keyboard p. 29
- Standard Finger p. 30

ENVIRONMENTAL CHARACTERISTICS

- IP66
- Max. 95% without condensing

CREDENTIALS

- Badge
- Keyfob
- Bracelet
- Smartphone
- Apple Watch

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1

CERTIFICATIONS

- Compliance to RED, European and UK directives concerning radio equipment regulations

1NCA Smart

Selection guide

1NCA Smart readers are ISEO's new credential readers characterised by an elegant and contemporary design suitable for outdoor installation (IP66). They are available in various models to meet different installation and functional requirements.


ORDER THE PRODUCT IN A FEW STEPS

1

Choose the 1NCA Smart Reader model suitable for your application and click in the column on the right:


Mullion Relay and Mullion Keyboard Relay

Devices with onboard relays for operating directly on electromechanical gates.

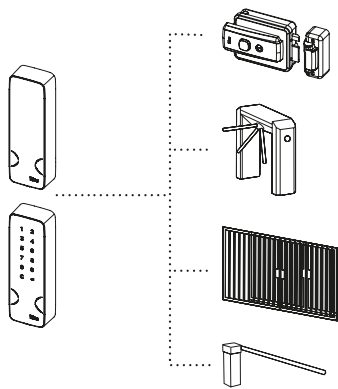


Mullion Lockbus and Mullion Keyboard Lockbus

Lockbus devices for operating electromechanical gates in combination with the Actuator for electromechanical locks. Suitable for replacing the ISEO's Stylos Smart reader.

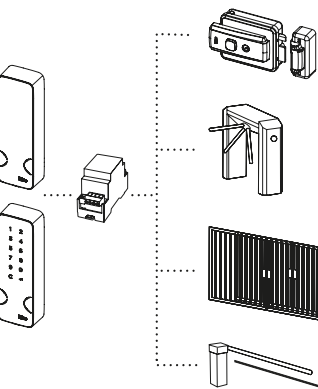


Standard and Mullion 485

RS485 devices for operating doors with ISEO Multiblindo Smart locks or Door Controller Smart.

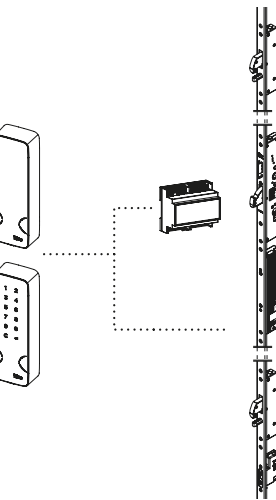

Cable Free RFID, Keyboard and Finger

Battery-powered devices that can be paired via Bluetooth to any ISEO Connected Smart device (Libra X, Aries, MA1A, Relay...), in order to increase their usable credentials.

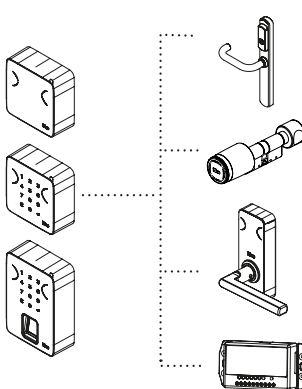

2

Optional.

Choose accessories to complete the system.

Go to page


SELECTION GUIDE

MODELS

→ Mullion Lockbus	p. 19
→ Mullion Relay	p. 20
→ Mullion 485	p. 21
→ Mullion Keyboard Lockbus	p. 22
→ Mullion Keyboard Relay	p. 23
→ Mullion Keyboard 485	p. 24
→ Cable Free RFID	p. 25
→ Cable Free Keyboard	p. 26
→ Cable Free Finger	p. 27
→ Standard RFID	p. 28
→ Standard Keyboard	p. 29
→ Standard Finger	p. 30

1NCA Smart Mullion Lockbus

CREDENTIAL READER RFID/BLEETOOTH®,
WITH LOCKBUS CONNECTION



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc (1W)
Automatic low power mode max 0,4mW
Internal CR2032 3V Lithium battery for RTC (real time clock) backup

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Device with Lockbus interface. Suitable as a replacement of Stylos Smart, to couple with the electric lock actuator (5E2501)

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual,
2 x Screws (3,5x25 countersunk head) and wall plugs (5x25),
Spacer with screws included (cod. 0000IS00354)

ACCESSORIES (NOT INCLUDED)
- Electric lock actuator (cod. 5E2501)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E152315**



Accessories

DIMENSIONS

- Height: 146 mm
- Width: 48 mm
- Depth: 26 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet


 User manual

 Installation guide

 Specifications

1NCA Smart Mullion Relay

CREDENTIAL READER RFID/BLEETOOTH®,
WITH BUILT IN RELAY



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc (1W)
Automatic low power mode max 0,4mW
Internal CR2032 3V Lithium battery for RTC (real time clock) backup

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE

1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual,
2 x Screws (3,5x25 countersunk head) and wall plugs (5x25)

ACCESSORIES (NOT INCLUDED)

- Spacer with screws (cod. 0000IS00354)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E152415**



DIMENSIONS

- Height: 146 mm
- Width: 48 mm
- Depth: 26 mm

ONLINE CONTENT

Web page

Data sheet

Leaflet


User manual

Installation guide

Specifications

1NCA Smart Mullion 485

CREDENTIAL READER RFID/BLUETOOTH®,
WITH RS485 CONNECTION



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc (1W)
Automatic low power mode max 0,4mW
Internal CR2032 3V Lithium battery for RTC (real time clock) backup

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be used in combination with ISEO devices
with RS485 interface

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw
(M2,5x5), instruction manual,
2 x Screws (3,5x25 countersunk head) and wall plugs (5x25)

ACCESSORIES (NOT INCLUDED)
- Spacer with screws (cod. 0000IS00354)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E152215**



DIMENSIONS


- Height: 146 mm
- Width: 48 mm
- Depth: 26 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

1NCA Smart Mullion Keyboard Lockbus

CREDENTIAL READER WITH KEYBOARD, RFID
CONTACTLESS MULTISTANDARD, BLUETOOTH®
WITH LOCKBUS CONNECTION



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc (1W)
Automatic low power mode max 0,4mW
Internal CR2032 3V Lithium battery for RTC (real time clock) backup

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Device with Lockbus interface. Suitable as a replacement of Stylos Smart, to couple with the electric lock actuator (5E2501)

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual,
2 x Screws (3,5x25 countersunk head) and wall plugs (5x25),
spacer with screws (cod. 0000IS00354)

ACCESSORIES (NOT INCLUDED)
- Electric lock actuator (cod. 5E2501)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E152325**



DIMENSIONS


- Height: 146 mm
- Width: 48 mm
- Depth: 26 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

1NCA Smart Mullion Keyboard Relay

CREDENTIAL READER WITH KEYBOARD, RFID
CONTACTLESS MULTISTANDARD, BLUETOOTH®,
WITH BUILT IN RELAY



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc (1W)
Automatic low power mode max 0,4mW
Internal CR2032 3V Lithium battery for RTC (real time clock) backup

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 reader, 1fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual,
2 x Screws (3,5x25 countersunk head) and wall plugs (5x25).

ACCESSORIES (NOT INCLUDED)
- Spacer with screws (cod. 0000IS00354)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E152425**



DIMENSIONS


- Height: 146 mm
- Width: 48 mm
- Depth: 26 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

1NCA Smart Mullion Keyboard 485

CREDENTIAL READER RFID/BLEETOOTH® WITH
KEYBOARD, WITH RS485 CONNECTION



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc (1W)
Automatic low power mode max 0,4mW
Internal CR2032 3V Lithium battery for RTC (real time clock) backup

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be used in combination with ISEO devices
with RS485 interface

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw
(M2,5x5), instruction manual,
2 x Screws (3,5x25 countersunk head) and wall plugs (5x25)

ACCESSORIES (NOT INCLUDED)
- Spacer with screws (cod. 0000IS00354)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E152225**



DIMENSIONS


- Height: 146 mm
- Width: 48 mm
- Depth: 26 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

1NCA Smart Cable Free RFID

CABLE FREE RFID AND BLUETOOTH®, BATTERY OPERATED, CAN BE COUPLED TO ANY ISEO CONNECTED SMART LOCKING DEVICE



Technical features

FIRMWARE
ARGO

POWER UNIT
4 Alkaline AA batteries
Max Power consumption 1W
Automatic low power mode max 0,4mW

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 reader, 4 Alkaline AA batteries, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25).

code **5E1511155**


DIMENSIONS
- Height: 82 mm
- Width: 82 mm
- Depth: 26 mm

ONLINE CONTENT

- | | |
|------------|--------------------|
| Web page | User manual |
| Data sheet | Installation guide |
| Leaflet | Specifications |

1NCA Smart Cable Free Keyboard

CABLE FREE RFID AND BLUETOOTH® READER, BATTERY OPERATED, FEATURING A CAPACITIVE NUMERIC KEYBOARD, CAN BE COUPLED TO ANY ISEO CONNECTED SMART LOCKING DEVICE



Technical features

FIRMWARE
ARGO

POWER UNIT
4 Alkaline AA batteries
Max Power consumption 1W
Automatic low power mode max 0,4mW

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +70°C

PACKAGE
1 reader, 4 Alkaline AA batteries, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25).

code **5E1511255**


DIMENSIONS
- Height: 82 mm
- Width: 82 mm
- Depth: 26 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

1NCA Smart Cable Free Finger

CABLE FREE RFID AND BLUETOOTH® READER, BATTERY OPERATED, FEATURING A CAPACITIVE NUMERIC KEYBOARD AND A FINGERPRINT READER, CAN BE COUPLED TO ANY ISEO CONNECTED SMART LOCKING DEVICE

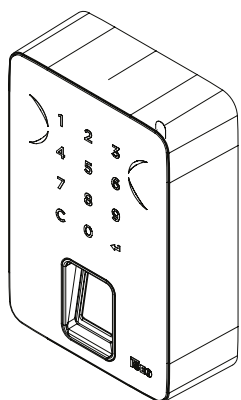

code **5E1511355**

DIMENSIONS

- Height: 120 mm
- Width: 82 mm
- Depth: 35 mm

Technical features

FIRMWARE
ARGO

POWER UNIT
4 Alkaline AA batteries
Max Power consumption 1W
Automatic low power mode max 0,4mW

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +70°C


PACKAGE
1 reader, 4 Alkaline AA batteries, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25).

ONLINE CONTENT

- | | |
|------------|--------------------|
| Web page | User manual |
| Data sheet | Installation guide |
| Leaflet | Specifications |

1NCA Smart Standard RFID

CREDENTIAL READER RFID/BLEETOOTH®,
WITH RS485 CONNECTION



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc - Max power consumption = 1W

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be used in combination with ISEO devices with RS485 interface

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 1NCA reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25)

ACCESSORIES (NOT INCLUDED)
- Spacer with screws (cod. 0000IS00355)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E1512155**



Accessories

DIMENSIONS


- Height: 82 mm
- Width: 82 mm
- Depth: 23,5 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

1NCA Smart Standard Keyboard

CREDENTIAL READER WITH NUMERIC KEYBOARD,
RFID/BLEUETOOTH®, WITH RS485 CONNECTION



Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc - Max power consumption = 1W

ALERTS
- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be used in combination with ISEO devices with RS485 interface

MOUNTING
- Wall mounted

ENVIRONMENTAL FEATURES
- IP66
- RH 95% max

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25)

ACCESSORIES (NOT INCLUDED)
- Spacer with screws (cod. 0000IS00355)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

code **5E1512255**



Accessories

DIMENSIONS

- Height: 82 mm
- Width: 82 mm
- Depth: 23,5 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet


 User manual

 Installation guide

 Specifications

1NCA Smart Standard Finger

CREDENTIAL READER WITH NUMERIC KEYBOARD, FINGER READER, RFID/BLEETOOTH®, WITH RS485 CONNECTION

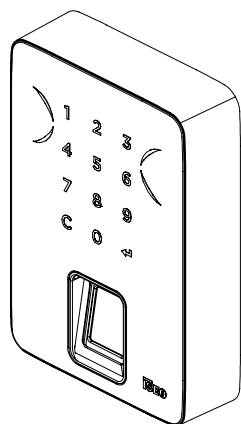

code **5E1512355**

Accessories

DIMENSIONS

- Height: 120 mm
- Width: 82 mm
- Depth: 25,5 mm

Technical features

FIRMWARE
ARGO

POWER UNIT
9÷24 Vdc - Max power consumption = 1W

ALERTS

- Led 3-colour series green, red, blue
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

- Can be used in combination with ISEO devices with RS485 interface

MOUNTING

- Wall mounted

ENVIRONMENTAL FEATURES

- IP66
- RH 95% max

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-20°C ÷ +70°C

PACKAGE
1 reader, 1 fixing bracket, Torx T8 key, 1 x Fixing bracket Torx screw (M2,5x5), instruction manual, 2 x Screws (3,5x25 countersunk head) and wall plugs (5x25)

ACCESSORIES (NOT INCLUDED)

- Spacer with screws (cod. 0000IS00356)
- Power supply 24Vdc 1.5 A power supply (cod. 5E3506)

ONLINE CONTENT

Web page

Data sheet

Leaflet


User manual

Installation guide

Specifications

1NCA Smart


Accessories



ELECTRIC LOCK ACTUATOR

1 relay + 1 booster.
3 inputs (1 digital, 1 analog, 1 digital/ analog)
Lockbus interface.
8-30Vdc Power Supply
DIN35 rail mounting.
Package: 1 actuator, instruction manual.

1 5E2501




SPACER WITH SCREWS

2 x Screws (3,5x25 flat-head)
4 x Screws (3x8)


For Mullion

1 0000IS00354




For standard RFID and keyboard

1 0000IS00355



For standard finger

1 0000IS00356



POWER SUPPLY UNIT 24Vdc - 70W

Input 120-230Vac. Output 24Vdc 1,5A.
DIN35 rail mounting.

Package: 1 Power Supply, instruction manual

1 5E3506

Aries Smart 2.1



Make your door Smart

The installation flexibility and simplicity make it the perfect solution for community and residential access control (shopping malls, industries, public and private offices, schools and universities, hospitals and retired hostels, residences and hotels, etc.).

For many applications

Aries electronic trim set can be fit on most doors. It is conceived to be used also with the majority of mechanical locks, for the utmost installation flexibility. The battery operation and cableless technology makes Aries the perfect solution for access management, ensuring utmost flexibility and low installation costs both on new and existing doors.

FINISH

Stainless

Product's functions

- Handle movement detection
- Emergency mechanical key detection
- Privacy signal
- Memorize up to 300 users credentials
- Records the last 1000 events
- Battery-operated device with charge status detection
- Wake up by RFID card detection or phone Bluetooth® (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Light and acoustic signals
- Permanently open mode (office mode) without no extra battery consumption
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

Go to page

MODELS

- Standard p. 34
- For panic devices p. 35
- For custom handles p. 36
- For custom handles for panic devices p. 37
- For DIN lock p. 38
- For fire locks p. 39
- For Premi Apri Meroni locks p. 40

ENVIRONMENTAL CHARACTERISTICS

- IP54
- IP55 with resistance to salty atmosphere

CREDENTIALS

- Badge
- Keyfob
- Bracelet
- Smartphone
- Apple Watch

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1


CERTIFICATIONS

- EN 179 certification available in combination with specific locks
- EN 1125 certification available in combination with specific panic devices and locks

Aries Smart 2.1

Selection guide

The Aries electronic handle is available in different versions to suit the customers' needs and the characteristics of the doors on which it is to be installed. The articles required for correct installation are various and must be chosen from the options available both according to the characteristics and dimensions of the door and to the specific usage requirements. To ensure the correctness and completeness of the order, below is a guide for choosing the various articles that make up the set for each door.

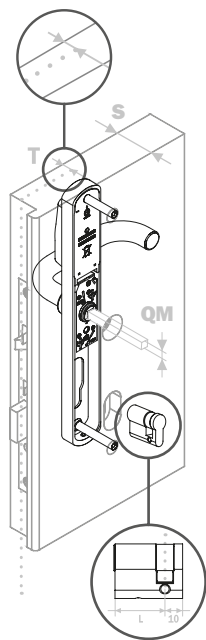

ORDER THE PRODUCT IN A FEW STEPS

1

Check the **type and dimensions of the door**
(in case of handle replacement on existing door)

3

Compose the necessary **spindle and screws kit** and check whether an adapter **plate kit is required** (for panic devices and DIN locks).

Choose from menu

Spindle and screws kit

Adapter plate kit

Other accessories

2

Choose the Aries Smart handle's model **in the right column**, generating the code thanks to the configurator on the product page

4

Optional.
Choose a **lock to match** from those available.

Go to page

Go to page


SELECTION GUIDE

MODELS

- Standard p. 34
- For panic devices p. 35
- For custom handles p. 36
- For custom handles for panic devices p. 37
- For DIN lock p. 38
- For fire locks p. 39
- For Premi Apri Meroni locks p. 40

Aries Smart 2.1 Standard

ELECTRONIC TRIM RFID/BLEETOOTH® SET STANDARD

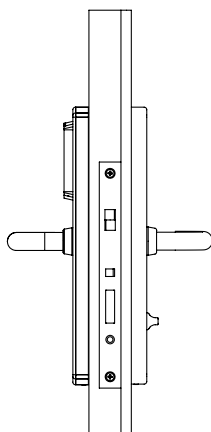

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be fit on any door (wooden, aluminium, metal, PVC and so on)
- Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories)
- Suitable for use fire/smoke resisting door assemblies
- 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm
- Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole
- Latchbolt only or automatic deadbolt function
- Max handle rotation angle 40°

(*) with adaptor

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP54
- IP55 with resistance to salty atmosphere

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 trim (pair), 2 batteries, 2 mm hex key, instruction manual.
NOTE: Handle follower and fixing screws set, mechanical override cylinder and mechanical lock not included.

ACCESSORIES (NOT INCLUDED)
- Handle follower and screws set (mandatory)
- Override cylinder
- Override keys set
- Underplate
- Lock

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm
- Handle length: 131 mm from plate center

Weight
1530 g

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Maintenance manual

Aries Smart 2.1 For panic devices

ELECTRONIC TRIM RFID/BLEUETOOTH® SET FOR PANIC DEVICES

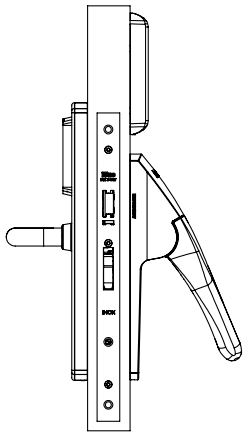

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be fit on any door (wooden, aluminium, metal, PVC and so on)
- Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories)
- Suitable for use fire/smoke resisting door assemblies
- 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm
- Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole
- Latchbolt only or automatic deadbolt function
- Max handle rotation angle 40°

(*) with adaptor

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP54
- IP55 with resistance to salty atmosphere

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 trim, 1 battery holder, 2 batteries, 2 mm hex key, instruction manual.
NOTE: Handle follower and fixing screws set, adapter kit plate, mechanical override cylinder and mechanical lock not included.

ACCESSORIES (NOT INCLUDED)
- Handle follower and screws set (mandatory)
- Override cylinder
- Override keys set
- Underplate
- Lock
- Adapter plate kit for panic devices installation

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm
- Handle length: 131 mm from plate center

Weight
1530 g

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Maintenance manual

Aries Smart 2.1 For custom handles

ELECTRONIC TRIM RFID/BLEETOOTH® SET FOR CUSTOM HANDLES

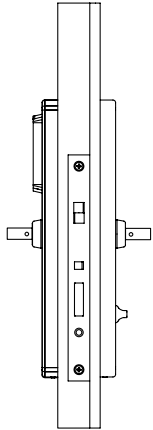

Technical features

FIRMWARE ARGO

RELEASE 2.1

POWER UNIT 2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS - LEDs: 1 Green, 1 Red - Multi-frequency buzzer

PRODUCT COMPATIBILITY - Can be fit on any door (wooden, aluminium, metal, PVC and so on) - Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories) - Suitable for use fire/smoke resisting door assemblies - 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm - Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole - Latchbolt only or automatic deadbolt function - Max handle rotation angle 40°

(*) with adaptor

MOUNTING - On door

ENVIRONMENTAL FEATURES - IP54 - IP55 with resistance to salty atmosphere

WORKING TEMPERATURE -20°C ÷ +60°C

STORAGE TEMPERATURE -25°C ÷ +75°C

PACKAGE Industrial Packaging: 10 trims (pairs), 20 batteries, 2 mm hex key, instruction manual. NOTE: - handles, handle follower and fixing screws set, mechanical override cylinder and mechanical lock not included. - For custom handle specifications, please see the corresponding document on ideo.com

ACCESSORIES (NOT INCLUDED) - Handle follower and screws set (mandatory) - Override cylinder - Override keys set - Underplate - Lock

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm

Weight
1530 g

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Maintenance manual

Aries Smart 2.1 For custom handles for panic devices

ELECTRONIC TRIM RFID/BLEUETOOTH® SET FOR PANIC DEVICES

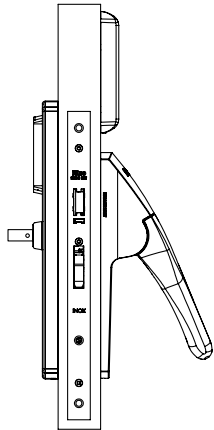

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be fit on any door (wooden, aluminium, metal, PVC and so on)
- Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories)
- Suitable for use fire/smoke resisting door assemblies
- 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm
- Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole
- Latchbolt only or automatic deadbolt function
- Max handle rotation angle 40°

(*) with adaptor

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP54
- IP55 with resistance to salty atmosphere

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
Industrial Packaging: 10 trims, 10 battery holder, 20 batteries, 2 mm hex key, instruction manual.
NOTE:

- Internal and external handles, handle follower and fixing screws set, mechanical override cylinder and mechanical lock not included.
- For custom handle specifications, please see the corresponding document on ideo.com

ACCESSORIES (NOT INCLUDED)
- Handle follower and screws set (mandatory)
- Override cylinder
- Override keys set
- Underplate
- Lock
- Adapter plate kit for panic devices installation

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm

Weight
1530 g

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Maintenance manual

Aries Smart 2.1 For DIN lock

ELECTRONIC TRIM RFID/BLEUETOOTH® SET FOR DIN LOCK

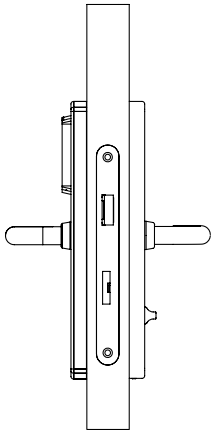

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm
- Handle length: 131 mm from plate center

Weight
1530 g

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be fit on any door (wooden, aluminium, metal, PVC and so on)
- Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories)
- Suitable for use fire/smoke resisting door assemblies
- 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm
- Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole
- Latchbolt only or automatic deadbolt function
- Max handle rotation angle 40°

(*) with adaptor

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP54
- IP55 with resistance to salty atmosphere

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 trim (pairs), 2 batteries, 2 mm hex key, instruction manual.
NOTE: handle set, fastener screws, adapter plate kit, emergency cylinder and mechanical lock not included.

ACCESSORIES (NOT INCLUDED)
- Handle follower and screws set (mandatory)
- Override cylinder
- Override keys set
- Underplate
- Lock
- Adapter plate kit for DIN locks installation

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Maintenance manual

Aries Smart 2.1 For fire locks

ELECTRONIC TRIM RFID/BLEUETOOTH® SET FOR FIRE LOCKS

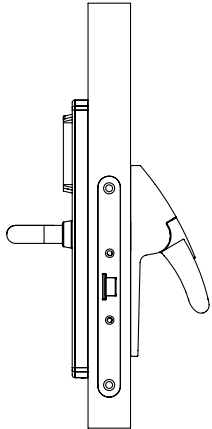

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm
- Handle length: 131 mm from plate center

Weight
1530 g

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

- Can be fit on any door (wooden, aluminium, metal, PVC and so on)
- Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories)
- Suitable for use fire/smoke resisting door assemblies
- 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm
- Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole
- Latchbolt only or automatic deadbolt function
- Max handle rotation angle 40°

(*) with adaptor

MOUNTING
- On door

ENVIRONMENTAL FEATURES

- IP54
- IP55 with resistance to salty atmosphere

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 trim, 1 adapter plate kit, 1 handle set, 2 batteries, 2 mm hex key, instruction manual.
NOTE: handle set and fastener screws, mechanical lock and panic devices not included.

ACCESSORIES (NOT INCLUDED)

- Handle follower and screws set (mandatory)
- Override cylinder
- Override keys set
- Underplate
- Lock

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Maintenance manual

Aries Smart 2.1 For Premi Apri Meroni locks

ELECTRONIC TRIM RFID/BLEUETOOTH® SET FOR PREMI APRI MERONI LOCKS

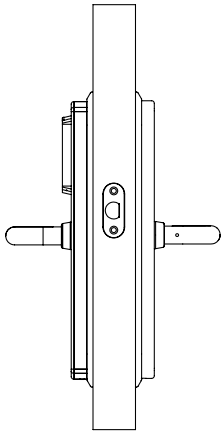

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Can be fit on any door (wooden, aluminium, metal, PVC and so on)
- Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories)
- Suitable for use fire/smoke resisting door assemblies
- 7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm
- Backset: 25 mm minimum, if using nylon underplate to cover holes on door backset minimum 40 mm. European profile cylinder hole
- Latchbolt only or automatic deadbolt function
- Max handle rotation angle 40°

(*) with adaptor

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP54
- IP55 with resistance to salty atmosphere

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 trim (pair) 1 plastic underplate, 2 batteries, 2 mm hex key, instruction manual.
NOTE: handle set and fastener screws, override cylinder and mechanical lock not included.

ACCESSORIES (NOT INCLUDED)
- Handle follower and screws set (mandatory)
- Override cylinder
- Override keys set
- Underplate
- Lock

 Code configurator

 Accessories

DIMENSIONS

- Plate width: 38 mm
- Plate length: 294 mm
- Plate thickness: 17 mm
- Handle length: 131 mm from plate center

Weight
1530 g

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual

 Installation guide


 Specifications

 Maintenance manual

Aries Smart 2.1

Accessories

SPINDLE AND SCREWS KIT (1/2) FOR IP54 VERSION

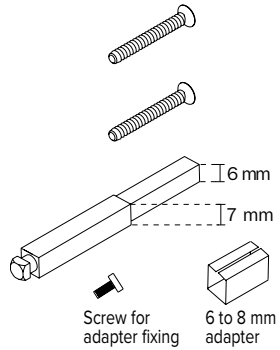

SCREWS AND HANDLE FOLLOWER KIT

2 screws M5 with threadlocking.

Package: 2 screws, 1 handle follower

NOTE: Select the right kit depending on door thickness.

QM 7 mm Spindle

Door thickness **S** from 40 to 55 mm

1 201E074055A

Door thickness **S** from 55 to 70 mm

1 201E075570A

Door thickness **S** from 70 to 85 mm

1 201E077085A

QM 8 mm Spindle

Door thickness **S** from 40 to 55 mm

1 201E004055A

Door thickness **S** from 55 to 70 mm

1 201E005570A

Door thickness **S** from 70 to 85 mm

1 201E007085A

Door thickness MAX 125 mm (to be cut)

1 201E008010A

QM 9 mm Spindle (for fire doors)

Door thickness **S** from 40 to 55 mm

1 201E094055A

Door thickness **S** from 55 to 70 mm





1 201E095570A

Door thickness **S** from 70 to 85 mm

1 201E097085A

Door thickness **S** from 85 to 125 mm

1 201E098010A



SCREWS AND HANDLE FOLLOWERS KIT

For panic devices installation.

Followers 9 mm and fixing screws for doors thickness up to 85 mm.


NOTE: to be cut according to door thickness

1 201E915570A

ADAPTER FOR HANDLE FOLLOWER

8 to 9 mm adapter

10 5060000900092

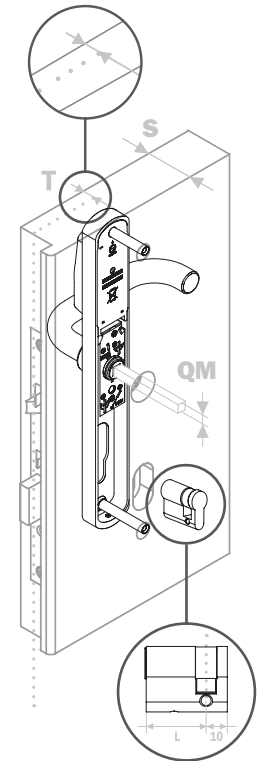

Aries Smart 2.1

Accessories


STAINLESS STEEL SPINDLE AND SCREWS KIT (2/2) FOR IP55 VERSION

SCREWS AND HANDLE FOLLOWER KIT

2 screws M5 with threadlocking.

Package: 2 screws, 1 handle follower

NOTE: Select the right kit depending on door thickness.

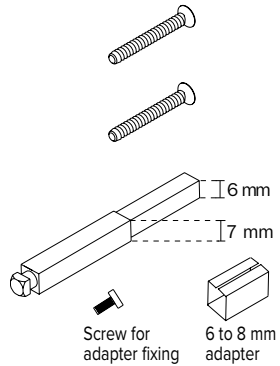

QM 7 mm Spindle

Door thickness **S** from 40 to 55 mm


1 0000A00244

Door thickness **S** from 55 to 70 mm

1 0000A00245

Door thickness **S** from 70 to 85 mm

1 0000A00246



QM 8 mm Spindle

Door thickness **S** from 40 to 55 mm

1 0000A00234

Door thickness **S** from 55 to 70 mm


1 0000A00235

Door thickness **S** from 70 to 85 mm

1 0000A00236

Door thickness MAX 125 mm (to be cut)

1 0000A00237



QM 9 mm Spindle (for fire doors)

Door thickness **S** from 40 to 55 mm

1 0000A00238

Door thickness **S** from 55 to 70 mm


1 0000A00239

Door thickness **S** from 70 to 85 mm

1 0000A00240

Door thickness **S** from 85 to 125 mm

1 0000A00241




SCREWS AND HANDLE FOLLOWERS KIT

For panic devices installation.

Followers 9 mm and fixing screws for doors thickness up to 85 mm.

NOTE: to be cut according to door thickness

1 0000A00263

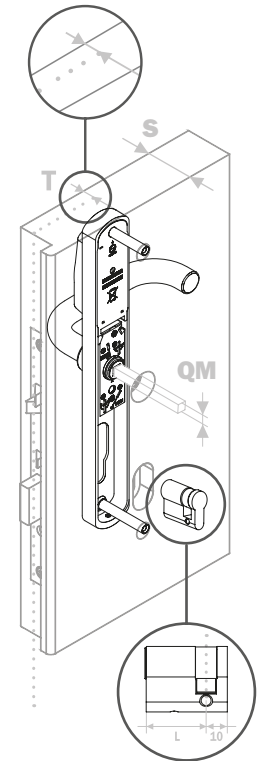

Aries Smart 2.1

Accessories

ADAPTER PLATE KIT

ADAPTER PLATE KIT
For panic devices installation with
series 214* panic lock case (DIN 72 mm center distance).
Package: 1 adapter plate.

1 529E000040

ADAPTER PLATE KIT
For RIM panic devices Idea Push installation
Package: plates, fixing screws, accessories.

1 567E0000540

ADAPTER PLATE KIT
For DIN locks installation
Package: plates


1 529E080054

ADAPTER PLATE KIT
Fire Doors Installation
Package: 1 plate with 2 screws

1 201E093054A

Aries Smart 2.1

Accessories



OVERRIDE MECHANICAL CYLINDER

Monoprofile with usage detection plate. High Security ISEO R90 Factory.
Up to 3 mechanical recodings. KA on the same installation. Nickel plated finish. Without keys.
Package: 1 cylinder, 1 fixing screw

VISIBLE CYLINDER		HIDDEN CYLINDER	
$08 < T < 13$	$L = 30 + 10 \text{ mm}$	$17 < T < 27$	$L = 30 + 10 \text{ mm}$
$13 < T < 23$	$L = 40 + 10 \text{ mm}$	$27 < T < 37$	$L = 40 + 10 \text{ mm}$
$23 < T < 33$	$L = 50 + 10 \text{ mm}$	$37 < T < 47$	$L = 50 + 10 \text{ mm}$


S = door thickness (mm)

T = distance between front plate axis of symmetry of mechanical lock and the external door edge

NOTE: Select the right dimension depending on door and lock features.

Override keys to be ordered separately.

Lenght L 30 - 10 mm	1	82RC030A19RF.08
Lenght L 40 - 10 mm	1	82RC040A19RF.08
Lenght L 50 - 10 mm	1	82RC050A19RF.08




OVERRIDE KEYS KIT

3 R90 keys in sequence.

Property cards.

Package: 3 keys, 2 property cards

	1	80RCKR0F0
--	---	-----------




PLASTIC UNDERPLATE

Black plastic underplate to cover up eventually visible key holes.

Dimensions: H=312 mm, L=70 mm.

Package: 1 underplate.

	1	529E00000
--	---	-----------

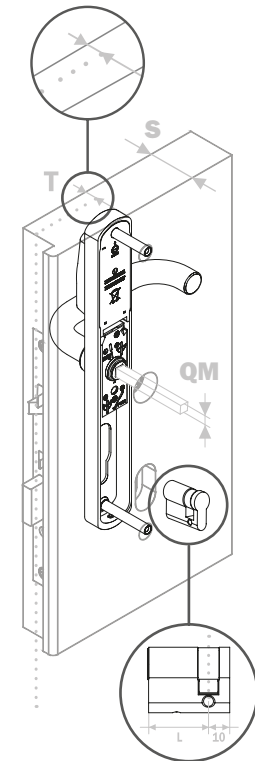

Aries Smart 2.1


Accessories

AESTHETIC EXTERNAL AND INTERNAL COVER



AESTHETIC EXTERNAL COVER
Without cylinder hole in the cover.
Package: 1 cover

Inox	1	561E1120240
------	---	-------------



AESTHETIC INTERNAL COVER
Without privacy.
Package: 1 cover

Inox	1	561E1130240
------	---	-------------



AESTHETIC EXTERNAL COVER
With cylinder hole.
Package: 1 cover


70 mm center distance		
Inox	1	561E1420240

72 mm center distance		
Inox	1	561E1520240

85 mm center distance		
Inox	1	561E1220240

88 mm center distance		
Inox	1	561E1620240

92 mm center distance		
Inox	1	561E1320240




AESTHETIC INTERNAL COVER
With privacy.
Package: 1 cover

Inox	1	561E1330240
------	---	-------------

Aries Smart 2.1

Accessories

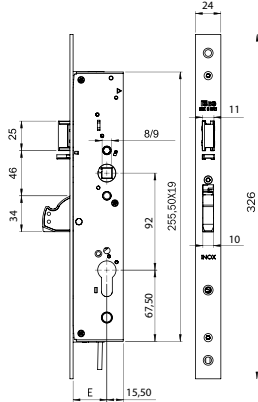

LOCK CAN BE COMBINED (1/3)

MULTIBLINDO EASY EXIT LATERAL.

Automatic lock with emergency function to be used with Aries.

Locking: deadbolt automatic relocking when the door is closed.

Opening: latchbolt and deadbolt operated by the handle or the key.

Center distance 92 mm. The microswitch detects and signals the deadbolt status.

Right or left latchbolt, non reversible. To be ordered separately: striking plates 03323*.

Package: 1 lock, instructions.

ONE-PIECE HANDLE FOLLOWER 9 mm

8/9 mm square spindle code 201E094055A included.

Flat front-plate		Backset mm		
326x24x3	INOX	35 DIN SX	1	7A1A163522S.A9
		35 DIN DX	1	7A1A163522D.A9
		40 DIN SX	1	7A1A164022S.A9
		40 DIN DX	1	7A1A164022D.A9
		45 DIN SX	1	7A1A164522S.A9
		45 DIN DX	1	7A1A164522D.A9
		50 DIN SX	1	7A1A165022S.A9
		50 DIN DX	1	7A1A165022D.A9
		55 DIN SX	1	7A1A165522S.A9
		55 DIN DX	1	7A1A165522D.A9
		60 DIN SX	1	7A1A166022S.A9
		60 DIN DX	1	7A1A166022D.A9
		65 DIN SX	1	7A1A166522S.A9
		65 DIN DX	1	7A1A166522D.A9


ONE-PIECE HANDLE FOLLOWER 8 mm

Flat front-plate		Backset mm		
326x24x3	INOX	35 DIN SX	1	7A1A163522S.A8
		35 DIN DX	1	7A1A163522D.A8
		40 DIN SX	1	7A1A164022S.A8
		40 DIN DX	1	7A1A164022D.A8
		45 DIN SX	1	7A1A164522S.A8
		45 DIN DX	1	7A1A164522D.A8
		50 DIN SX	1	7A1A165022S.A8
		50 DIN DX	1	7A1A165022D.A8
		55 DIN SX	1	7A1A165522S.A8
		55 DIN DX	1	7A1A165522D.A8
		60 DIN SX	1	7A1A166022S.A8
		60 DIN DX	1	7A1A166022D.A8
		65 DIN SX	1	7A1A166522S.A8
		65 DIN DX	1	7A1A166522D.A8

Aries Smart 2.1

Accessories

LOCK CAN BE COMBINED (2/3)



Full-size scale

ADJUSTABLE closed striking plate for CENTRAL LOCK
MULTIBLINDO EASY.

Material: stainless steel.



With mechanical striker.

Flat front-plate 24x3x220 DIN SX


10 033230

Flat front-plate 24x3x220 DIN DX

10 033231

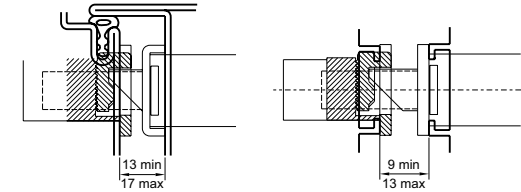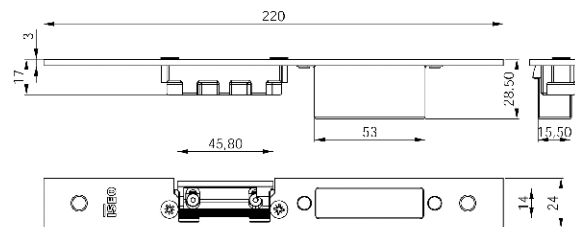

In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate



Full-size scale

ADJUSTABLE closed striking plate for CENTRAL LOCK
MULTIBLINDO EASY.

Material: stainless steel.



With mechanical striker.

U-front plate 24x6x220 DIN SX

10 033232

U-front plate 24x6x220 DIN DX

10 033233

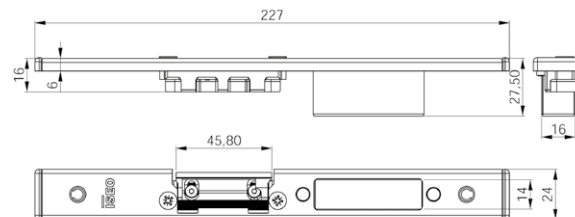

In case the space between the striking plate and the door is greater, it is necessary to use a spacer for the striking plate

Aries Smart 2.1

Accessories

LOCK CAN BE COMBINED (3/3)

PANIC FIRE-RATED SELF-LOCKING LOCK

Panic self-locking lock for fire-resistant doors.

When the leaf is approached, the deadbolt of the lock is automatically engaged.

Internal operation:

The key operates the external handle (function B) and retracts the latch and deadbolt (only with function E).

The panic bar and/or emergency handle always retract the latch and deadbolt.

External operation:



The key enables/disables the handle that recalls the latch and deadbolt (function B).

72 mm center distance. 9 mm sintered steel handle follower set with 30° rotation.

Self-locking 20 mm deadbolt.

Zinc plated front plate (stainless steel option) with round edges (square edges option) 24x3 mm (20x3 mm option). NK sintered steel latch.

Compatible with Euro profile cylinder, with DIN cam to be ordered separately.

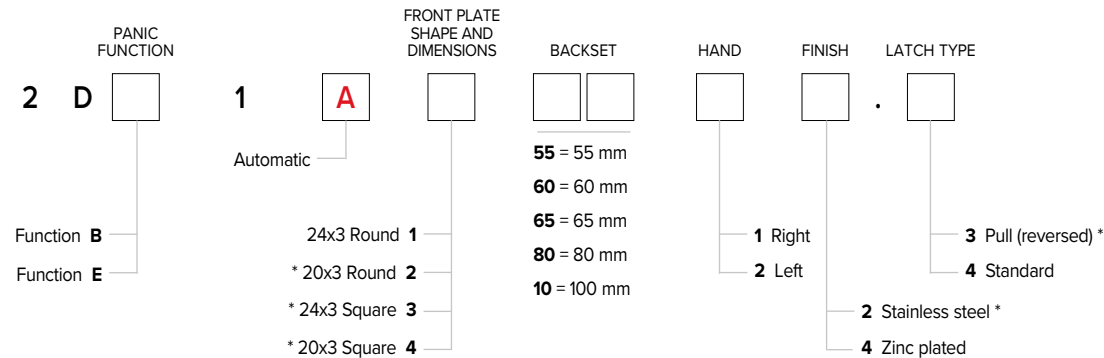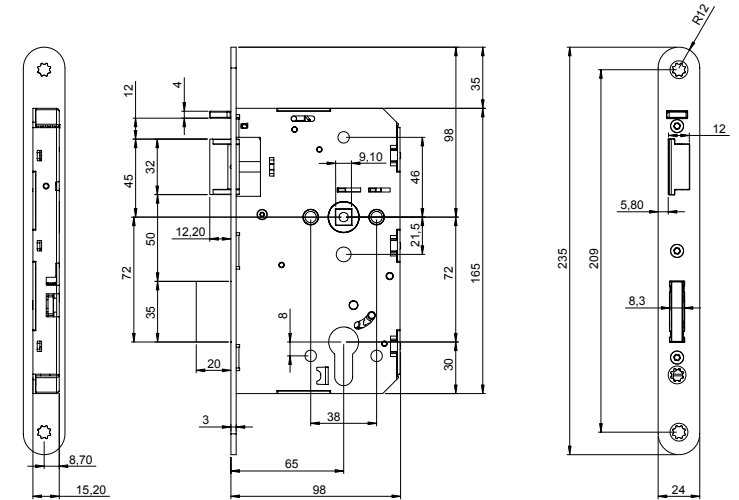

* Versions on request

Smart Locker 2.1



For offices and shared spaces

Smart Locker can be installed on a wide range of cabinets and lockers in order to keep users' personal belongings safe in offices, businesses, and shared spaces or any other situation where personal belongings need to be temporarily safeguarded.

Automatic locking

By closing the door of the cabinet, Smart Locker will automatically lock. The Smart Locker is battery powered allowing easy installation in new lockers or retrofit in existing lockers currently operated by keys.

Product's functions

- Automatic locking just pulling the door ajar
- Memorize up to 300 users credentials
- Records the last 1000 events
- Battery-operated device with charge status detection
- Wake up by RFID card detection or phone Bluetooth® (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Light and acoustic signals
- Permanently open mode (office mode) without no extra battery consumption
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

FINISH

 Technopolymer

COLOR

 Anthracite

ENVIRONMENTAL CHARACTERISTICS

- IP20

CREDENTIALS

- Badge
- Keyfob
- Bracelet
- Smartphone
- Apple Watch

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1


Go to page

MODELS

→ Electronic lock for cabinets p. 50

Smart **Locker** 2.1 Electronic lock for cabinets

RFID/BLEUETOOTH® ELECTRONIC LOCK FOR CABINETS AND LOCKERS

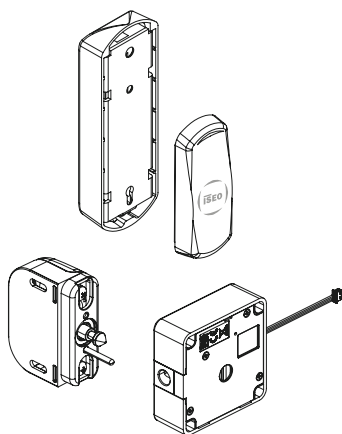

Technical features

FIRMWARE
ARGO

RELEASE
2.1

POWER UNIT
2 alkaline batteries 1.5V type AA

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Smart Locker can be installed on a wide range of cabinets and lockers in order to protect users' personal belongings safe

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP20

WORKING TEMPERATURE
-20°C ÷ +60°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 RFID reader, 2 batteries, lock with pin latch, fixing screws, instruction manual

ACCESSORIES (NOT INCLUDED)
- Accessory for electric emergency (0000IS00253)

code **1ES10165**



DIMENSIONS

External reader dimensions (with support):

- Width: 39 mm
- Height: 86 mm
- Depth: 20 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Accessory for electrical emergency

Smart **Locker** 2.1


Accessories



ACCESSORY FOR ELECTRIC EMERGENCY
Package: 1 battery holder.
NOTE: BATTERIES NOT INCLUDED.

1	0000IS00253
---	-------------

Libra X Smart

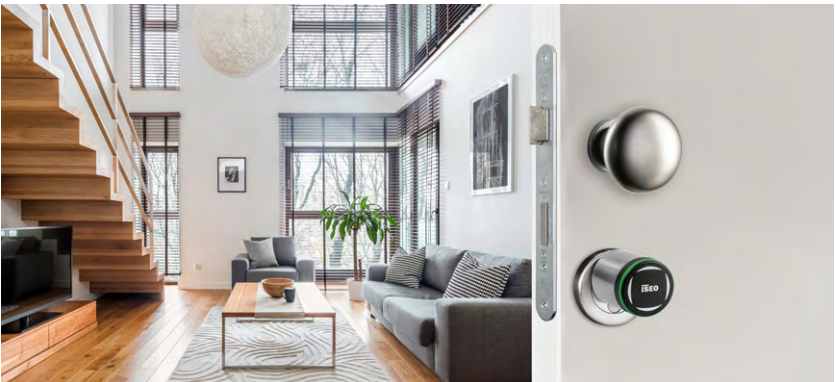

Suitable for different applications

Thanks to its easy and straightforward installation, the Libra X electronic modular cylinder is the ideal universal solution for access control, both for retrofit applications replacing European profile mechanical cylinders and for installations on new doors.

Easy to install

Battery-powered operation and the absence of electrical wiring ensure maximum flexibility and low installation costs, both for new installations and retrofit applications on existing doors.

FINISH

Stainless

COLOUR

Matt black

Matt white

Product features

- Wake up by RFID card detection or phone (patented)
- Battery-operated device with charge status detection
- Low energy consumption device
- Permanently open mode (office mode) without extra battery consumption
- Memorize up to 300 users credentials
- Records the last 1000 events
- Real Time Clock/Calendar
- Light and acoustic signals
- Programming and software updates by ARGO App on iOS and Android devices
- Block the Standard Users allowing access only to VIP users

Go to page

MODELS

- Standard p. 54
- Premium p. 55
- Half p. 56
- Double p. 57
- Removable reader and Extension plug 16 mm p. 58
- Removable reader and Extension plug 75 mm p. 59
- Dummy-knob p. 60
- Oval Australian p. 61
- Oval Scandinavian p. 62

ENVIRONMENTAL FEATURES

- IP66
- IP67
- IP68
- IP69

ACCESS CREDENTIALS

- Apple Watch
- Badge
- Bracelet
- Keyfob
- Smartphone

COMMUNICATION INTERFACE

- Bluetooth® Low Energy 5.1
- RFID ISO14443B/MIFARE ISO14443A


CERTIFICATIONS

- EN 15684:2020 Standard Duty version 16B40D30 (DESFire Cards)
- EN 15684:2020 Heavy Duty version 16B40D3D (DESFire Cards)
- SKG***for HD (Heavy Duty) version

Libra X Smart

Selection guide

The Libra X electronic modular cylinder represents the ideal and universal solution for access control both for retrofit installations to replace of mechanical European profile cylinders (in addition to the Australian and Scandinavian oval cylinder versions), and for installations on new doors.

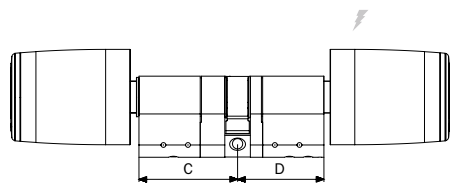

ORDER THE PRODUCT IN A FEW STEPS

1

Check the door type
and the dimensions of the cylinder
(in the case of replacement on an existing door).

2

Choose the Libra X model
in the column on the right, generating
the code thanks to the configurator on the
product page.

3

Optional.
See accessory sheets for modifications
and component replacements.

Choose from menu

- [Pre-assembled modules](#)
- [Modular Libra assembled components](#)
- [Electronic knob spare parts](#)
- [Premium knob cover \(RFID and mechanical version\)](#)
- [Standard mechanical knob](#)
- [Anti-intrusion accessories](#)
- [Assembly/Disassembly tooling kit](#)
- [Assembly tooling kit for modular cylinders](#)
- [Packaging design](#)


Go to page

SELECTION GUIDE

MODELS		
→	Standard	p. 54
→	Premium	p. 55
→	Half	p. 56
→	Double	p. 57
→	Removable reader and Extension plug 16 mm	p. 58
→	Removable reader and Extension plug 75 mm	p. 59
→	Dummy-knob	p. 60
→	Oval Australian	p. 61
→	Oval Scandinavian	p. 62

Libra X Smart Standard

MODULAR CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEUETOOTH® KNOB (FREE ROTATION) AND INTERNAL MECHANICAL KNOB (STANDARD TYPE)

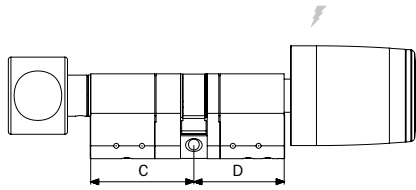

 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:

- External diameter: 36 to 39 mm
- Length: 49 mm

"Standard" mechanical knob dimensions:

- External diameter: 30 mm
- Length: 31 mm

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, fastener screw, 2 mm hex key, instruction sheet.

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled modular Libra components
- Electronic knob spare parts
- Premium knob covers (RFID and mechanical versions)
- Standard mechanical knob
- Anti-burglary accessories
- Assembly/disassembly tool set
- Installation tools for modular cylinders
- Design packaging

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Warnings

Libra X Smart Premium

MODULAR CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEUETOOTH[®] KNOB (FREE ROTATION) AND INTERNAL MECHANICAL KNOB (PREMIUM TYPE)

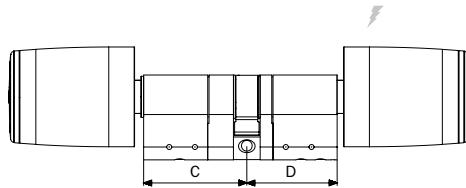

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:

- External diameter from 36 to 39 mm
- Length: 49 mm

"Premium" mechanical knob dimensions:

- External diameter from 36 to 39 mm
- Length: 49 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Warnings

Libra X Smart Half

MODULAR HALF KNOB CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEUETOOTH® KNOB (FREE-ROTATING)



 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:

- External diameter from 36 to 39 mm
- Length: 49 mm

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Warnings

Libra X Smart Double

MODULAR CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEUETOOTH® KNOB (FREE-ROTATING) AND INTERNAL ELECTRONIC KNOB (FREE-ROTATING)

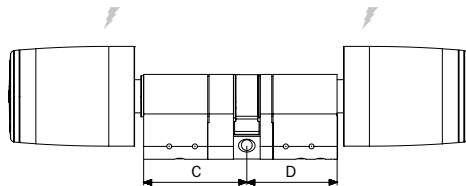

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 2 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

Code configurator

Accessories

DIMENSIONS

Electronic knob dimensions:
- External diameter from 36 to 39 mm
- Length: 49 mm

ONLINE CONTENT

Web page

Data sheet

Leaflet

User manual


Installation guide

Specifications

Warnings

Libra X Smart Removable reader and Extension plug 16 mm

MODULAR CYLINDER FOR ARMORED DOORS WITH EXTERNAL ELECTRONIC RFID/BLEUETOOTH[®] KNOB (FREE ROTATION), COMPATIBLE WITH CYLINDERS ESCUTCHEON, EXTENSION PLUG AND PRE-ARRANGED FOR INTERNAL KNOB SHAFT D 8X16 mm

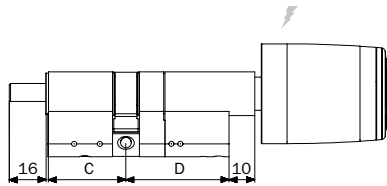

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:
- External diameter from 36 to 39 mm
- Length: 49 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Warnings

Libra X Smart Removable reader and Extension plug 75 mm

MODULAR CYLINDER FOR ARMORED DOORS WITH EXTERNAL ELECTRONIC RFID/BLEETOOTH® KNOB (FREE ROTATION), COMPATIBLE WITH CYLINDERS ESCUTCHEON, EXTENSION PLUG AND PRE-ARRANGED FOR INTERNAL KNOB SHAFT D 8X75 mm

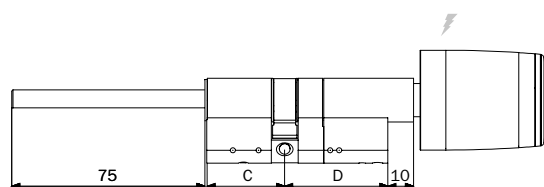

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

Code configurator

Accessories

DIMENSIONS

Electronic knob dimensions:
- External diameter from 36 to 39 mm
- Length: 49 mm

ONLINE CONTENT

Web page

Data sheet

Leaflet

User manual


Installation guide

Specifications

Warnings

Libra X Smart Dummy-knob

MODULAR CYLINDER FOR ARMORED DOORS WITH
EXTERNAL ELECTRONIC RFID/BLEETOOTH® KNOB
(FREE ROTATION) AND KNOB-DUMMY ON INTERNAL SIDE

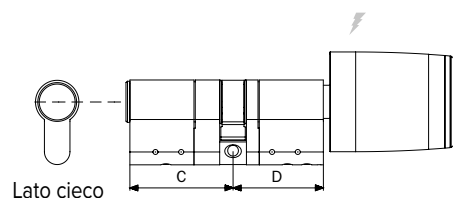

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:
- External diameter from 36 to 39 mm
- Length: 49 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Warnings

Libra X Smart Oval Australian

OVAL AUSTRALIAN ELECTRONIC CYLINDER WITH EXTERNAL RFID/BLEUETOOTH® ELECTRONIC KNOB (FREE ROTATION)



 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:

- External diameter from 36 to 39 mm
- Length: 49 mm

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

- Compatible with all the mechanical locks equipped with an Australian profile cylinder hole

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)

- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Warnings

Libra X Smart Oval Scandinavian

OVAL SCANDINAVIAN ELECTRONIC CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEUETOOTH® KNOB (FREE ROTATION)



 Code configurator

 Accessories

DIMENSIONS

Electronic knob dimensions:

- External diameter from 36 to 39 mm
- Length: 49 mm

Technical features

FIRMWARE
ARGO

POWER UNIT
13V lithium battery type CR123

ESTIMATED BATTERY LIFE
Up to 2 years, up to 20.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

ALERTS
- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY
- Compatible with all the mechanical locks equipped with a Scandinavian profile cylinder hole

MOUNTING
- On door

ENVIRONMENTAL FEATURES
- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE
-25°C / +65°C

STORAGE TEMPERATURE
-25°C / +65°C

PACKAGE
1 cylinder, 1 battery, cylinder fixing screws for internal door side versions, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)
- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)
- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual

 Installation guide

 Specifications

 Warnings

Libra X Smart

Accessories




PRE-ASSEMBLED MODULES (1/3)

EXTERNAL WITHOUT COVER.

Multistandard RFID reader (ISO14443A/ISO14443B 13,56 Mhz) on the outside.


IP protection degree IP66/IP67/IP68/IP69 for all versions. Available Heavy Duty version with drilling protection.

Packaging: 1 knob, 1 battery, fixing screw.



Electronic standard knob external side.


Nickel 1 8MX20K0009065



Electronic Heavy Duty knob external side removable


Nickel 1 8MX30K0009065

NOTE: to be coupled only with internal module for armoured door



Electronic Heavy Duty knob outer side.

Nickel 1 8MX10K0009065



Electronic Heavy Duty knob external side removable.

Nickel 1 8MX40K0009065

NOTE: to be coupled only with internal module for armoured door

Libra X Smart

Accessories




PRE-ASSEMBLED MODULE (2/3)

INTERNAL WITHOUT COVER.

Multistandard RFID reader (ISO14443A/ISO14443B 13,56 Mhz) on the inside.

IP protection degree IP66/IP67/IP68/IP69 for all versions.

Packaging: 1 knob, 1 battery, fixing screw.



Electronic knob inside 35 mm.

Nickel 1 8MX20K1009065


Libra X Smart

Accessories

PRE-ASSEMBLED MODULE (3/3)


INTERNAL WITHOUT KNOB.

Packaging: 1 module.



Shaft internal module 16 mm.


Nickel 1 8MX26K1009000

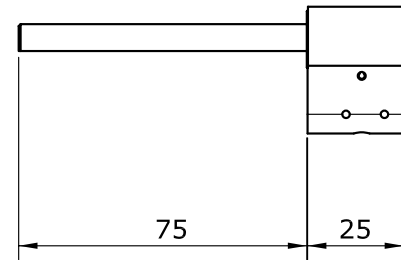

Shaft internal module 75 mm for armored door

Nickel 1 8MX3DK1009000


NOTE: to be coupled only with external module for armoured door



Shaft internal module 16 mm. For Panic.


Nickel 1 8MX26K1009000P

NOTE: to be coupled only with external module for armoured door



Module internal side for blind version: Libra LE60 Dummy Knob.


Nickel 1 8MX2CK1009000



Shaft internal module 16 mm for armoured door.

Nickel 1 8MX36K1009000

NOTE: to be coupled only with external module for armoured door



Module internal side for blind version: Libra LE60 Dummy Knob.


For Panic.

Nickel 1 8MX2CK1009000P

Libra X Smart


Accessories

MODULAR LIBRA X ASSEMBLED COMPONENTS




Kit 5 pcs. connecting bar for double cylinder.

3030 / 3035 / 3535	0033230
3040 / 3045 / 3540 / 3545	0033240
4040 / 4045 / 4545	0033250
3050 / 3055 / 3550 / 3555	0033260
3060 / 3065 / 3560 / 3565	0033270
4050 / 4055 / 4550 / 4555	0033280
5050 / 5055 / 5555	0033290
3070 / 3075 / 3570 / 3575	0033300
4060 / 4065 / 4560 / 4565	0033310
3080 / 3085 / 3580 / 3585	0033320
4070 / 4075 / 4570 / 4575	0033330
5060 / 5065 / 5560 / 5565	0033340
6060 / 6065 / 6565	0033350
3090 / 3095 / 3590 / 3595	0033360
4080 / 4085 / 4580 / 4585	0033370
5070 / 5075 / 5570 / 5575	0033380
4090 / 4095 / 4590 / 4595	0033390
5080 / 5085 / 5580 / 5585	0033400
6070 / 6075 / 6570 / 6575	0033410



Kit 5 pcs. connecting bar for single cylinder.

3010 / 3510	0033450
4010 / 4510	0033460
5010 / 5510	0033470
6010 / 6510	0033480
7010 / 7510	0033490
8010 / 8510	0033500
9010 / 9510	0033510



Kit 5 pcs. connecting bar for single cylinder.


removable external control

3510	0033936
4010	0033937
4510	0033938
5010	0033939
5510	0033940
6010	0033941
6510	0033942
7010	0033943
7510	0033944
8010	0033945
8510	0033946
9010	0033947

Libra X Smart

Accessories

MODULAR LIBRA X ASSEMBLED COMPONENTS




Universal connecting bar for standard version (8MX10*/8MX20* / 8MX18*/8MX28*/8MX1C*/8MX2C*)

Kit 2 pcs. 30÷60/30÷90	0033520
Kit 2 pcs. 30÷80/30÷180	0033552
Kit 2 pcs. 30÷130/30÷130	0033553


Universal connecting bar for special version

Kit 2 pcs. side with special function 35÷85 / 30÷90 standard side	0033935
Kit 2 pcs. side with special function 40÷90 / 30÷90 standard side	0033934
can only be cut every 10 mm	



Universal connecting bar, single profile cylinder (image given for illustrative purposes only).

Kit 2 pcs. 30÷90/10 stainless steel	0033530
Kit 2 pcs. 95÷180/10 stainless steel	0033551
Connecting bar 0033551 is drilled from 95 mm	



Extension for cylinder body.

Kit 5 pcs. body extension 5 mm	0034211
Kit 5 pcs. body extension 10 mm	0034212
Kit 5 pcs. body extension 15 mm	0034213
Kit 5 pcs. body extension 20 mm	0034214
Kit 5 pcs. body extension 40 mm	0034215




Extension for cylinder body.

Kit 5 pcs. body extension 5 mm	0033911
Kit 5 pcs. body extension 10 mm	0033912
Kit 5 pcs. body extension 15 mm	0033913
Kit 5 pcs. body extension 20 mm	0033914
Kit 5 pcs. body extension 40 mm	0033915
Kit 5 pcs. body extension 80 mm	0033916

Libra X Smart

Accessories

MODULAR LIBRA X ASSEMBLED COMPONENTS



Kit 100 pcs. steel fixing pins

0033740



Kit 100 pcs. connecting ring

0033917




Kit 100 pcs. 2 Set caps electronic modular cylinder Libra body

0033919




Kit 10 pcs. Cam plug for the cylinder Libra Modular mono

0033927



Kit 10 pcs. Cam. 0° for knob modular cylinder Libra stainless steel


0033918



1 pcs Cam BIFFAR modular cylinder Libra stainless steel

1


0033933



Cogwheel Z= 10 7,8 mm modular for cylinder Libra stainless steel

1

0033929



Cogwheel Z= 18 7,8 mm modular for cylinder Libra stainless steel


1

0033928

Libra X Smart


Accessories

ELECTRONIC KNOB SPARE PARTS




Libra X Rotors, without cover, without battery.

External rotor Libra X Standard	1	0034201
External rotor Libra X Heavy Duty	1	0034202
Internal rotor Libra X Double	1	0034203



BATTERY (compatible only with Libra X)

Lythium battery FDK CR17335EF 3V 1400 mAh	1	0033960
---	---	---------



KIT WITH COVER RETAINING RING AND GREASE


Recommended spare kit for replacing the cover retaining ring and lubricating the rubber O-ring.

Package contents: 5 retaining rings, 1 tube of grease.	1	0034216
--	---	---------

Libra X Smart

Accessories


“PREMIUM” KNOB COVER (RFID AND MECHANICAL VERSIONS)



“PREMIUM” KNOB COVER

Suitable both for RFID reader knob and “Premium” mechanical knob.

Inox - Matte White	2	0444624
Inox - Matte Black	2	0444625
Kit 5 pz Inox - Matte White	1	0444724
Kit 5 pz Inox - Matte Black	1	0444725



ADAPTER FOR MECHANICAL PREMIUM KNOB

It allows the usage of the Premium covers as mechanical inside knobs.

Package: 1 adaptor, 1 fixing screw.


	10	0444640
Kit 5 pcs	1	0444740

“STANDARD” MECHANICAL KNOB

“STANDARD” MECHANICAL KNOB

Internal mechanical knob.

Packaging: 1 knob, 1 battery, fixing screw.




Inox	10	044232
Kit 5 pcs Inox	1	044322

Libra X Smart


Accessories

ANTI-INTRUSION ACCESSORIES



ANTI-INTRUSION PROTECTION KIT
For Libra cylinder, for armoured doors.
Satin inox

1	044252
---	--------



ANTI-INTRUSION ESCUTCHEON KIT
For Libra cylinder, for armoured doors.

A= 13 mm, satin inox


1	044262
---	--------

A= 17 mm, satin inox

1	044272
---	--------

Libra X Smart

Accessories




LIBRA X KNOB ASSEMBLY/DISASSEMBLY TOOL

ASSEMBLY/DISASSEMBLY TOOLING KIT FOR ELECTRONIC KNOB COVER
Necessary for battery replacement.
Package: 1 tool, instruction sheet
PLEASE NOTE: tool set not included with the Libra X. To order separately.

1003140

ASSEMBLY TOOLING KIT FOR MODULAR CYLINDERS




INSTALLATION TOOL FOR MODULAR CYLINDER LE60
Tool necessary for the assembly of modular cylinders.
Package: installation tool, 2 blocking pins
NOTE: the cylinders are supplied WITHOUT this tool. ORDER SEPARATELY.

10033097



Pin driver tool on modular cylinder clamp

10033094



Libra X Smart


Accessories



PACKAGING DESIGN

Kit Libra X modular	1	0034207
Package: 1 cylinder 8MX2830302565 with 1 battery fixing screw, 2 mm hex key, instruction sheet + Cover disassembling tool 1 master card set 5E405309.3		

Smart Relay 2.0

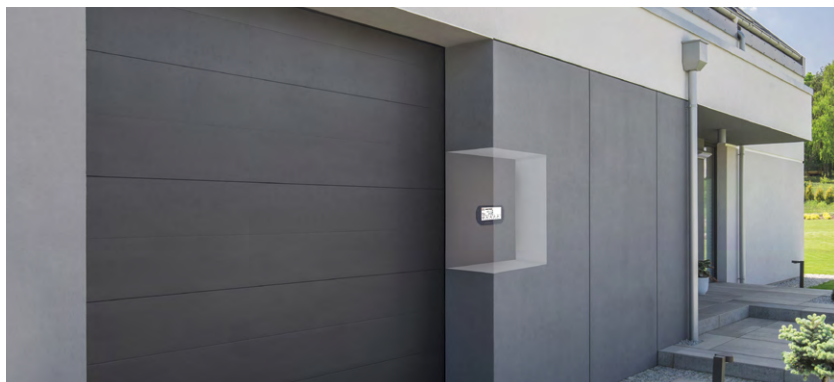

Make your access points smart

The Smart Relay allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.

Concealed installation

The Smart Relay device can have an integrated or external Bluetooth® antenna, in order to install the device even in unconventional installation spaces: the antenna can be installed in another point and connected to the device.

Product's functions

- REX (REquest to eXit) is an Opto-insulated input to open the relay with a button distant up to 100 meters.
- The OUTPUT relay is a signal relay (1A) and can be also configured as NO (default) or NC by a jumper under the cover enclosure. It can be configured with the ARGO App for different functions.
- Memorize up to 300 users credentials
- Records the last 1000 events
- Wake up by RFID card detection or phone Bluetooth® (patented)
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

Go to page

MODELS

- Built in Bluetooth® p. 76
- External Bluetooth® (max 3 meters) p. 77

ENVIRONMENTAL CHARACTERISTICS

- Max. 95% without condensing

CREDENTIALS

- Smartphone
- Apple Watch

COMMUNICATION INTERFACE

- Bluetooth® Low Energy 5.1

Smart Relay 2.0

Selection guide

Smart Relay controls electric locks, motorised gates or any electrical actuator that can be activated by closing a contact. The Smart Relay closes the relay contact when an authorized smartphone, previously registered on the device, sends an open command through the ARGO App. Smart Relay is available in two versions, which adapt to different installation requirements.


ORDER THE PRODUCT IN A FEW STEPS

1

Choose the appropriate template for your application and click in the column on the right :


Smart Relay with integrated Bluetooth® antenna

Device used for installations where there are no range problems of the Bluetooth® signal (approx. 10 m between smartphone and Smart Relay).

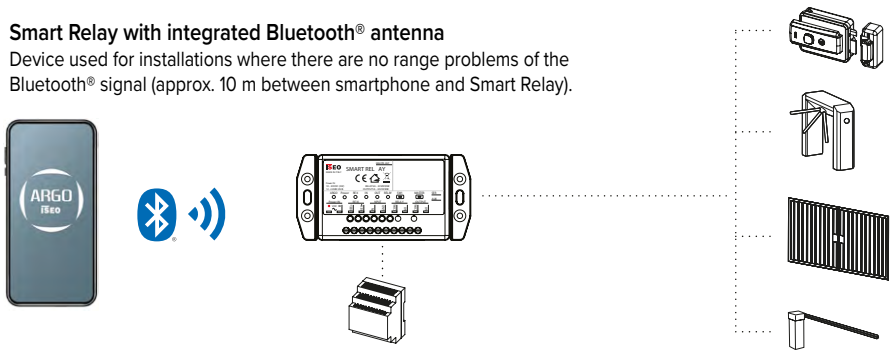

Smart Relay with external Bluetooth® antenna

To be used in case it is necessary to remote the Bluetooth® antenna from the installation of the Smart Relay. The length of the cable supplied for the external antenna is 3 m.

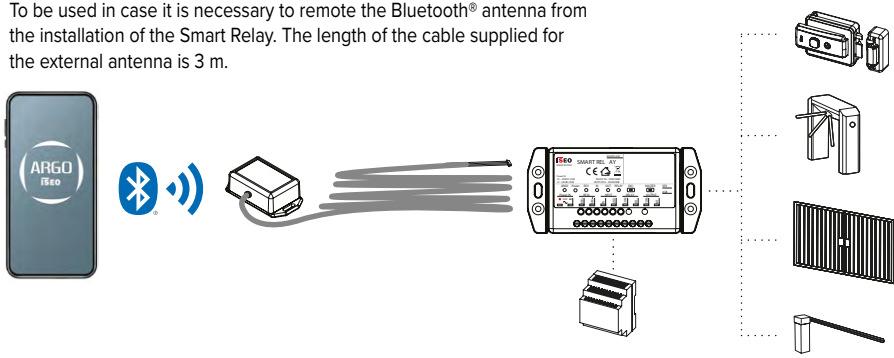

Go to page


SELECTION GUIDE

MODELS

- Built in Bluetooth® p. 76
- External Bluetooth® (max 3 meters) p. 77

Smart **Relay** 2.0 Built in Bluetooth®

CONNECTED ACTUATOR WITH BUILT IN BLUETOOTH®



Technical features

FIRMWARE
ARGO

RELEASE
2.0

POWER UNIT
10÷30 Vdc (2W)
12÷24 Vac (4VA)

MOUNTING
- Wall mounted
- Flush mounted
- DIN Rail 35 mounted

ENVIRONMENTAL FEATURES
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-25°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +70°C

PACKAGE
1 Smart Relay, 1 Plastic pin to setup Programming Mode,
1 DIN rail mounting clip
with screws, 1 Installation guide (EN/IT)

code **5E065501**

DIMENSIONS

- Width: 109 mm
- Height: 53 mm
- Thickness: 26 mm

ONLINE CONTENT

Web page

Data sheet

Leaflet

User manual

Installation guide

Specifications


Door entry system solution with Smart Relay and IS9100 automatic door operator

Door entry system solution with Smart Relay and electric gate

Door entry system solution with Smart Relay and Multiblindo Emotion.

Smart **Relay** 2.0 External Bluetooth® (max 3 meters)

CONNECTED ACTUATOR WITH EXTERNAL BLUETOOTH®

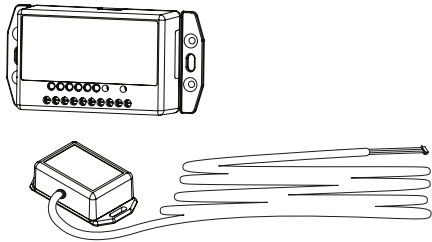

Technical features

FIRMWARE
ARGO

RELEASE
2.0

POWER UNIT
10÷30 Vdc (2W)
12÷24 Vac (4VA)

MOUNTING
- Wall mounted
- Flush mounted
- DIN Rail 35 mounted

ENVIRONMENTAL FEATURES
- H.R. max. 95% without condensing

WORKING TEMPERATURE
-25°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +70°C

PACKAGE
1 Smart Relay, 1 Plastic pin to setup Programming Mode, 1 DIN rail mounting clip with screws, 1 Bluetooth® remote module with 3 meters cable, 1 Installation guide (EN/IT)

code **5E065502**

DIMENSIONS

Smart Relay's dimensions:

- Width: 109 mm
- Height: 53 mm
- Depth: 26 mm

Bluetooth® Antenna's dimensions:

- Width: 65 mm
- Height: 35 mm
- Depth: 15 mm

ONLINE CONTENT

- Web page
- Data sheet
- Leaflet

- User manual
- Installation guide
- Specifications

- Door entry system solution with Smart Relay and IS9100 automatic door operator
- Door entry system solution with Smart Relay and electric gate
- Door entry system solution with Smart Relay and Multiblindo Emotion.

Multiblindo Smart



Choose the configuration that best suits your needs

The ISEO self-closing motorized lock is the perfect combination of comfort of use and safety in all situations. Multiblindo Smart has the possibility of choosing between different configurations, completely battery powered or mains powered, with or without backup battery, to be used in the event of an electrical blackout.

Open as you like

The installation of Multiblindo Smart locks is recommended to protect entrances of homes, offices, commercial spaces and bed & breakfasts. In combination with the new ones 1NCA Readers and using your smartphone, manage access to your spaces intuitively and secure, monitoring activities in real time and simplifying permission management. The sensors on board the lock guarantee constant monitoring of access and of the door status, visible on smartphones and tablets.

MATERIAL

Stainless steel

Product features

- Closing the leaf, the lock engages the deadbolts automatically
- Memorize up to 300 users credentials
- Records the last 1000 events
- Wake up by RFID card detection or phone (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Permanently open mode (office mode) without extra battery consumption
- Door Status option with cable with Relay Output to manage an automatic door operator or to be used for home automation systems
- Detection of opening by key, mechanical handle and external input (button)
- Door status and lock status monitoring
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

Go to page

CONFIGURATIONS

- Full battery p. 80
- Powered by 24Vdc with backup batteries p. 81
- Powered by 24Vdc p. 82

MODELS

- Multiblindo Smart p. 83

ACCESS CREDENTIALS

- Apple Watch
- Badge
- Bracelet
- Numeric Keypad
- Fingerprint
- Keyfob
- Smartphone

COMMUNICATION INTERFACE

- Check the communication interfaces of lock's compatible readers


CERTIFICATIONS

- EN 14846:2008 with the classification |3|X|9|E|0|P|7|1|3|
- EN 179: 2008 with the classification |3|7|7|B|1|4|5|2|3|
- EN 1125 certification available in combination with specific panic devices and locks

Multiblindo Smart

Selection guide

Multiblindo Smart features a modular design to suit various installation needs. This catalog allows you to select the desired configuration for the lock, define the necessary components, and check the connections.

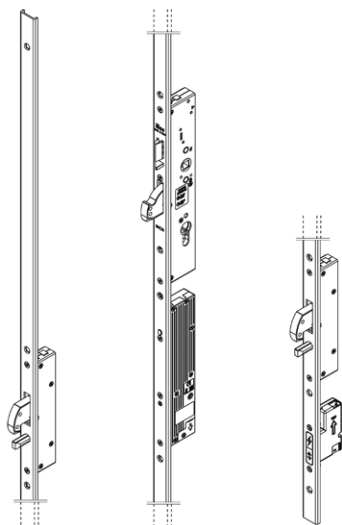

ORDER THE PRODUCT IN A FEW STEPS

1

Check **the type of application and the available installation spaces**, particularly assessing whether it is possible to run a power cable to the door.

3

Optional.
Refer to the accessory sheets for component modifications and replacements.

Choose from menu

Connection box

Connection cables

Batteries

Power supply unit

2

Choose **the desired configuration and lock model in the right column**, generating the code using the configurator on the product page.

4

Choose **the suitable 1NCA Smart** reader model for your application.

Note: Verify the compatibility of the reader with the desired Multiblindo Smart configuration.

Choose the 1NCA Smart reader

Go to page

SELECTION GUIDE

CONFIGURATIONS

- Full battery p. 80
- Powered by 24Vdc with backup batteries p. 81
- Powered by 24Vdc p. 82

MODELS

- Multiblindo Smart p. 83

Multiblindo Smart




Full battery

No wiring is required. The lock **operates only using alkaline batteries**.
There are two battery packs on the door (9 Alkaline AA batteries in total).
In this configuration, **1NCA Smart Readers Cable Free** can be used if needed. If no reader is paired, the lock can still be managed with the **ARGO smartphone app**.
It is not possible to install an output relay in this configuration to monitor the door status or manage a swing door operator.

Reader type




1NCA Smart
Cable Free



Installation guide
for the configuration



No Reader
The lock can be managed
using the ARGO App
from a smartphone.



Installation guide
for the configuration



You can choose the **1NCA Smart** reader model suitable for your application in the dedicated section of the catalog.

Note: Verify the compatibility of the reader with the desired Multiblindo Smart configuration.

Go to page

SELECTION GUIDE

CONFIGURATIONS

- Full battery p. 80
- Powered by 24Vdc with backup batteries p. 81
- Powered by 24Vdc p. 82

MODELS

- Multiblindo Smart p. 83

Multiblindo Smart




Powered by 24Vdc with backup batteries

The power supply is provided by an **external 24Vdc power** adapter connected to the electrical network, and there is a **backup battery pack (9 Alkaline AA)** on the door to keep the lock operational in case of power outage (blackout).
In this configuration, **1NCA Smart Cable Free** and **1NCA Smart Standard** can be used if required (you can choose the desired model in this catalog).
If no reader is paired, the lock can still be managed with the **ARGO App from a smartphone**.
Additionally, you can add an **output relay** to monitor the door status or manage an automatic door operator.

Reader type




1NCA Smart Standard



Installation guide
for the configuration
with output relay

[BKW+R]




Installation guide
for the configuration
without output relay

[BKW]




1NCA Smart Cable Free



Installation guide
for the configuration
with output relay

[BKF+R]




Installation guide
for the configuration
without output relay

[BKF]


No Reader

The lock can be managed
using the ARGO App from a
smartphone.



Installation guide
for the configuration
with output relay

[BKF+R]



Installation guide
for the configuration
without output relay

[BKF]

You can choose the **1NCA Smart reader model** suitable for your application in the dedicated section of the catalog.

Note: Verify the compatibility of the reader with the desired Multiblindo Smart configuration.

Go to page

SELECTION GUIDE

CONFIGURATIONS

- Full battery p. 80
- Powered by 24Vdc with backup batteries p. 81
- Powered by 24Vdc p. 82

MODELS

- Multiblindo Smart p. 83


Multiblindo Smart




Powered by 24Vdc

The power supply is provided by an external 24V power adapter connected to the electrical network.
In this configuration, **1NCA Smart Cable Free**, **1NCA Smart Standard** or **1NCA Smart Mullion 485** can be used if required (you can choose the desired model in this catalog). If no reader is paired, the lock can still be managed with the **ARGO App** from a smartphone.
Additionally, you can add an **output relay** to monitor the door status or manage an automatic door operator.


Reader type



1NCA Smart Standard
1NCA Smart Mullion 485




Installation guide
for the configuration
with output relay
 [PWW+R]




Installation guide
for the configuration
without output relay
 [PWW]



1NCA Smart Cable Free




Installation guide
for the configuration
with output relay
 [PWF+R]




Installation guide
for the configuration
without output relay
 [PWF]

No Reader
The lock can be managed
using the **ARGO App** from a
smartphone.



Installation guide
for the configuration
with output relay
 [PWF +R]



Installation guide
for the configuration
without output relay
 [PWF]

You can choose the **1NCA Smart reader model** suitable for your application in the dedicated section of the catalog.

Note: Verify the compatibility of the reader with the desired Multiblindo Smart configuration.

Go to page

SELECTION GUIDE

CONFIGURATIONS


- Full battery p. 80
- Powered by 24Vdc with backup batteries p. 81
- Powered by 24Vdc p. 82

MODELS

- Multiblindo Smart p. 83

Multiblindo Smart

MOTORIZED SELF-LOCKING MULTI-POINT LOCK, WITH A HIGH LEVEL OF SECURITY, SUITABLE FOR METAL FRAME DOORS MULTIPLE LOCKING POINTS, TO BE COMBINED WITH CONNECTION BOX

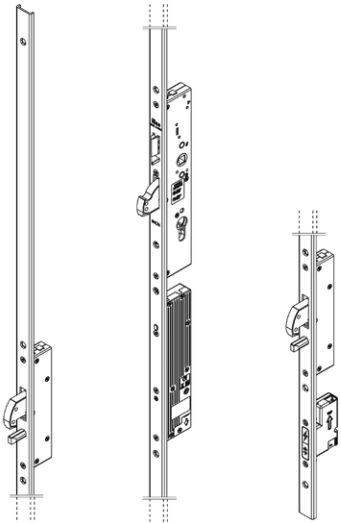

Technical features

FIRMWARE ARGO

POWER UNIT

Configurable power:

- 24Vdc mains power supply
- 24Vdc mains power supply and backup battery on the door (which guarantees the use of the access even if the main power supply is interrupted)
- Battery powered (no cable needed for main power)

ESTIMATED BATTERY LIFE

Up to 2 years, up to 10.000 opening. The figure is dependent on the mode and environment of use and the options activated.

HARDWARE SPECIFICATIONS

- Electromechanical 24vdc multipoint mortice lock for metal frames, self-locking latchbolt and 3 deadbolts, rotating hook deviators and pin. Deadbolts and latchbolt operated by key, handle or motor. Lock and deviators deadbolts with anti-drill and anti-cut cover plates in hardened steel. Adapter for 8 mm square handle, 2 nylon end blocks for U-version

ALERTS

- Multi-frequency buzzer

PRODUCT COMPATIBILITY

- The addition of the 1NCA Smart Cable Free or 1NCA Smart Standard readers allows entry with different electronic credentials, configuration, validity and times. Up to 300 credentials in total can be combined with the lock

- For metal frame doors with multiple locking points
- European profile cylinder

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- H.R. max. 95% without condensing

WORKING TEMPERATURE

-20°C ÷ +70°C

STORAGE TEMPERATURE

-20°C ÷ +70°C

PACKAGE

1 Multipoint lock L 2300 mm, Door status magnet, lock fixing screws, installation manual.

ACCESSORIES (NOT INCLUDED)

- Connection Box (see operating and power configurations)
- Motor/Connection Box cable (see operating configurations)
- Flexible cable for rim and mortice mounting
- Battery pack
- Batteries
- Counterplates
- Magnet holder
- Emergency handle or panic bar
- Emergency mechanical cylinder
- Extensions

 Code configurator

 Accessories

DIMENSIONS

Lock length 2300 mm, center distance 92 mm

Lock and deviators deadbolts 27 mm throw

Connection cable length 6 m (not included)

ONLINE CONTENT

 Web page

 User manual

 Data sheet

 Installation guide




 Leaflet

 Specifications

Multiblindo Smart

Accessories

CONNECTION BOX

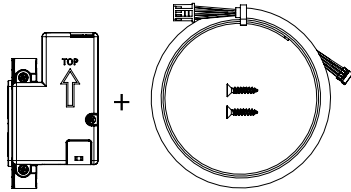


CONNECTION BOX FOR EXTERNAL 24VDC POWER SUPPLY, WITH BLUETOOTH®

Used in Multiblindo Smart configurations Powered by 24Vdc with Cable Free reader (PWF) and Powered by 24Vdc with Cable Free reader and output relay (PWF+R).

Package: 1 Connection Box, 1 cable, instruction manual.

1

7A0E110




CONNECTION BOX FOR EXTERNAL WIRED POWER SUPPLY, WITHOUT BLUETOOTH®

Used in Multiblindo Smart configurations Powered by 24Vdc with wired reader (PWW) and Powered by 24Vdc with wired reader and output relay (PWW+R).

Package: 1 Connection Box, 1 cable, instruction manual.

1

7A0E120




CONNECTION BOX FOR CONFIGURATION WITH BACKUP BATTERIES, WITH BLUETOOTH®

Used in Multiblindo Smart configurations Powered by 24Vdc with backup batteries and Cable Free reader (BKF), Powered by 24Vdc with backup batteries, Cable Free reader and Relay (BKF+R) and Full Battery (FB), version without external 24Vdc power supply.

Package: 1 Connection Box, 1 cable, instruction manual.

1

7A0E130



CONNECTION BOX FOR CONFIGURATION WITH BACKUP BATTERIES, WITHOUT BLUETOOTH®

Used in Multiblindo Smart configurations Powered by 24Vdc with backup batteries and wired reader (BKW) and Powered by 24Vdc with backup batteries, wired reader and output relay (BKW+R).

Package: 1 Connection Box, 1 cable, instruction manual.


1

7A0E140

Multiblindo Smart

Accessories

CONNECTION CABLES AND BATTERIES




6-WIRE CONNECTION CABLE FOR MULTIBLINDO SMART

Used in Multiblindo Smart configurations Powered by 24Vdc with wired reader (PWW) and Powered by 24Vdc with backup batteries with wired reader (BKW).

Package: 1 Connection Cable

1

7A0E200




4-WIRE CONNECTION CABLE FOR MULTIBLINDO SMART

Used in Multiblindo Smart configurations Powered by 24Vdc with Cable Free reader (PWF) and Powered by 24Vdc with backup batteries with Cable Free reader (BKF).

Package: 1 Connection Cable

1

7A0E210




6-WIRE CONNECTION CABLE FOR MULTIBLINDO SMART

Used in Multiblindo Smart configurations Powered by 24Vdc with Cable Free reader and output relay (PWF+R) and Powered by 24Vdc with backup batteries, Cable Free reader and output relay (BKF+R)

Package: 1 Connection Cable

1

7A0E220




8-WIRE CONNECTION CABLE FOR MULTIBLINDO SMART

Used in Multiblindo Smart configurations Powered by 24Vdc with wired reader and output relay (PWF+R) and Powered by 24Vdc with backup batteries, wired reader and output relay (BKF+R)

Package: 1 Connection Cable

1

7A0E230




SINGLE BATTERY HOLDER + CONNECTION CABLE

Single battery holder in black nylon for 9 type AA batteries. Compatible with Multiblindo Smart, supplied with connection cable. (batteries not provided).

Package: 1 Battery holder, 1 connection cable

1

7A0E300



DOUBLE BATTERY HOLDER + CONNECTION CABLES

Double battery holder in black nylon for 9x2 type AA batteries. Compatible with Multiblindo Smart, supplied with connection cables. (batteries not provided).

Package: 2 Battery holder, 2 connection cables

1

7A0E310

PACKAGE 9 BATTERIES


Duracell Procell AA alkaline battery

1

7A0E320

Multiblindo Smart

Accessories



POWER SUPPLY UNIT 24VDC - 70W

Input 120-230Vac. Output 24Vdc 3A.
DIN35 rail mounting.

Package: 1 Power Supply, instruction manual


1 5E3502



FLEXIBLE CABLE FOR RIM MOUNTING, EXTERNAL

Length 300 mm, for opening up to 180°


1 94403010E



FLEXIBLE CABLE FOR RIM MOUNTING, EXTERNAL

Length 290 mm, for opening up to 90°

1 94403110E




STAINLESS STEEL PLATE FOR MAGNET HOLDER

with flat front plate - dimensions 24X3 mm

1 033103

with U-shaped front plate - dimensions 24X6 mm

1 033104



DOOR ALIGNMENT SENSOR – SPARE PART

Door status contact sensor to be installed in the strike plate of Multiblindo Smart.

Spare part, as it is already included in the lock package.

Supplied complete with support bracket and fixing screws.

1 0000IS00366

X1R Smart 2.0



Control for security doors

X1R Smart is a motorised electronic lock specifically designed for security doors. It combines the solidity of a mechanical lock with the versatility of electronic control via smartphone, RFID tag or keypad.

Choose your preferred credential

The security doors equipped with X1R Smart lock offer to the user the possibility of accessing with the ARGO App from a Smartphone and with RFID devices. It is also possible to have a numeric keypad and fingerprint reader on the door, to allow access to the user without having to use any physical credentials.

Product's functions

- Opening via PIN code and finger print.
- Motorised opening and closing of deadbolts and latchbolt.
- Quick opening from inside the room with "Single Action" handle (optional).
- Opening via European profile cylinder (EN 1303, DIN 18252).
- Light function (latch only) programmable by the user for certain days and time slots.
- Memorize up to 300 users credentials
- Records the last 1000 events
- Battery-operated device with charge status detection
- Wake up by RFID card detection or phone Bluetooth® (patented)
- Low energy consumption device
- Real Time Clock/Calendar
- Light and acoustic signals
- Permanently open mode (office mode) without no extra battery consumption
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by ARGO App on iOS and Android devices

ENVIRONMENTAL CHARACTERISTICS

- IP44

CREDENTIALS

- Apple Watch
- Badge
- Bracelet
- Numeric Keypad
- Fingerprint
- Keyfob
- Smartphone

COMMUNICATION INTERFACE

- Check the communication interfaces of X1R-compatible readers

CERTIFICATIONS

- EN 14846:2008 with the classification I3|X|9|E|0|P|7|1|3|

Go to page

MODELS

- Rim version p. 89
- Rim version Single Action with quick release via the handle p. 90
- Mortice version p. 91
- Mortice version Single Action with quick release via the handle p. 92
- Panic 4RM Motorized and anti-panic lock for armoured doors - Rim version p. 93

X1R Smart 2.0

Selection guide

X1R Smart is a motorised electronic lock specially designed for application on armoured doors. It combines the robustness of a mechanical lock with the versatility of electronic control via Smartphone, RFID tag or keypad.

ORDER THE PRODUCT IN A FEW STEPS

1

Check the type and dimensions of the X1R Smart lock.

2

Choose the model of the X1R Smart in the column on the right.

3

Choose the **control module** and **accessories** **best** suited to your needs.

4

Optional.
Choose accessories to complete the system.

Choose from menu

Control modules

Other accessories

Go to page


SELECTION GUIDE

MODELS

- Rim version p. 89
- Rim version Single Action with quick release via the handle p. 90
- Mortice version p. 91
- Mortice version Single Action with quick release via the handle p. 92
- Panic 4RM Motorized and anti-panic lock for armoured doors - Rim version p. 93


X1R Smart 2.0 Rim version

MOTORISED ELECTRONIC LOCK SPECIFICALLY DESIGNED FOR SECURITY DOORS, RIM VERSION

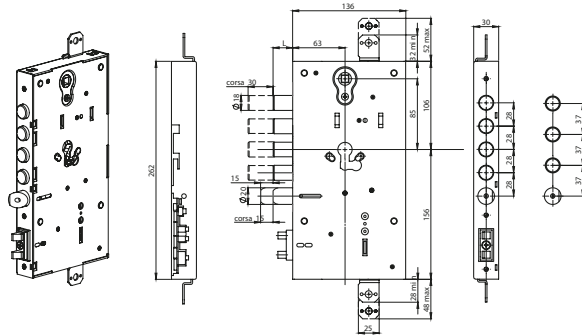

Click on the product code to download the right datasheet

4 DEADBOLTS. Projection 3. Centre distance 28	0006960328550
4 DEADBOLTS. Projection 13. Centre distance 28	0006961328550
3 DEADBOLTS. Projection 3. Centre distance 37	0006960337550
3 DEADBOLTS. Projection 13. Centre distance 37	0006961337550



Accessories

DIMENSIONS

Deadbolts in chrome-plated steel $\varnothing$ 18 mm, projection 30 mm
Reversible latchbolt $\varnothing$ 20 mm, adjustable projection
Handle follower 8 mm for latchbolt operation

Technical features

FIRMWARE
ARGO

RELEASE
2.0

POWER UNIT
Battery operated with 6 1.5 VDC alkaline batteries
Power supply from 8 to 30 VDC 30W
Consumption at rest 0.05A – Maximum (forced) 2.5A

ESTIMATED BATTERY LIFE
Up to 3 years, up to 30.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

PRODUCT COMPATIBILITY

- Top and bottom attachments for rods for additional closures
- Set up for M6 passing screws for cylinder protection fixing
- Reversible door sensor with adjustable projection, including alignment device
- Rim fixing with 4 passing screws or screw nuts
- Inox version on request

MOUNTING
- On armored door

ENVIRONMENTAL FEATURES
- IP44

WORKING TEMPERATURE
-20°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
Lock, door sensor, cylinder fixing screws, assembly instructions

ACCESSORIES (NOT INCLUDED)

- Smart Readers for X1R
- Power supply
- Concealed lead cover

ONLINE CONTENT


-  Web page
-  Data sheet
-  Leaflet

-  User manual
-  Installation guide
-  Specifications

-  Door entry system solution with X1R Smart lock and IS9100 automatic door operator.

X1R Smart 2.0 Mortice version

MOTORISED ELECTRONIC LOCK SPECIFICALLY DESIGNED FOR SECURITY DOORS, MORTICE VERSION

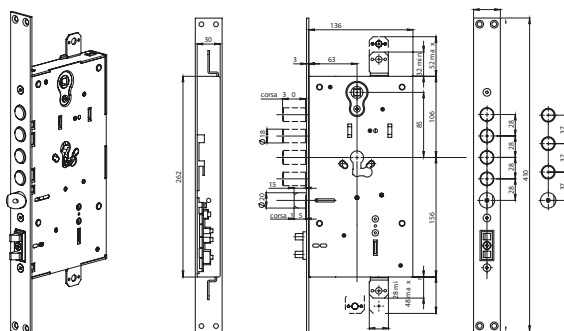

Click on the product code to download the right datasheet

4 DEADBOLTS. Centre distance 28 **0006960028550**

3 DEADBOLTS. Centre distance 37 **0006960037550**



DIMENSIONS

Deadbolts in chrome-plated steel $\varnothing$ 18 mm, projection 30 mm
Reversible latch $\varnothing$ 20 mm, adjustable projection
Handle follower 8 mm for latchbolt operation

Technical features

FIRMWARE
ARGO

RELEASE
2.0

POWER UNIT
Battery operated with 6 1.5 VDC alkaline batteries
Power supply from 8 to 30 VDC 30W
Consumption at rest 0.05A – Maximum (forced) 2.5A

ESTIMATED BATTERY LIFE
Up to 3 years, up to 30.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

PRODUCT COMPATIBILITY

- Top and bottom attachments for rods for additional closures
- Set up for M6 passing screws for cylinder protection fixing
- Reversible door sensor with adjustable projection, including alignment device
- Mortice fixing with front plate in chrome-plated steel 410x35x3 mm
- Inox version on request

MOUNTING
- On armored door

ENVIRONMENTAL FEATURES
- IP44

WORKING TEMPERATURE
-20°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
Lock, door sensor, cylinder fixing screws, assembly instructions.

ACCESSORIES (NOT INCLUDED)

- Smart Readers for X1R
- Power supply
- Concealed lead cover

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual


 Installation guide

 Specifications

 Door entry system solution with X1R Smart lock and IS9100 automatic door operator.

X1R Smart 2.0 Mortice version Single Action with quick release via the handle

**MOTORISED ELECTRONIC LOCK SPECIFICALLY
DESIGNED FOR SECURITY DOORS,
MORTICE VERSION SINGLE ACTION**

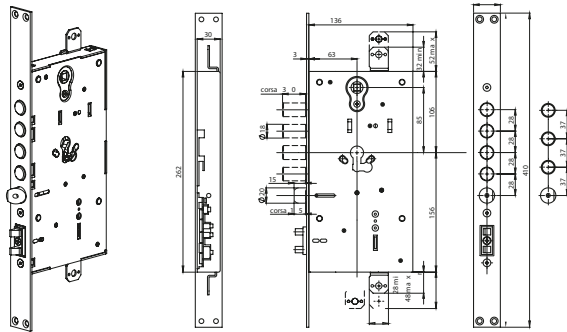

Click on the product code to download the right datasheet

4 DEADBOLTS. Centre distance 28	0006990028550
3 DEADBOLTS. Centre distance 37	0006990037550



DIMENSIONS

Deadbolts in chrome-plated steel $\varnothing$ 18 mm, projection 30 mm
Reversible latch $\varnothing$ 20 mm, adjustable projection
Handle follower 8 mm for latchbolt operation

Technical features

FIRMWARE
ARGO

RELEASE
2.0

POWER UNIT
Battery operated with 6 1.5 VDC alkaline batteries
Power supply from 8 to 30 VDC 30W
Consumption at rest 0.05A – Maximum (forced) 2.5A

ESTIMATED BATTERY LIFE
Up to 3 years, up to 30.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

PRODUCT COMPATIBILITY

- Top and bottom attachments for rods for additional closures
- Set up for M6 passing screws for cylinder protection fixing
- Reversible door sensor with adjustable projection, including alignment device
- Mortice fixing with front plate in chrome-plated steel 410x35x3 mm
- Inox version on request

MOUNTING
- On armored door

ENVIRONMENTAL FEATURES
- IP44

WORKING TEMPERATURE
-20°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
Lock, door sensor, cylinder fixing screws, assembly instructions.

ACCESSORIES (NOT INCLUDED)

- Smart Readers for X1R
- Power supply
- Concealed lead cover

ONLINE CONTENT


- Web page
- Data sheet
- Leaflet

- User manual
- Installation guide
- Specifications

- Door entry system solution with X1R Smart lock and IS9100 automatic door operator.

X1R Smart 2.0 Panic 4RM Motorized and anti-panic lock for armoured doors - Rim version

**MOTORISED ELECTRONIC LOCK SPECIFICALLY
DESIGNED FOR SECURITY DOORS WITH ANTI-PANIC
OR EMERGENCY FUNCTION, RIM VERSION**

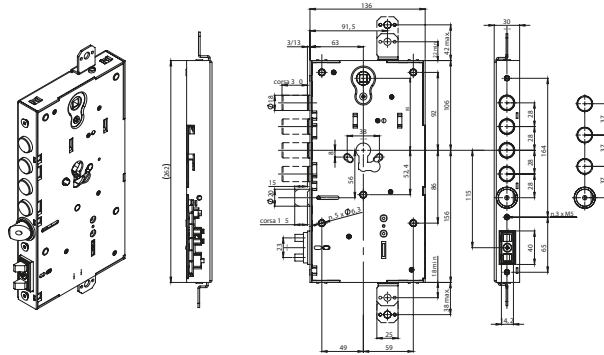

Click on the product code to download the right datasheet

4 DEADBOLTS, protrusion 3,
centre distances 28 **00069H0328550**

4 DEADBOLTS, protrusion 13,
centre distances 28 **00069H1328550**

3 DEADBOLTS, protrusion 3,
centre distances 37 **00069H0337550**

3 DEADBOLTS, protrusion 13,
centre distances 37 **00069H1337550**



DIMENSIONS

Deadbolt in chromed steel $\varnothing$ 18 mm, stroke 30 mm
Reversible latch $\varnothing$ 20 mm, adjustable protrusion
Square spindle 8 mm

Technical features

FIRMWARE
ARGO

RELEASE
2.0

POWER UNIT
Battery operated with 6 1.5 VDC alkaline batteries
Power supply from 8 to 30 VDC 30W
Consumption at rest 0.05A – Maximum (forced) 2.5A

ESTIMATED BATTERY LIFE
Up to 3 years, up to 30.000 opening.
The figure is dependent on the mode and environment of use and the options activated.

PRODUCT COMPATIBILITY
- Top and bottom attachments for rods for additional closures
- Set up for M6 passing screws for cylinder protection fixing
- Reversible door sensor with adjustable projection, including alignment device
- Suitable for fire-resistant doors

MOUNTING
- On armored door

ENVIRONMENTAL FEATURES
- IP44

WORKING TEMPERATURE
-20°C ÷ +70°C

STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
Lock, leaf approach contact, strike plate, cylinder fixing screws, instructions

ACCESSORIES (NOT INCLUDED)
- Smart Readers for X1R
- Power supply
- Concealed lead cover

ONLINE CONTENT


-  Web page
-  Data sheet
-  Leaflet

-  User manual
-  Installation guide
-  Specifications

X1R Smart 2.0

Accessories

CONTROL MODULES (1/3)



MULTI-READER

Compatible with X1R Smart.

Includes black cover and 3 connection cables L 1 mt.

Numeric keyboard, RFID reader 13,56 Mhz, Bluetooth®

"Wake on Hand" technology. Encrypted data communication protocol.

1

0000098108696



MULTI-READER WITH FINGERPRINT

Compatible with X1R Smart.

Includes black cover and 3 connection cables L 1 mt.

Numeric keyboard, RFID reader 13,56 Mhz, biometric reader, Bluetooth®

"Wake on Hand" technology. Encrypted data communication protocol.

1

0000098109696



EXTERNAL CONTROL MODULE WITH RFID READER 13.56 Mhz e Bluetooth®.

Compatible with X1R Smart, includes pair of connection cables L 100 cm.

Encrypted data communication protocol.

1

0000098105696



EXTERNAL CONTROL MODULE WITH KEYBOARD,


RFID READER 13,56 Mhz e Bluetooth®.

compatible with X1R Smart includes pair of connection cables L 100 cm

Encrypted data communication protocol.

1

0000098111696



HIDDEN RFID READER and Bluetooth®. Compatible with X1R Smart.

Includes pair of connection cables L 100 cm


1

0000098106696

X1R Smart 2.0

Accessories

CONTROL MODULES (2/3)




SQUARE INTERNAL CONTROL MODULE WITH 2 BUTTONS
Compatible with X1R Smart, includes connection cable L 60 cm.
Encrypted data communication protocol.

1 0000098PI2696




2-BUTTON INTERNAL CONTROL MODULE
Compatible with X1R Smart, includes connection cable L 60 cm.
Encrypted data communication protocol.

1 0000098PI0696




METAL BOX FOR HIDDEN READER
Measure: 104 x 32 x 104 mm (L x W x H)

1 0000098NBM696



EMBEDDED FLUSH FINGERPRINT READER
Compatible with X1R Smart. Includes pair of connection cables L 100 cm
Encrypted data communication protocol.
Required thickness inside the door 26 mm.

1 5E62100




EMBEDDED PROTRUDING FINGERPRINT READER
Compatible with X1R Smart. Includes pair of connection cables L 100 cm
Encrypted data communication protocol.
Required thickness inside the door 19 mm.

1 5E63100

X1R Smart 2.0


Accessories

CONTROL MODULES (3/3)




SURFACE MOUNTED FINGERPRINT READER
Compatible with X1R Smart. Includes pair of connection cables L 100 cm
Encrypted data communication protocol.
Required thickness inside the door 15 mm.

1 5E62200




IP66 SURFACE MOUNTED FINGERPRINT READER
Compatible with X1R Smart with embedded cable and IP66 connector.
Encrypted data communication protocol.
Required thickness inside the door 15 mm.

1 5E62220



IP66 CABLE FOR FINGERPRINT READER L 1.2 mt.
Connection cable between IP66 surface mounted fingerprint reader and X1R Smart

1 0000IS00246




IP66 CABLE FOR FINGERPRINT READER L 10 mt.
Connection cable between IP66 surface mounted fingerprint reader and X1R Smart

1 0000IS00247

X1R Smart 2.0


Accessories



POWER SUPPLY UNIT 24Vdc - 30W
Input 120-230Vac. Output 24Vdc 1.2A.
DIN35 rail mounting.

Package: 1 power supply unit, instruction manual.


1 5E3506



POWER SUPPLY UNIT 12Vdc - 70W
Input 120-230Vac. Output 12Vdc 3A.
DIN35 rail mounting.

Package: 1 power supply unit, instruction manual.

1 5E3509



POWER SUPPLY UNIT 9V DC - 4 A for direct power.
Compatible with X1R Smart. Connection cable to X1R Smart NOT INCLUDED,
to be ordered separately by code 0000098MP0696
(8-POLE MULTIFUNCTION CONNECTION CABLE)

1 5E3507




CONCEALED LEAD COVER, flexible, external, L=300.
For openings up to 180°.

1 94403010E


CONCEALER LEAD COVER external, flush version L=300

1 94403110E



CONCELEAD LEAD COVER, flexible, flush version L=260.
For openings up to 90°.
Compatible con Thesis, Top Exit DGT, X1R.

1 00000881000000




SPRING CONCELEAD LEAD COVER, flexible L=68.
For openings up to 180°.

1 0000060130000

X1R Smart 2.0

Accessories




BATTERY HOLDER in black nylon for 6 D-type batteries
Compatible with X1R Smart supplied with bipolar connection
cable L 240 cm. (batteries not provided).

black	1	5820069600005
grey	1	5820069600015
white	1	5820069600025




6 D-TYPE BATTERIES 1.5V
ALKALINE

1	5820060000006
---	---------------




BIPOLAR CONNECTION CABLE FOR REMOTE CONTROL
L 450 cm compatible with X1R Smart.

1	0000098CR0696
---	---------------



8-POLE MULTIFUNCTION CONNECTION CABLE L 450 CM FOR REMOTE CONTROL,
DOOR STATUS, DIRECT POWER AND LOCKBUS COMMUNICATION
Compatible with X1R Smart.

1	0000098MP0696
---	---------------




ADJUSTABLE DOOR CONTACT KIT FOR REMOTE CONTROL
Includes bipolar connection cable L 200 cm and door contact.
Compatible with X1R Smart.

1	0000098MO2170
---	---------------


X1R Smart 2.0

Accessories



Universal single escutcheons made of a nylon base,
brass cover and fixing screw.
Compatible with: *98PI0698, *98TE0698 e *98PE0698.

bronze plated	1	0000098N0XBRO
polished chrome	1	0000098N0XCRL
satın chrome	1	0000098N0XCRS
polished brass varnished	1	0000098N0XOLV
bronze plated	10	0000098N1DBRO
polished chrome	10	0000098N1DCRL
satın chrome	10	0000098N1DCRS
polished brass varnished	10	0000098N1DOLV




Universal rectangular single escutcheons made of a nylon base,
brass cover and fixing screw.
Compatible with: all readers and round inserts code *98PI0698, *98TE0698 e *98PE0698.

bronze plated	1	0000098N2XBRO
polished chrome	1	0000098N2XCRL
satın chrome	1	0000098N2XCRS
polished brass varnished	1	0000098N2XOLV
bronze plated	10	0000098N2DBRO
polished chrome	10	0000098N2DCRL
satın chrome	10	0000098N2DCRS
polished brass varnished	10	0000098N2DOLV

X1R Smart 2.0


Accessories



Cover for EMBEDDED FLUSH FINGERPRINT READER

Compatible with: 5E62100


polished black	1	5E621105
satin chrome	1	5E62110Y
polished brass	1	5E62110L



Cover for EMBEDDED PROTRUDING FINGERPRINT READER

Compatible with: 5E63100


polished black	1	5E631105
satin chrome	1	5E63110Y
polished brass	1	5E63110L



Cover for SURFACE MOUNTED FINGERPRINT READER

Compatible with: 5E62200

polished black	1	5E622105
satin chrome	1	5E62210Y
polished brass	1	5E62210L




Square cover for 2-button internal control module.

Only compatible square 2-button internal control module code 000008PI2696

polished black	1	0000098CPI005
satin chrome	1	0000098CPI00Y
polished brass	1	0000098CPI00L
bronze	1	0000098CPI00B

Door Controller Smart

Go to page

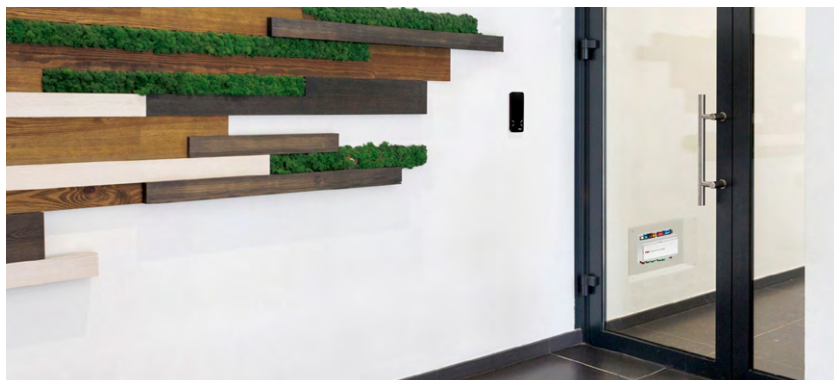

Complete control of an electrified access point

The Door Controller Smart enables access control for a single electrified lock through a dedicated relay for the door lock, making it suitable for a wide range of applications.

Easy to install, ready to use

The Door Controller Smart is designed for quick and easy installation. For proper operation, it is sufficient to connect it to a 1NCA Standard or 1NCA Mullion 485 reader via a wired RS485 connection. Configuration is fast and intuitive: no specific programming is required, as the controller automatically recognises the connected reader.

Product's functions

- Allows the opening of electric doors, motorised gates, or any electrical actuator that can be activated by closing a contact.
- Door status sensor detects whether the door is open or closed, providing precise and constant door status monitoring.
- REX (REquest to eXit) is an opto-isolated input that allows relay activation via an exit button located up to 100 m away.
- Real Time Clock / Calendar.
- Manages one 1NCA Reader for access control.

MATERIAL

Technopolymer

COLOUR

White

COMMUNICATION INTERFACE

- RS485

CERTIFICATIONS

- Compliance with European and UK EMC directives
- EN IEC 61000-6-3: Electromagnetic Compatibility (EMC)
- EN IEC 61000-6-1: Electromagnetic Compatibility (EMC)
- EN IEC 62368-1: Audio/video, information and communication technology


MODELS

→ Door Controller Smart

p. 102

Door Controller Smart

ACCESS CONTROL UNIT FOR A SINGLE ELECTRIFIED LOCK VIA A DEDICATED RELAY, WITH DOOR STATUS MONITORING, CONNECTABLE TO 1 READER VIA RS485 CABLE.

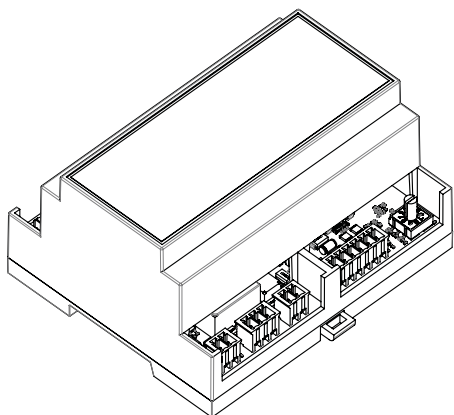

code **5E2515**

DIMENSIONS

- Height: 90 mm
- Depth: 58 mm
- Width: 106 mm (6 DIN modules)

Technical features

FIRMWARE
ARGO

POWER SUPPLY
12÷24 Vac (max. 15W)

HARDWARE FEATURES

- **INPUTS:**
 - REX Open Command (Request to Exit): internal opening command
 - Door Contact: door sensor indicating whether the door is open or closed
 - AUX Input Contact (RFU*)
 - Tamper (RFU*)
- **OUTPUTS:**
 - Door Lock RELAY (COM NO NC): supports both fail-safe and fail-secure locking devices
 - Booster: enables the operation of an electric lock with solenoid; activated in parallel with the Door Lock
 - RELAY
 - AUX RELAY (RFU*)

*RFU = Reserved for Future Use

PRODUCT COMPATIBILITY

- For proper operation, the Smart Door Controller must always be equipped with either a 1NCA Smart Standard reader or a 1NCA Smart Mullion 485 reader
- The device supports 1 reader

MOUNTING

- DIN35 rail mounting

OPERATING TEMPERATURE

-20°C ÷ +60°C

STORAGE TEMPERATURE

-20°C ÷ +70°C

PACKAGE CONTENTS

- 1 Smart Door Controller
- 1 Connector Kit
- 1 Installation Guide

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet

 User manual

 Installation guide

 Specifications

Smart Gateway



Control the system remotely

With Smart Gateway, the ARGO system by ISEO can be controlled remotely, in residential but also in 'light' commercial environments, such as shops, small offices, B&Bs, where the new smart devices generation for door locks it can simplify your daily life and make logistics easier.

Connection security

The ARGO 3.0 system guarantees a secure connection thanks to Bluetooth® Low Energy 5.1 and end-to-end encryption, which manages communication without an intermediate server.

Product's functions

- "Desktop" format with the possibility of wall mounting
- Data conversion (WIFI or Ethernet) to Bluetooth® Low Energy 5.1

COLOR

 White

COMMUNICATION INTERFACE

- Conversion from WIFI data to Bluetooth®
- Dual Band WIFI at 2.4 GHz and 5 GHz
- USB type C

[Go to page](#)

MODELS

- [WIFI](#) [p. 105](#)
- [Power over Ethernet](#) [p. 106](#)

Smart Gateway

Selection guide

Smart Gateway connects the cloud platform (ARGO account of ISEO) to the door lock. The device communicates with the cloud via the data connection and to the door lock via Bluetooth® Low Energy 5.1. Smart Gateway can manage all door locks within the Bluetooth® operating radius (approx. 10 metres, depending on environmental conditions). The Smart Gateway is available in two versions to adapt to different installation requirements.


ORDER THE PRODUCT IN A FEW STEPS

1

Choose the appropriate template for your application and click in the column on the right :


WiFi Smart Gateway

Device used for installations where it is preferred to use the WiFi network to connect the system to the Internet (residential market).

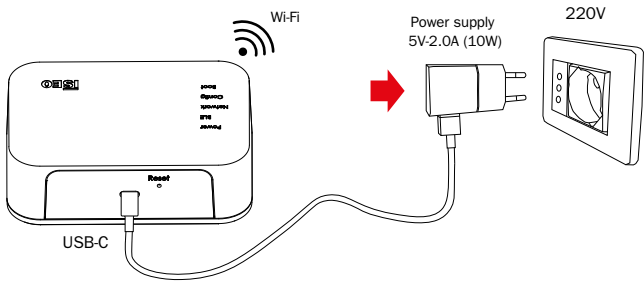

PoE Smart Gateway

To be used if the WiFi network is not present or has usage restrictions (tertiary/commercial market). The Ethernet connection can also be used as a power supply for the device (Power over Ethernet).

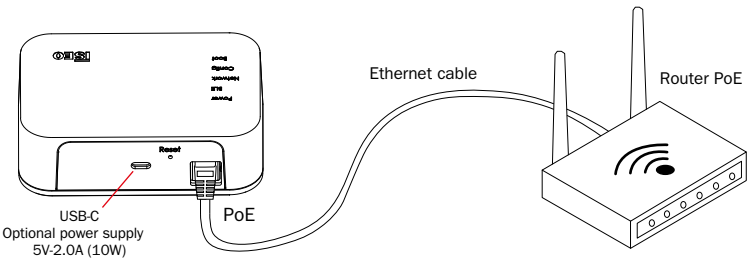

2

Optional.
Choose accessories to complete the system

Go to page


● **SELECTION GUIDE**

MODELS

- **WIFI** p. 105
- **Power over Ethernet** p. 106

Smart Gateway WIFI

IT ALLOWS YOU TO MANAGE YOUR ARGO SYSTEM
FROM REMOTE WITHOUT CABLED IP CONNECTIONS

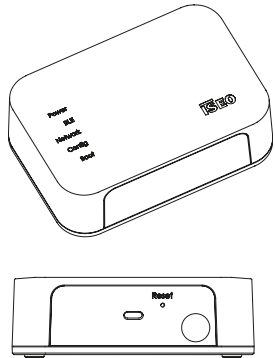

Technical features

FIRMWARE ARGO

POWER UNIT

Powered by USB C +5VDC input power 2A (10W).
Power supply not included (accessory to order separately).

HARDWARE SPECIFICATIONS

- ARM A7 based CPU module
- 512 MB RAM
- 8 GB Flash eMMC Non volatile Memory

MOUNTING

- Desktop
- Wall mounted

WORKING TEMPERATURE

0°C ÷ +50°C

STORAGE TEMPERATURE

-25°C ÷ +75°C

PACKAGE

1 Smart Gateway WIFI
Power supply not included (accessory to order)

ACCESSORIES (NOT INCLUDED)

- Power supply (cod. 0000A00155)
- Wall fixing brackets kit (cod. 0000A00154)

code **5E075524**

 Accessories

DIMENSIONS



- Width: 125 mm
- Depth: 40 mm
- Height: 85 mm

ONLINE CONTENT

- | | |
|--|--|
|  Web page |  User manual |
|  Data sheet |  Installation guide |
|  Leaflet |  Specifications |

Smart **Gateway** Power over Ethernet

CONNECT THE ARGO SYSTEM TO THE INTERNET VIA AN ETHERNET CABLE



Technical features

FIRMWARE ARGO

POWER UNIT

Requires PoE Switch IEEE 802.3af up to 15,4W.
Delivery of data and power over CAT5e/CAT6 ethernet cable.
Maximum power consumption 10W.

HARDWARE SPECIFICATIONS

- ARM A7 based CPU module
- 512 MB RAM
- 8 GB Flash eMMC Non volatile Memory

MOUNTING

- Desktop
- Wall mounted

WORKING TEMPERATURE

0°C ÷ +50°C

STORAGE TEMPERATURE

-25°C ÷ +75°C

PACKAGE

1 Smart Gateway PoE

ACCESSORIES (NOT INCLUDED)

- Wall fixing brackets kit (cod. 0000A00154)

code **5E075514**

 Accessories

DIMENSIONS

- Width: 125 mm
- Depth: 40 mm
- Height: 85 mm

ONLINE CONTENT

 Web page

 Data sheet

 Leaflet


 User manual

 Installation guide

 Specifications


Smart Gateway

Accessories



POWER SUPPLY
IN = 100-240V50-60Hz 0.50A
OUT = 5.0Vdc 2A (10W)
USB A to USB C 1.5 mt cable

1 0000A00155




WALL FIXING KIT
nr. 1 Wall bracket
nr. 1 Gateway bracket
nr. 2 Screws
nr. 4 Wall plugs and screws

1 0000A00154

ARGO Cards

MASTER CARD SET.
 3 cards (#1, #2, #3 the next Master automatically cancels the previous one).
 Package: 3 cards, instructions.




DESFire EV2 With ISEO logo	1	5E405309.3
-------------------------------	---	------------

USER CARDS



DESFire EV2 With ISEO logo and UID	1	5E405301
---------------------------------------	---	----------



MIFARE CLASSIC		
With ISEO logo and UID	10	5E402001.A
Blank on both sides	10	5E402011

ARGO Keyfob and bracelet



USER KEYFOB		
Leather-like Keyfob DESFire EV2 With ISEO logo and UID	1	5E425301



Black ABS Keyfob DESFire EV2 With ISEO logo and UID	2	5E415101
--	---	----------



MIFARE CLASSIC With ISEO logo and UID	4	KEYFOB1356MF1
--	---	---------------



Silicone Wristband DESFire EV3 With ISEO logo and UID - Not suitable to be used with X1R Smart Hidden RFID Reader	2	5E435101
---	---	----------

Code configurator

Some products are available in different versions to suit customer requirements and the characteristics of the doors on which they are to be installed.

Please use the configurator of the specific product model to create the code you wish to order.

Aries Smart 2.1

[Go to page](#)

- Standard p. 111
- For panic devices p. 112
- For custom handles p. 113
- For custom handles, for panic devices p. 114
- For DIN lock p. 115
- For fire locks p. 116
- For Premi Apri Meroni locks p. 117

Libra X Smart

[Go to page](#)

- Standard p. 118
- Premium p. 119
- Half p. 120
- Double p. 121
- Removable reader and Extension plug 16 mm p. 122
- Removable reader and Extension plug 75 mm p. 123
- Dummy-knob p. 124
- Oval Australian p. 125
- Oval Scandinavian p. 126


Multiblindo Smart

[Go to page](#)

- Standard p. 127

Aries Smart 2.1 Standard

ELECTRONIC TRIM RFID/BLEUETOOTH® SET STANDARD

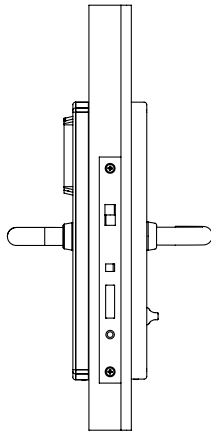

CODE CONFIGURATOR

0	0	E	1				1	6	5	
										FINISHES
Without cylinder hole in the cover										1
VISIBLE cylinder hole - center distance 85 mm										2
VISIBLE cylinder hole - center distance 92 mm										3
VISIBLE cylinder hole - center distance 70 mm										4
VISIBLE cylinder hole - center distance 72 mm										5
VISIBLE cylinder hole - center distance 88 mm										6
Internal usage version (IP54)										1
External usage version (IP55)										7
										1 Electric emergency – with privacy *
										2 Electric emergency – without privacy *
										3 Mechanical emergency – with privacy
										4 Mechanical emergency – without privacy


* ONLY compatible to configuration
Without cylinder hole in the cover
(code 1 in fifth position)

Product options

OVERRIDE CYLINDER HOLE EXTERNAL SIDE	IP RATING	EMERGENCY OVERRIDE CYLINDER	EXTERNAL EMERGENCY POWER SUPPLY	PRIVACY DEVICE
To chose if a mechanical emergency cylinder is used. The mechanical cylinder is still accessible without cylinder hole, by turning the plate.	For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.	High Security ISEO R90 Factory Monoprofile. Up to 3 mechanical recodings. Usage detected by electronics. KA on the same installation.	For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.	Internal ergonomic knob to activate privacy. Signal reset after each door opening.

Aries Smart 2.1 For panic devices

ELECTRONIC TRIM RFID/BLEUETOOTH® SET FOR PANIC DEVICES

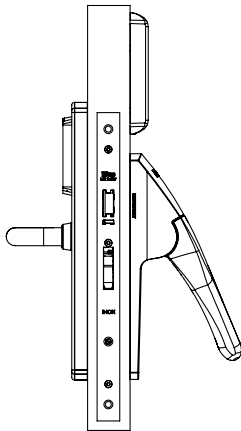

CODE CONFIGURATOR

	0	0	E	1				1	6	5	
Without cylinder hole in the cover	1										
VISIBLE cylinder hole - center distance 85 mm	2										
VISIBLE cylinder hole - center distance 92 mm	3										
VISIBLE cylinder hole - center distance 70 mm	4										
VISIBLE cylinder hole - center distance 72 mm	5										
VISIBLE cylinder hole - center distance 88 mm	6										
Internal usage version (IP54)	2										
External usage version (IP55)	8										
											FINISHES
											2 Inox
											2 Electric emergency – without privacy *
											4 Mechanical emergency – without privacy


* ONLY compatible to configuration
Without cylinder hole in the cover
(code 1 in fifth position)

Product options

OVERRIDE CYLINDER HOLE EXTERNAL SIDE	IP RATING	EMERGENCY OVERRIDE CYLINDER	EXTERNAL EMERGENCY POWER SUPPLY
To chose if a mechanical emergency cylinder is used. The mechanical cylinder is still accessible without cylinder hole, by turning the plate.	For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.	High Security ISEO R90 Factory Monoprofile. Up to 3 mechanical recodings. Usage detected by electronics. KA on the same installation.	For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.

Aries Smart 2.1 For custom handles

ELECTRONIC TRIM RFID/BLEETOOTH® SET FOR CUSTOM HANDLES

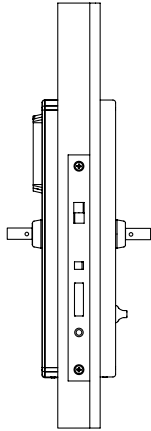

CODE CONFIGURATOR

0 0 E 2 1 6 5

- Without cylinder hole in the cover 1

VISIBLE cylinder hole - center distance 85 mm 2

VISIBLE cylinder hole - center distance 92 mm 3

VISIBLE cylinder hole - center distance 70 mm 4

VISIBLE cylinder hole - center distance 72 mm 5

VISIBLE cylinder hole - center distance 88 mm 6
- FINISHES

1 Industrial Packaging

2 Inox
- Internal usage version (IP54) 1

External usage version (IP55) 7
- 1 Electric emergency – with privacy *

2 Electric emergency – without privacy *

3 Mechanical emergency – with privacy

4 Mechanical emergency – without privacy


* ONLY compatible to configuration
Without cylinder hole in the cover
(code 1 in fifth position)

Product options

OVERRIDE CYLINDER HOLE EXTERNAL SIDE	IP RATING	EMERGENCY OVERRIDE CYLINDER	EXTERNAL EMERGENCY POWER SUPPLY	PRIVACY DEVICE
To chose if a mechanical emergency cylinder is used. The mechanical cylinder is still accessible without cylinder hole, by turning the plate.	For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.	High Security ISEO R90 Factory Monoprofile. Up to 3 mechanical recodings. Usage detected by electronics. KA on the same installation.	For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.	Internal ergonomic knob to activate privacy. Signal reset after each door opening.

Aries Smart 2.1 For custom handles, for panic devices

ELECTRONIC TRIM RFID/BLEETOOTH® SET FOR PANIC DEVICES

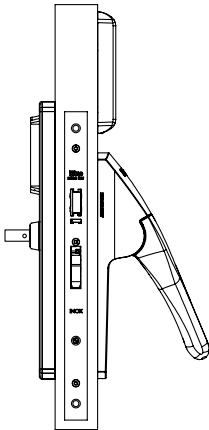

CODE CONFIGURATOR

0
0
E
2
1
6
5

I

Without cylinder hole in the cover 1
VISIBLE cylinder hole - center distance 85 mm 2
VISIBLE cylinder hole - center distance 92 mm 3
VISIBLE cylinder hole - center distance 70 mm 4
VISIBLE cylinder hole - center distance 72 mm 5
VISIBLE cylinder hole - center distance 88 mm 6

Internal usage version (IP54) 2
External usage version (IP55) 8

FINISHES

I Industrial Packaging

2 Inox

2 Electric emergency – without privacy *


4 Mechanical emergency – without privacy

* ONLY compatible to configuration
Without cylinder hole in the cover
(code 1 in fifth position)

Product options

OVERRIDE CYLINDER HOLE EXTERNAL SIDE	IP RATING	EMERGENCY OVERRIDE CYLINDER	EXTERNAL EMERGENCY POWER SUPPLY
To chose if a mechanical emergency cylinder is used. The mechanical cylinder is still accessible without cylinder hole, by turning the plate.	For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.	High Security ISEO R90 Factory Monoprofile. Up to 3 mechanical recodings. Usage detected by electronics. KA on the same installation.	For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.

CODE CONFIGURATOR

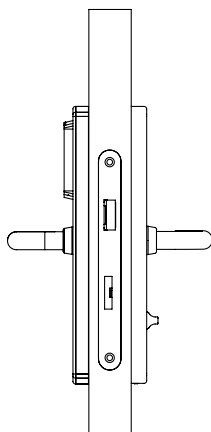

0 0 E 1 1 6 5

VISIBLE cylinder hole - center distance 72 mm 8

Without cylinder hole in the cover B

Internal usage version (IP54) 1

External usage version (IP55) 7

FINISHES

— 2 Inox

1 Electric emergency – with privacy *

2 Electric emergency – without privacy *

3 Mechanical emergency – with privacy

4 Mechanical emergency – without privacy


* ONLY compatible to configuration
Without cylinder hole in the cover
(code B in fifth position)

Product options

EXTERNAL SIDE	IP RATING	EMERGENCY OVERRIDE CYLINDER	EXTERNAL EMERGENCY POWER SUPPLY	PRIVACY DEVICE
To chose if a mechanical emergency cylinder is used. The mechanical cylinder is still accessible without cylinder hole, by turning the plate.	For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.	High Security ISEO R90 Factory Monoprofile. Up to 3 mechanical recodings. Usage detected by electronics. KA on the same installation.	For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.	Internal ergonomic knob to activate privacy. Signal reset after each door opening.

Aries Smart 2.1 For fire locks

ELECTRONIC TRIM RFID/BLEUETOOTH® SET
FOR FIRE LOCKS

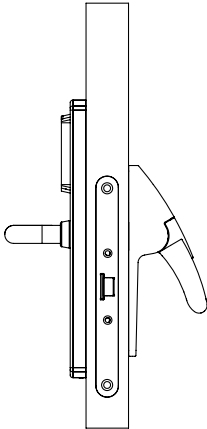

CODE CONFIGURATOR

0
0
E
1
9

Internal usage version (IP54) 2
External usage version (IP55) 8

0
1
6
5

FINISHES
2 Inox


Product options

IP RATING

For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.

Aries Smart 2.1 For Premi Apri Meroni locks

ELECTRONIC TRIM RFID/BLEETOOTH® SET FOR PREMI APRI MERONI LOCKS

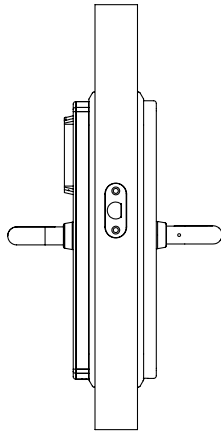

CODE CONFIGURATOR

0

0

E

1

A

1

6

5

Internal usage version (IP54) 1

External usage version (IP55) 7

FINISHES

2 Inox

0 Without emergency


2 Electric emergency - without privacy

Product options

IP RATING	EMERGENCY OVERRIDE CYLINDER	EXTERNAL EMERGENCY POWER SUPPLY	PRIVACY DEVICE
For internal (IP54) or external (IP55 with resistance to salty atmosphere) usage.	High Security ISEO R90 Factory Monoprofile. Up to 3 mechanical recodings. Usage detected by electronics. KA on the same installation.	For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.	Internal ergonomic knob to activate privacy. Signal reset after each door opening.

Libra X Smart Standard

MODULAR CYLINDER WITH EXTERNAL
RFID/BLEETOOTH® ELECTRONIC KNOB
(FREE ROTATION) AND INTERNAL MECHANICAL KNOB
(STANDARD TYPE)

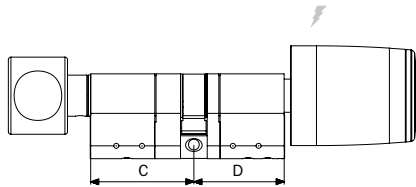

CODE CONFIGURATOR

8
M
X
8
6
5

Heavy Duty
1

Standard
2

Removable external knob
(Heavy Duty)
/**
4

DIMENSION

C

30**/***

35

40

45

50

55

60

65

70

75

...

...

130

DIMENSION

D

30

35

40

45

50

55

60

65

70

75

...

...

130

FINISHES

24

Inox - Matte White

25

Inox - Matte Black

P

PANIC function

L max 260 mm

** not available Panic function version
*** not compatible with version "external removable knob"
**** L max 180 mm (L max per side 90 mm)

Product options

HEAVY DUTY LIBRA X KNOB

Version with drilling protection on the opening mechanism.

REMOVABLE EXTERNAL KNOB


Removable knob (Heavy Duty characteristics).

PANIC VERSION FOR PANIC LOCK

Freely rotating with cam returning in vertical position.

Libra X Smart Premium

MODULAR CYLINDER WITH EXTERNAL ELECTRONIC
RFID/BLEETOOTH® KNOB (FREE ROTATION) AND
INTERNAL MECHANICAL KNOB (PREMIUM TYPE)

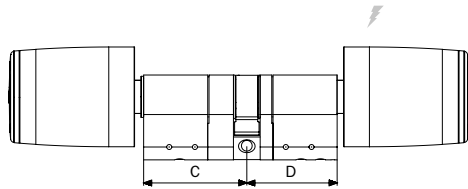

CODE CONFIGURATOR

8 M X
0
6 5

Heavy Duty 1
Standard 2
Removable external knob (Heavy Duty) **/**** 4

DIMENSION C

30**/****

35

40

45

50

55

60

65

70

75

...

...

130

DIMENSION D

30

35

40

45

50

55

60

65

70

75

...

...

130

FINISHES

24

Inox - Matte White

25

Inox - Matte Black

P PANIC function **/****

L max 260 mm

** not available Panic function version

*** not compatible with version "external removable knob"

**** L max 180 mm (L max per side 90 mm)

Product options

HEAVY DUTY LIBRA X KNOB

Version with drilling protection on the opening mechanism.

REMOVABLE EXTERNAL KNOB

Removable knob (Heavy Duty characteristics).

PANIC VERSION FOR PANIC LOCK

Freely rotating with cam returning in vertical position.

119


Libra X Smart Half

MODULAR HALF KNOB CYLINDER
WITH EXTERNAL ELECTRONIC RFID/BLEETOOTH®
KNOB (FREE-ROTATING)



CODE CONFIGURATOR

8 M X 0 1 0 6 5



	DIMENSION C	DIMENSION D	FINISHES
Heavy Duty 1	30 **		
Standard 2	35		
Removable external knob (Heavy Duty) ***	40		
	45		
	50		
	55		
	60		
	65		
	70		
	75		
	...		
	...		
	180		
	L max 190 mm		
			24 Inox - Matte White
			25 Inox - Matte Black

Product options

HEAVY DUTY LIBRA X KNOB

Version with drilling protection on the opening mechanism.

REMOVABLE EXTERNAL KNOB

Removable knob
(Heavy Duty characteristics).

** Libra monoprofile 30/10 removable reader is not modular.
Lenght 35/10 and up is modular.
*** L max 90/10

Libra X Smart Double

MODULAR CYLINDER WITH EXTERNAL ELECTRONIC
RFID/BLEETOOTH® KNOB (FREE-ROTATING) AND
INTERNAL ELECTRONIC KNOB (FREE-ROTATING)




CODE CONFIGURATOR

8 M X E 6 5

	DIMENSION	DIMENSION	FINISHES
	C	D	
Heavy Duty 1		30	
Standard 2	35	35	
	40	40	
	45	45	
	50	50	
	55	55	
	60	60	
	65	65	
	70	70	
	75	75	
	...	...	
	...	...	24 Inox - Matte White
	90	90	25 Inox - Matte Black

L max 180 mm

** C = side with removable electronic knob

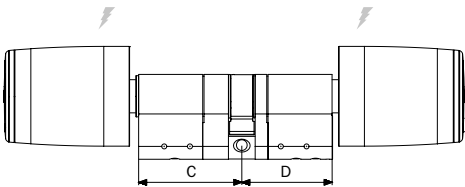


Product options

HEAVY DUTY
LIBRA X KNOB

Version with drilling protection on the
opening mechanism.

Libra X Smart Removable reader and Extension plug 16 mm

MODULAR CYLINDER FOR ARMORED DOORS WITH EXTERNAL ELECTRONIC RFID/BLEETOOTH® KNOB (FREE ROTATION), COMPATIBLE WITH CYLINDERS ESCUTCHEON, EXTENSION PLUG AND PRE-ARRANGED FOR INTERNAL KNOB SHAFT D 8X16 MM

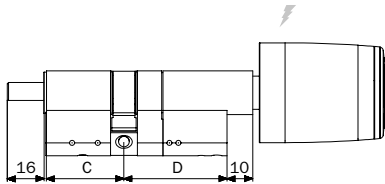

CODE CONFIGURATOR

8 M X 3 6

6 5

DIMENSION	DIMENSION	FINISHES
C	D	
30	30	
35	35	
40	40	
45	45	
50	50	
55	55	24 Inox - Matte White
60	60	25 Inox - Matte Black
70	70	
...	...	
...	...	
90	85	

L max 175 mm

Product options

HEAVY DUTY
LIBRA X KNOB

Version with drilling protection on the opening mechanism.

Libra X Smart Removable reader and Extension plug 75 mm

MODULAR CYLINDER FOR ARMORED DOORS WITH
EXTERNAL ELECTRONIC RFID/BLEUETOOTH® KNOB
(FREE ROTATION), COMPATIBLE WITH CYLINDERS
ESCUTCHEON, EXTENSION PLUG AND PRE-
ARRANGED FOR INTERNAL KNOB SHAFT D 8X75 MM



CODE CONFIGURATOR

8 M X 3 6

D 0

6 5

DIMENSION C

DIMENSION D

FINISHES

75

C

D

10

30

35

40

45

50

55

60

70

...

...

85

24 Inox - Matte White

25 Inox - Matte Black

L max 115 mm


Product options

HEAVY DUTY
LIBRA X KNOB

Version with drilling protection on the
opening mechanism.

Libra X Smart Dummy-knob

MODULAR CYLINDER FOR ARMORED DOORS
WITH EXTERNAL ELECTRONIC RFID/BLEETOOTH®
KNOB (FREE ROTATION) AND KNOB-DUMMY
ON INTERNAL SIDE

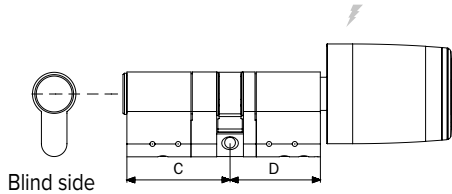

CODE CONFIGURATOR

8 M X

C

6 5

	DIMENSION C	DIMENSION D	FINISHES	
Heavy Duty 1	30**/***	30	P PANIC function **/**** 24 Inox - Matte White 25 Inox - Matte Black	
Standard 2	35	35		
Removable external knob (Heavy Duty) **/****	40	40		
	45	45		
	50	50		
	55	55		
	60	60		
	65	65		
	70	70		
	75	75		
	...	...		
	...	...		
	130	130		

L max 260 mm

Product options

HEAVY DUTY LIBRA X KNOB

Version with drilling protection on the opening mechanism.

REMOVABLE EXTERNAL KNOB

Removable knob
(Heavy Duty characteristics).


PANIC VERSION FOR PANIC LOCK

Freely rotating with cam returning
in vertical position.

** not available Panic function version
*** not compatible with version "external removable knob"
**** L max 180 mm (L max per side 90 mm)

Libra X Smart Oval Australian

OVAL AUSTRALIAN ELECTRONIC CYLINDER
WITH EXTERNAL RFID/BLEETOOTH® ELECTRONIC
KNOB (FREE ROTATION)



CODE CONFIGURATOR

8
S
X

9
0
0

3

9

6
5

Heavy Duty 1

Standard 2

DIMENSION

39

FINISHES

24

Inox - Matte White

25

Inox - Matte Black

Product options


HEAVY DUTY
LIBRA X KNOB

Version with drilling protection on the
opening mechanism.

Multiblando Smart

MOTORIZED SELF-LOCKING MULTI-POINT LOCK,
WITH A HIGH LEVEL OF SECURITY, SUITABLE FOR
METAL FRAME DOORS MULTIPLE LOCKING POINTS,
TO BE COMBINED WITH CONNECTION BOX

CODE CONFIGURATOR

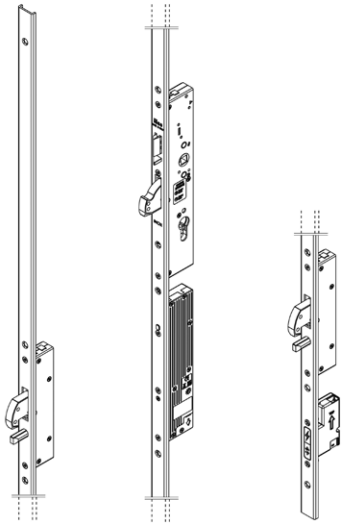

7 A 3 E 2 5

FRONT
SHAPE

BACKSET

D Right

S Left

U-shaped - stainless steel - 24x6x2300 mm

Flat front- stainless steel - 24x3x2300 mm

00

10

35

40

45

50

55

60

65

Product options

FRONT SHAPE

BACKSET (mm)

RIGHT/LEFT

Flat front 24X3 mm stainless steel.
U-shaped front 24X6 mm stainless steel.

Available in versions with
35,40,45,50,55,60,65 mm backset

Right and left version
according to DIN 107.

Phased out products

The table shows the replacement codes for phased out products. If no replacement code is available, please consult the catalogue to assess the right product solution.

 Accessories for discontinued items

Code	Product model	Title	Description	Substitution code	Go to page
00E1xxx155x	Aries Smart 2.0	Standard	Electronic trim RFID/Bluetooth® Set standard	00E1xxx165x	→ 
00E1xxx155x	Aries Smart 2.0	For panic devices	Electronic trim RFID/Bluetooth® set for panic devices	00E1xxx165x	→ 
00E2xxx155xl	Aries Smart 2.0	For custom handles	Electronic trim RFID/Bluetooth® set for custom handles	00E2xxx165xl	→ 
00E2xxx155xl	Aries Smart 2.0	For custom handles for panic devices	For custom handles for panic devices electronic trim RFID/Bluetooth® set for panic devices	00E2xxx165xl	→ 
00E1xxx155x	Aries Smart 2.0	For DIN lock	Electronic trim RFID/Bluetooth® set for din lock	00E1xxx165x	→ 
00E19x0155x	Aries Smart 2.0	For fire locks	Electronic trim RFID/Bluetooth® set for fire locks	00E19x0165x	→ 
00E1Axx155x	Aries Smart 2.0	For Premi Apri Meroni locks	Electronic trim RFID/Bluetooth® set for premi apri meroni locks	00E1Axx165x	→ 
8MKx8xxxxxx65x	Libra LE60 Smart 2.1	Standard	Modular cylinder with external electronic knob (free rotation) and internal mechanical knob (standard type)	8MKx8xxxxxx65x	→ 
8MKx0xxxxxx65x	Libra LE60 Smart 2.1	Premium	Modular cylinder with external electronic knob (free rotation) and internal mechanical knob (premium type)	8MKx0xxxxxx65x	→ 
8MKx0xx10xx65x	Libra LE60 Smart 2.1	Half	Modular half knob cylinder with external electronic knob (free-rotating)	8MKx0xx10xx65	→ 

Phased out products


 Accessories for discontinued items

Code	Product model	Title	Description	Substitution code	Go to page
8MKxExxxxx65	Libra LE60 Smart 2.1	Double	Modular cylinder with external electronic knob (free-rotating) and internal electronic knob (free-rotating)	8MKxExxxxx65	→ 
8MK36xxxxx65	Libra LE60 Smart 2.1	Removable reader and Extension plug 16 mm	Modular cylinder for armored doors with external electronic knob (free rotation), compatible with cylinders escutcheon, extension plug and pre-arranged for internal knob shaft D 8x16 mm	8MK36xxxxx65	→ 
8MK36D0xxx65	Libra LE60 Smart 2.1	Removable reader and Extension plug 75 mm	Modular cylinder for armored doors with external electronic knob (free rotation), compatible with cylinders escutcheon, extension plug and pre-arranged for internal knob shaft D 8x75 mm	8MK36D0xxx65	→ 
8MKxCxxx65x	Libra LE60 Smart 2.1	Dummy-knob	Modular cylinder for armored doors with external electronic knob (free rotation) and knob-dummy on internal side	8MKxCxxx65x	→ 
8SKx90039xx65	Libra LE60 Smart 2.1	Oval Australian	Oval Australian electronic cylinder with external electronic knob (free rotation)	8SKx90039xx65	→ 
8SKx20032xx65	Libra LE60 Smart 2.1	Oval Scandinavian	Oval Scandinavian electronic cylinder with external electronic knob (free rotation)	8SKx20032xx65	→ 
5E1320156	Stylos Smart 2.0	Credential reader with led	Credential reader with led	5E152315	→ 
5E1320456	Stylos Smart 2.0	Credential reader with display and numeric keypad	Credential reader with display and numeric keypad	5E152325	→ 
5E1322106	Stylos Smart 2.0	All-weather credential reader module	All-weather credential reader module	-	-
5E0555010	Stylos Smart 2.0	Control unit for all-weather module	Control unit for all-weather module	-	-

Accessories for discontinued items


Accessories

BATTERY



BATTERY FOR POWER SUPPLY (Compatible only with Aries 2.0)
 Lithium battery.Size AA, 3.6V DC.
 Size AA, 3,6Vcc.

1058200000E0360



BATTERY (Compatible only with Libra LE60 2.0)
 FDK CR17335EF lithium battery 3V 1400 mAh.
 Size AA, 3,6Vcc.

10033960



ISEO Serrature S.p.A.
Via San Girolamo, 13
25055 Pisogne BS, Italy
Tel. +39 0364 8821
Fax +39 0364 882263
iseo@iseo.com

iseo.com