


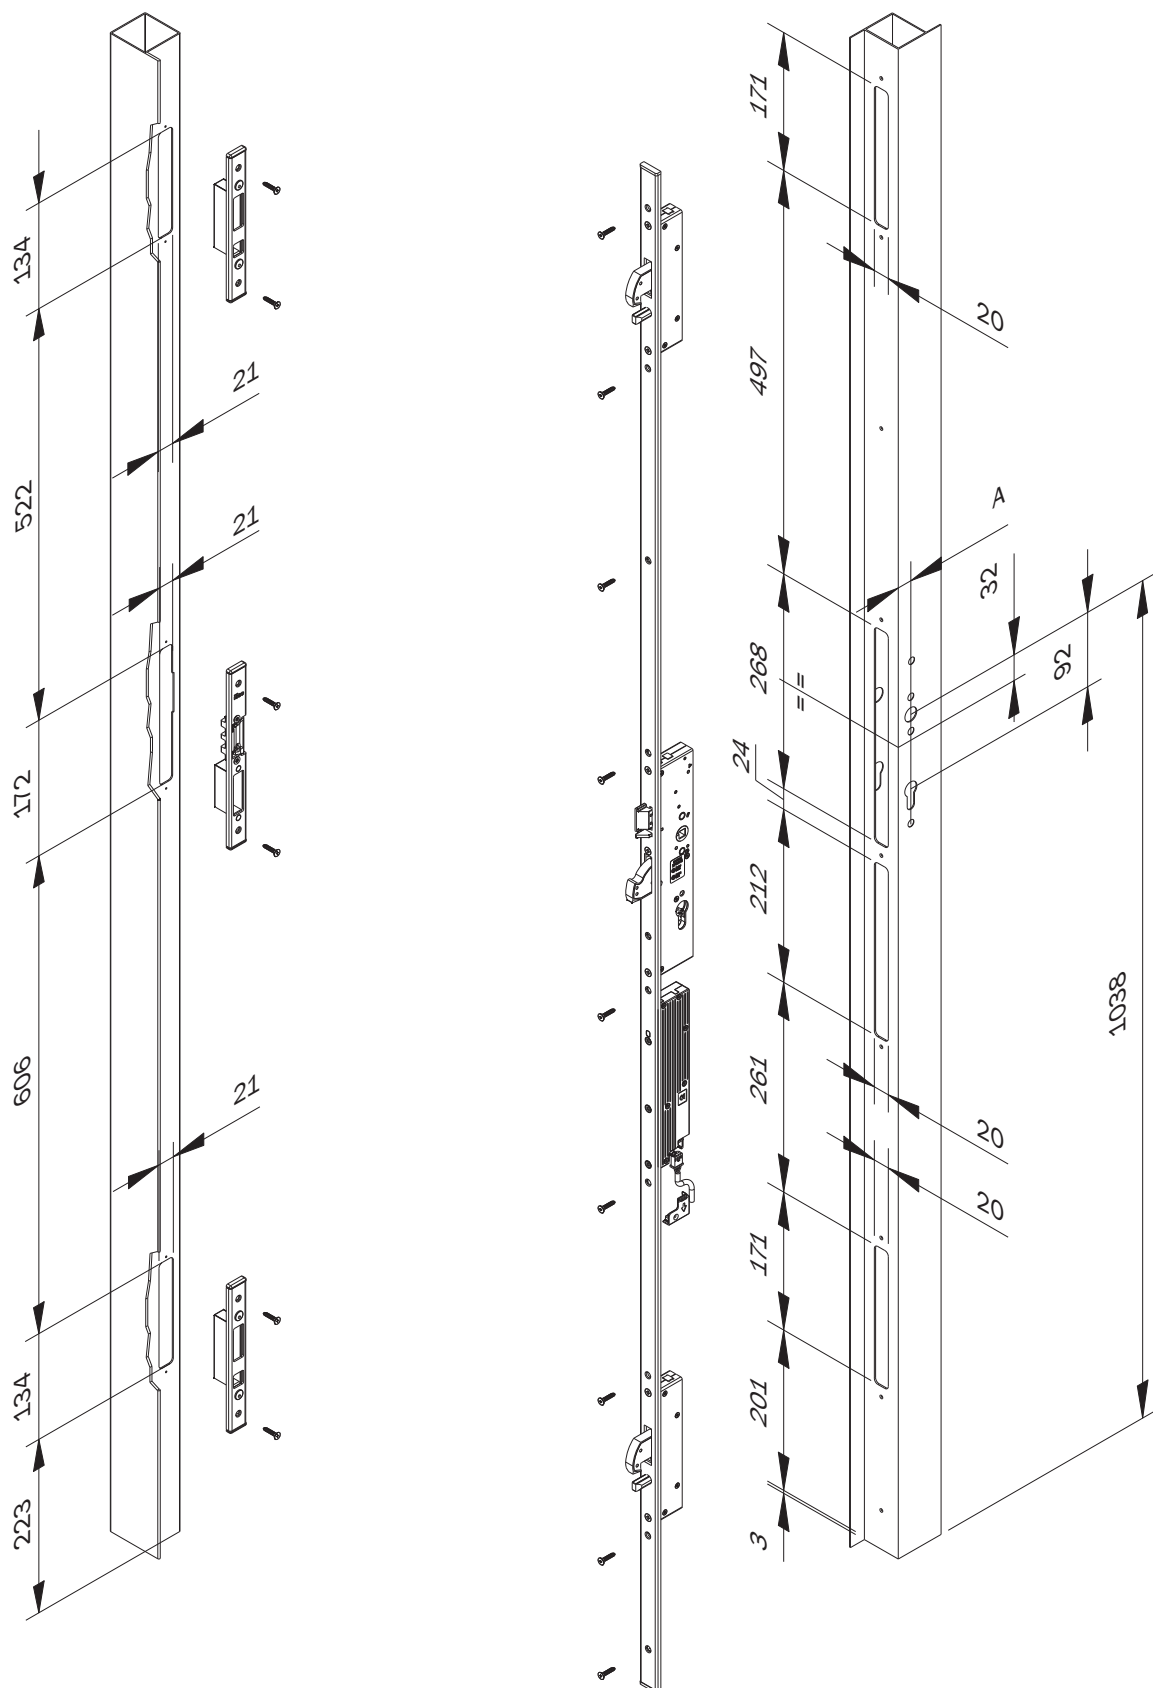


Multiblindo Emotion Exit


Istruzioni di montaggio
Assembling instructions
Instructions de montage
Montageanleitung
Instrucciones para el montaje

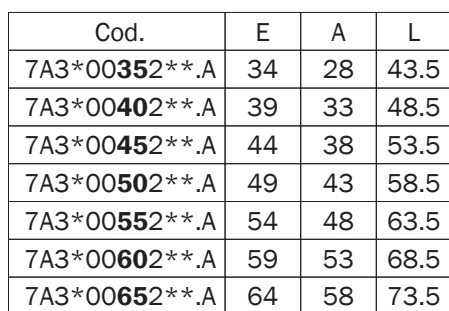

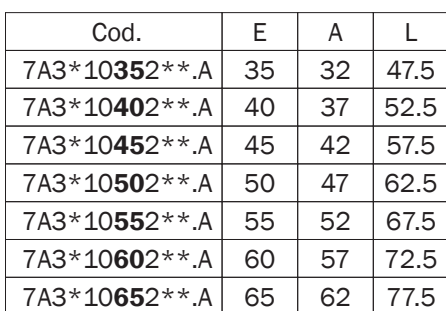


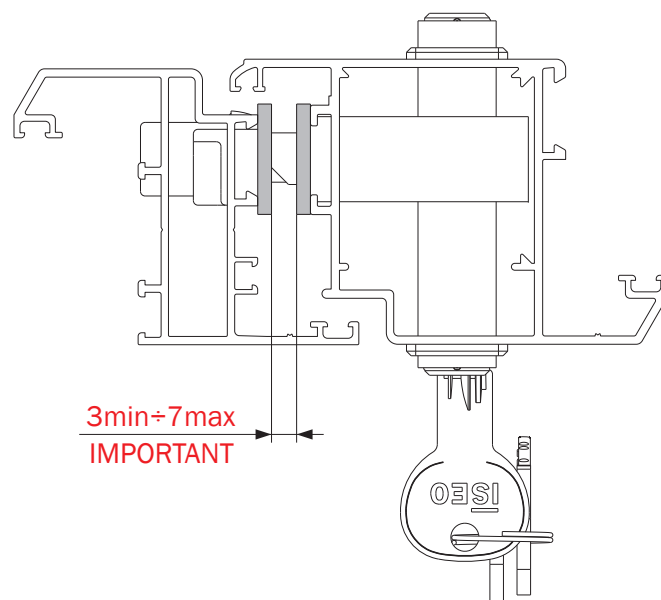

3min÷7max
IMPORTANT

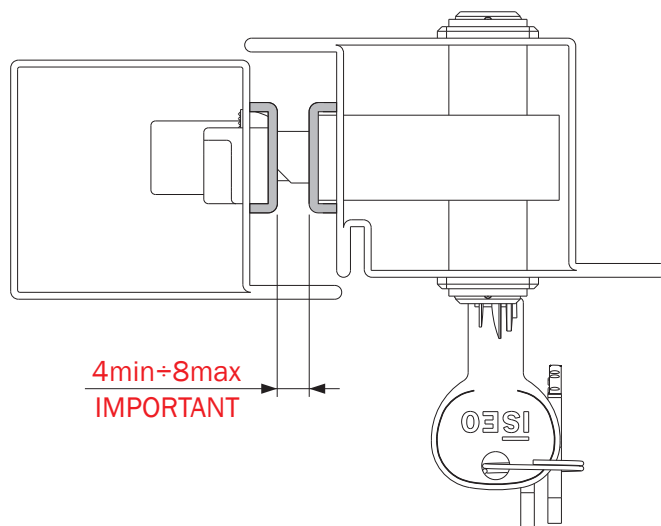

4min÷8max
IMPORTANT

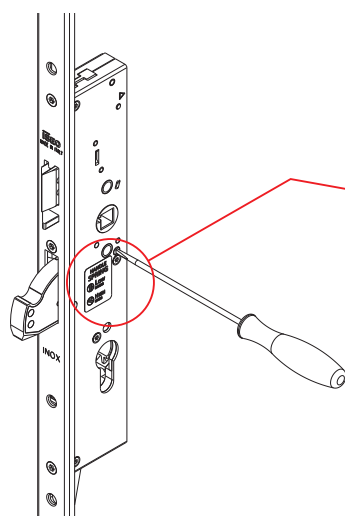

HANDLE
SPRING

Low
EN1125

High
EN179

Quando la serratura è utilizzata in un kit antipanico EN1125 in abbinamento alla barra Pro Exit il selettore deve essere posizionato su "Low".
Quando la serratura è utilizzata in un kit antipanico EN179 in abbinamento alle maniglie a leva listate nel certificato di costanza delle prestazioni il selettore deve essere posizionato su "High".

*When the lock is used in an EN1125 panic kit in combination with the Pro Exit bar, the selector must be set to 'Low'.
When the lock is used in an EN179 panic kit in combination with the lever handles listed in the certificate of constancy of performance, the selector must be set to "High".*



0497/CPR/5639

0086/CPR/747907

0497/CPR/5638

0086/CPR/747917

0497/CPR/5640

Lock without extension for single leaf:

EN1125:2008

3 | 7 | 7 | B | 1 | 4 | 2 | 1 | A | B |



EN179:2008

3 | 7 | 7 | B | 1 | 4 | 5 | 2 | A | B |

EN14846:2008

3 | X | 9 | F | 0 | P | 7 | 1 | 3 |

Lock plus extensions (single or active plus semi-fix leaf) and/or**Lock without extension for double leaves (active plus semi-fix):**

EN1125:2008

3 | 7 | 7 | A | 1 | 3 | 2 | 1 | A | A/B |



EN179:2008

3 | 7 | 7 | A | 1 | 3 | 5 | 2 | A | A/B |

Lock plus extensions (single or active plus semi-fix leaf) and/or**Lock without extension for double leaves (active plus semi-fix):**

EN14846:2008





3 | X | 6 | A | 0 | P | 7 | 1 | 3 |

CSI 001/20
BHA230010

V max 48V AC/DC

I max 1A (Resistive Load)

IP IP40

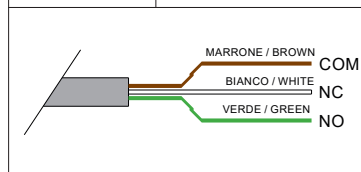

il grado 7 si ottiene con una piastra antitrapano o con un adeguata protezione inglobata nella porta stessa.

Grade 7 is achieved with a drill-proof plate or a suitable guard built into the door itself.

La classe 7 est obtenue grâce à une plaque anti-perçage ou à un dispositif de protection approprié intégré à la porte elle-même.

Güteklasse 7 wird mit einer aufbohrsicheren Platte oder einem geeigneten, in die Tür selbst eingebauten Schutz erreicht.

El grado 7 se consigue con una placa antitaladro o una protección adecuada integrada en la propia puerta.



<https://www.iseo.com/it/it/download>

Sicurezza dei beni per i punti di chiusura e anti-separazione.

Security of locking points and separation points

Sécurité des points de fermeture et anti-séparation

Sicherheit für Schließpunkte und die Einbruchschutzpunkte

Seguridad para puntos de cierre y antiseparación

3

7

3



Configurazioni certificate
Certified configurations
Configurations certifiées
Zertifizierte Konfigurationen
Configuraciones certificadas