Gateways

V364 Gateway

Version WiFi

THE GATEWAY OPERATES AS F9000 VALIDATOR FOR THE F9000 ON KEYS IN ITS BLUETOOTH RANGE (AROUND 10 METERS DEPENDING ON ENVIRONMENT CONDITIONS).






Validate your F9000 key via Bluetooth®

The V364 Gateway operates as validator for the F9000 ON keys. It communicates with the Atlas Master (V364 Classic) or Virtual Atlas Master (V364 on air or V364 Customer Hosted) with data connection and towards the F9000 ON keys with Bluetooth®. The V364 Gateway can validate all the F9000 ON keys in its Bluetooth® range (around 10 meters depending on environment conditions).

Product features

- "Desktop" format with the possibility of wall mounting
- Data conversion (WIFI or Ethernet) to Bluetooth®

Gateways V364 Gateway

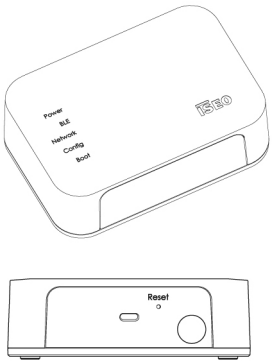

DIMENSIONS
- Width: 125mm
- Depth: 40mm
- Height: 85mm

MATERIAL
Technopolymer

COLOUR
White

cod. **5E072524**

COMMUNICATION INTERFACE

- USB type C
- Dual Band WIFI at 2.4 GHz and 5 GHz
- Ethernet to Bluetooth® data conversion

Technical features

FIRMWARE
1RIS

POWER UNIT
Powered by USB C +5VDC input power 2A (10W). Power supply not included (accessory to order separately).

HARDWARE SPECIFICATIONS
ARM A7 based CPU module
512 MB RAM
8 GB Flash eMMC Non volatile Memory

OPERATING SYSTEM
Embedded Linux

PRODUCT COMPATIBILITY
Compatible with ISEO F9000 ON keys

MOUNTING

- Wall mounted
- Desktop

WORKING TEMPERATURE
0°C ÷ +50°C
STORAGE TEMPERATURE
-25°C ÷ +75°C

PACKAGE
1 Gateway WIFI Power supply not included (accessory to order)

ACCESSORIES (NOT INCLUDED)
Power supply (code 0000A00155)
Wall fixing brackets kit (code 0000A00154)

Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
-	•	•	•

Updated 04/11/2026 - Non-contractual document. Subject to change.