


Libra X Smart



Standard

MODULAR CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEETOOTH® KNOB (FREE ROTATION) AND INTERNAL MECHANICAL KNOB (STANDARD TYPE)

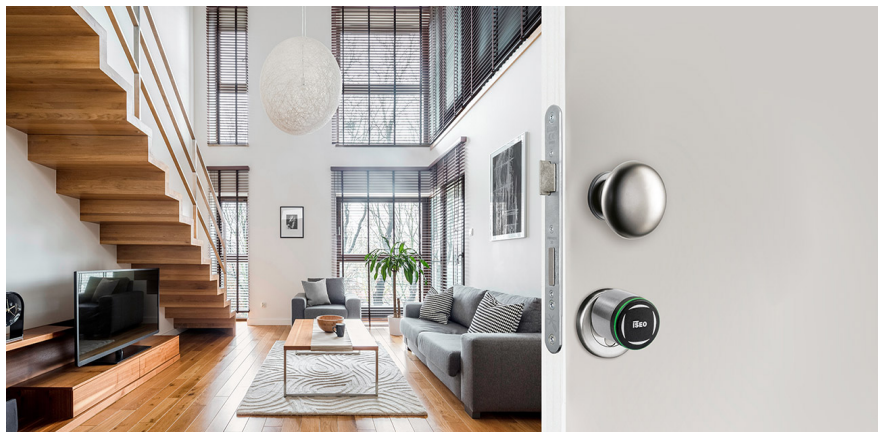

Suitable for different applications

Thanks to its easy and straightforward installation, the Libra X electronic modular cylinder is the ideal universal solution for access control, both for retrofit applications replacing European profile mechanical cylinders and for installations on new doors.

Easy to install

Battery-powered operation and the absence of electrical wiring ensure maximum flexibility and low installation costs, both for new installations and retrofit applications on existing doors.

Product features

- Wake up by RFID card detection or phone (patented)
- Battery-operated device with charge status detection
- Low energy consumption device
- Permanently open mode (office mode) without extra battery consumption
- Memorize up to 300 users credentials
- Records the last 1000 events
- Real Time Clock/Calendar
- Light and acoustic signals
- Programming and software updates by ARGO App on iOS and Android devices
- Block the Standard Users allowing access only to VIP users

Product options

HEAVY DUTY LIBRA KNOB


Version with drilling protection on the opening mechanism. IP rating IP66.

REMOVABLE EXTERNAL KNOB

Removable knob (Heavy Duty characteristics)

PANIC VERSION FOR PANIC LOCK

Freely rotating with cam returning in vertical position

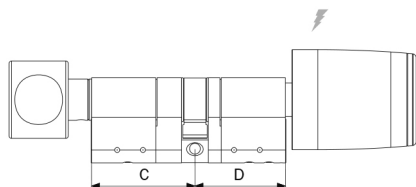

DIMENSIONS

Electronic knob dimensions:

- External diameter: 36 to 39 mm
- Length: 49 mm

"Standard" mechanical knob dimensions:

- External diameter: 30 mm
- Length: 31 mm

FINISH

Stainless

COLOUR

Matt black

Matte white

cod. **8MXX8XXXXXX65X**

ACCESS CREDENTIALS

- Apple Watch
- Badge
- Bracelet
- Keyfob
- Smartphone

COMMUNICATION INTERFACE

- Bluetooth® Low Energy 5.1
- RFID ISO14443B/MIFARE ISO14443A

CERTIFICATIONS

- EN 15684:2020 Standard Duty version 16B40D30 (DESFire Cards)
- EN 15684:2020 Heavy Duty version 16B40D3D (DESFire Cards)
- SKG***for HD (Heavy Duty) version

Technical features

FIRMWARE

ARGO

POWER UNIT

1 3V lithium battery type CR123

ESTIMATED BATTERY LIFE

Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE

-25°C / +65°C

STORAGE TEMPERATURE

-25°C / +65°C

PACKAGE

1 cylinder, 1 battery, fastener screw, 2 mm hex key, instruction sheet.

ACCESSORIES (NOT INCLUDED)

- Pre-assembled modules
- Assembled modular Libra components
- Electronic knob spare parts
- Premium knob covers (RFID and mechanical versions)

- Standard mechanical knob
- Anti-burglary accessories
- Assembly/disassembly tool set
- Installation tools for modular cylinders
- Design packaging

Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
		-	-