



MODULAR CYLINDER WITH EXTERNAL ELECTRONIC RFID/BLEETOOTH® KNOB (FREE-ROTATING) AND INTERNAL ELECTRONIC KNOB (FREE-ROTATING)

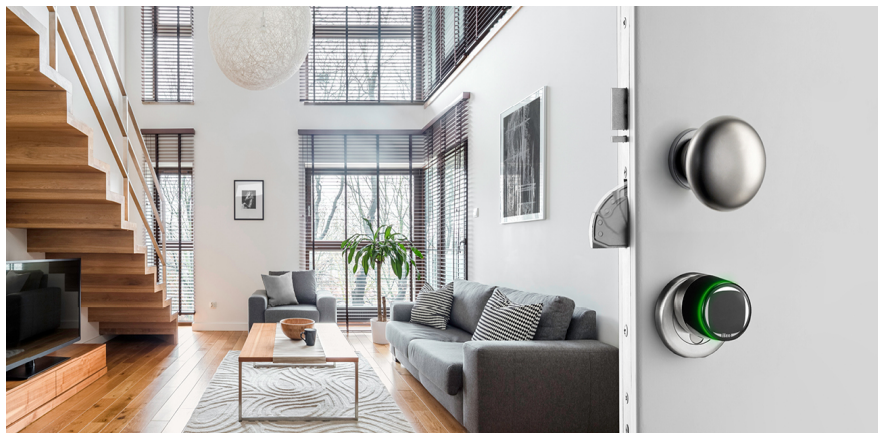

Product options

HEAVY DUTY LIBRA KNOB

Version with drilling protection on the opening mechanism. IP rating IP66.

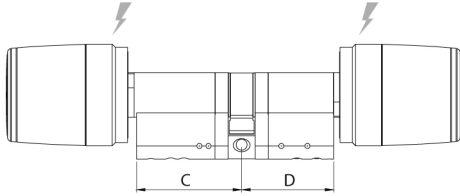**DIMENSIONS**

Electronic knob dimensions:

- External diameter from 36 to 39 mm
- Length: 46mm

FINISH

- Stainless
- Polished chrome
- Polished brass

COLOUR

- Black
- Metal grey
- White

cod. **#libra-x-4**

ACCESS CREDENTIALS

- Badge
- Keyfob
- Bracelet
- Smartphone

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1

CERTIFICATIONS

- EN 15684:2020 Standard Duty version 16B40D30 (DESFire Cards)
- EN 15684:2020 Heavy Duty version 16B40D3D (DESFire Cards)
- SKG***for HD (Heavy Duty) version

Technical features

FIRMWARE

1RIS

POWER UNIT

1 3V lithium battery type CR123

ESTIMATED BATTERY LIFE

Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

Compatible with all the mechanical locks equipped with an European profile cylinder hole (EN 1303, DIN 18252)

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- IP66
- IP67
- IP68
- IP69

WORKING TEMPERATURE

-20°C ÷ +70°C

STORAGE TEMPERATURE

-25°C ÷ +75°C

PACKAGE

1 cylinder, 2 battery, cylinder fixing screw, 2 mm hex key, instruction sheet

ACCESSORIES (NOT INCLUDED)

- Pre-assembled modules
- Assembled components Modular Libra
- Electronic knob spare parts
- Premium knob cover (RFID and mechanical version)

- Standard mechanical knob
- Anti-theft accessories
- Tool set for assembly/disassembly
- Modular cylinder mounting fixture
- Design packs

Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
-	-	-	-