
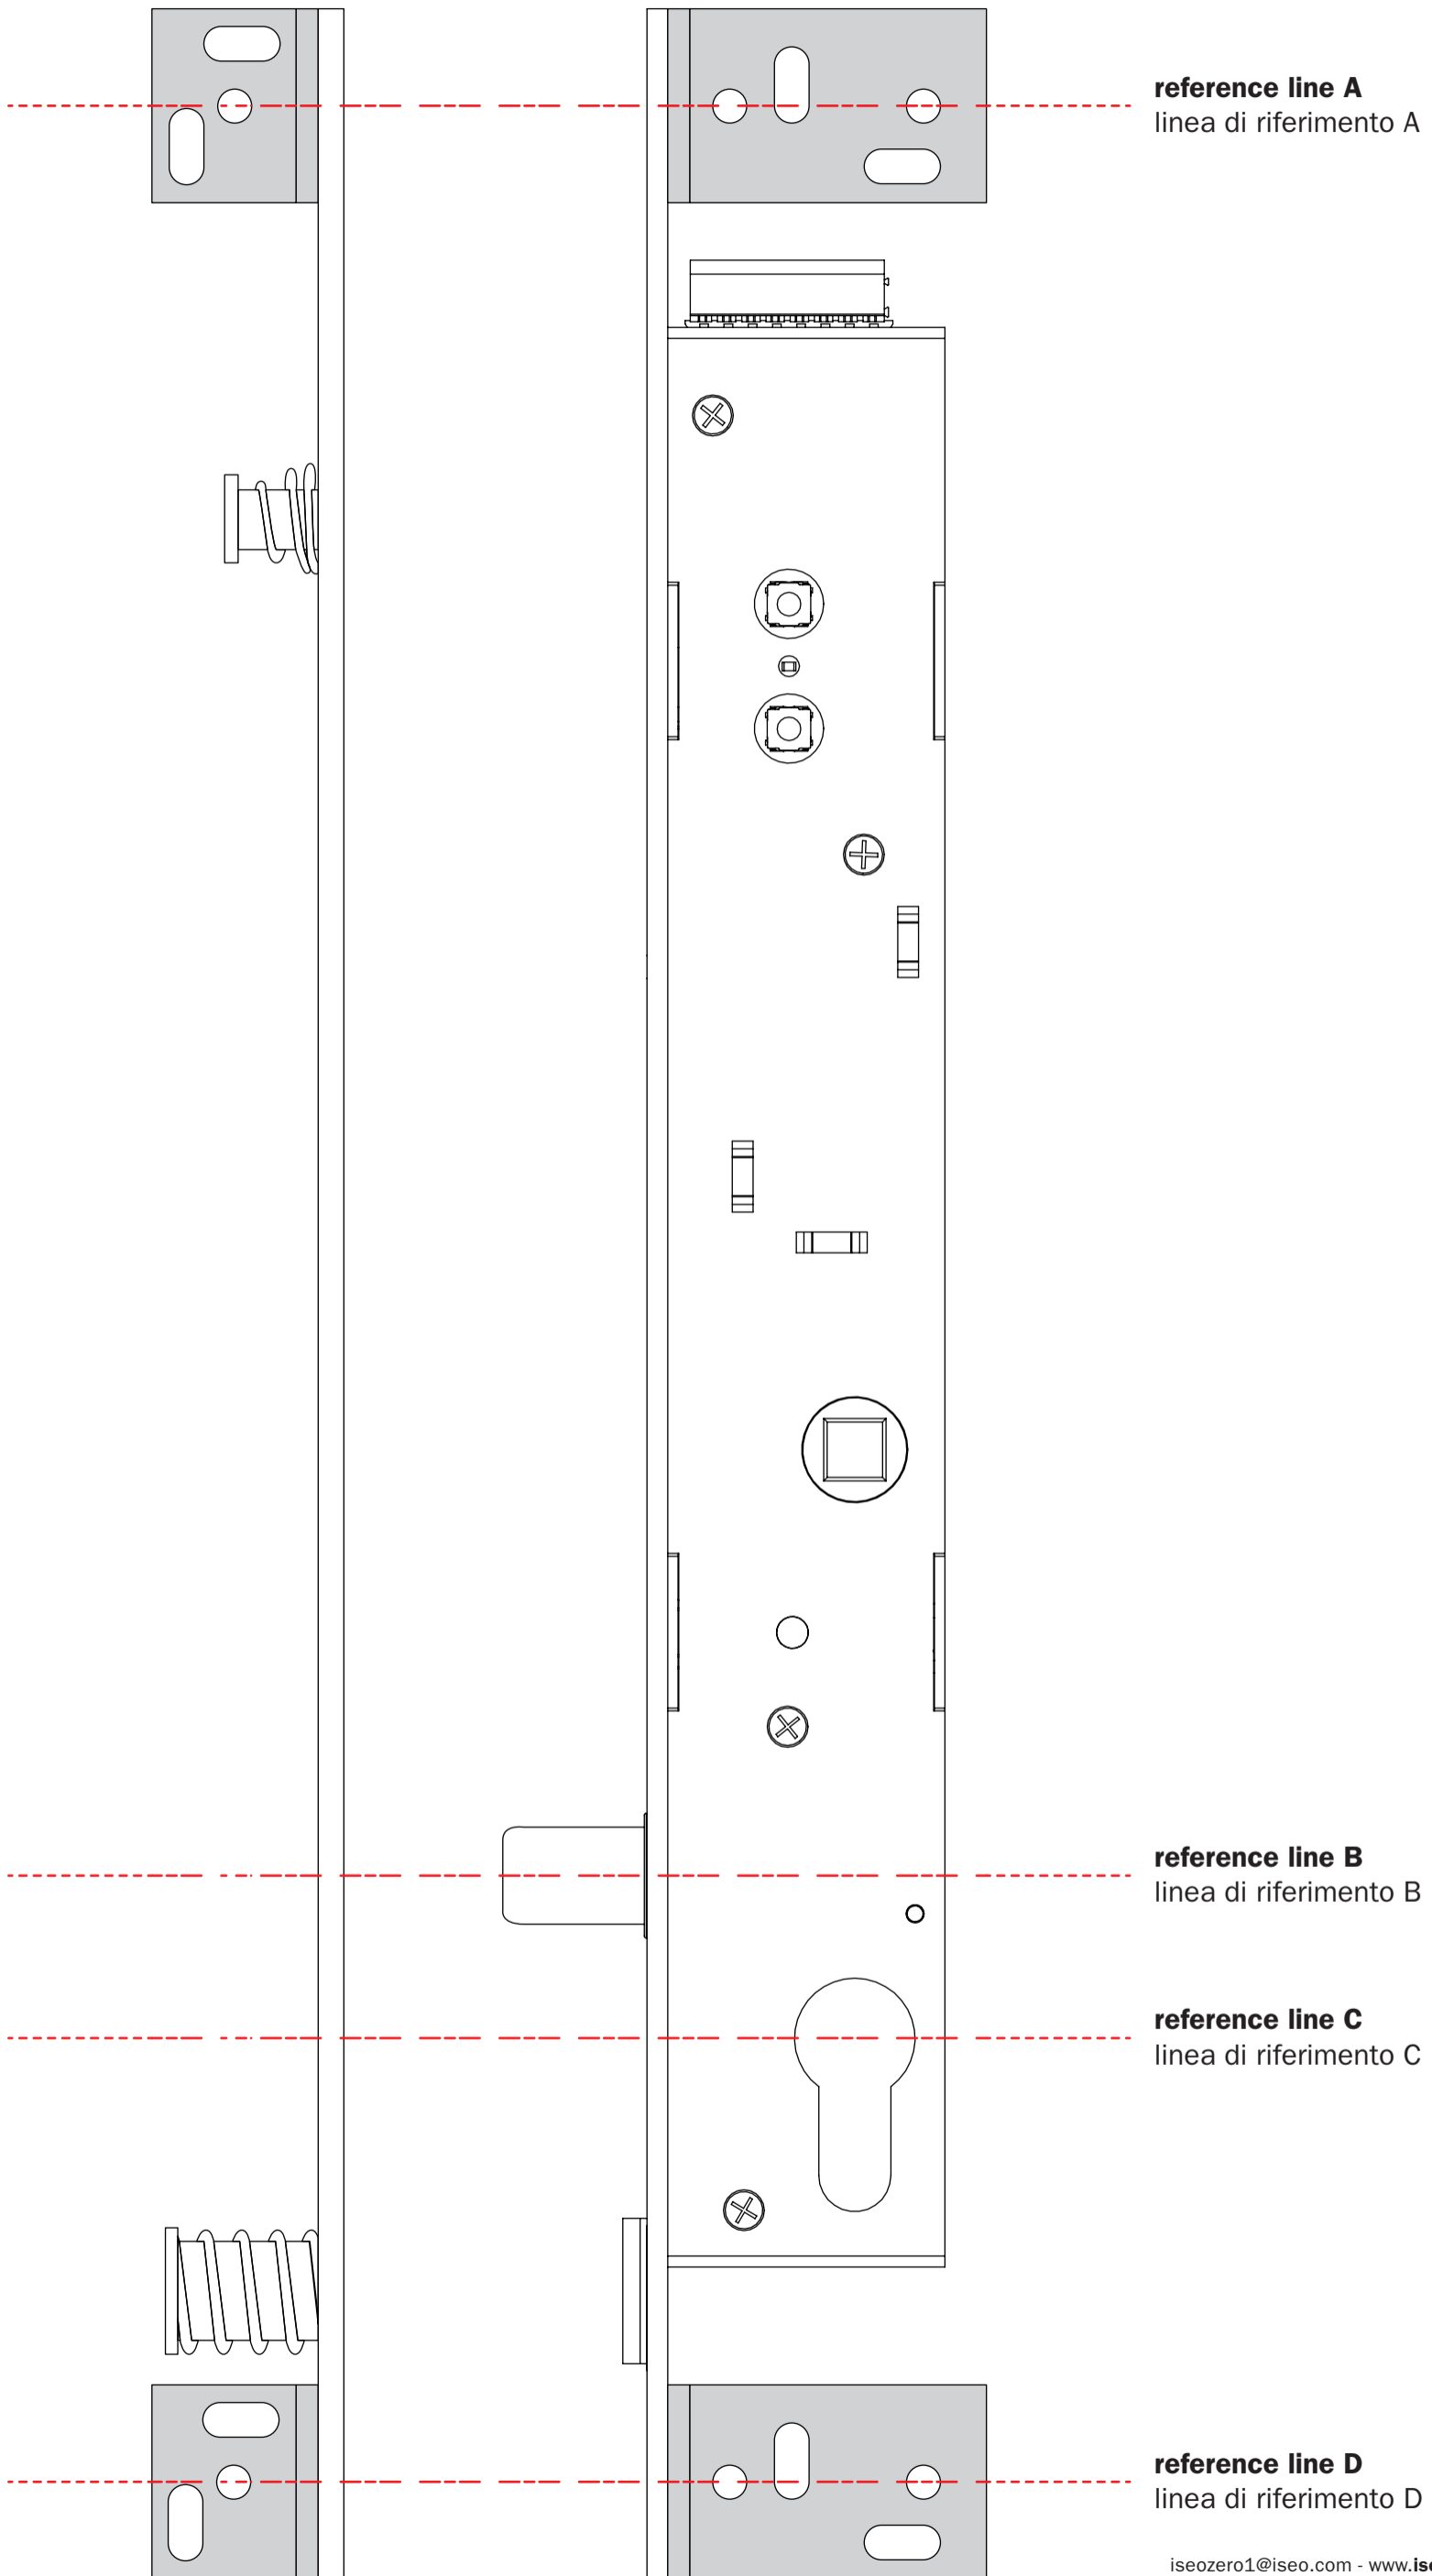



DIN RIGHT
DIN DX







reference line A
linea di riferimento A

reference line B
linea di riferimento B

reference line C
linea di riferimento C

reference line D
linea di riferimento D

DIN LEFT
DIN SX

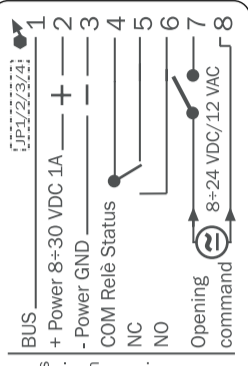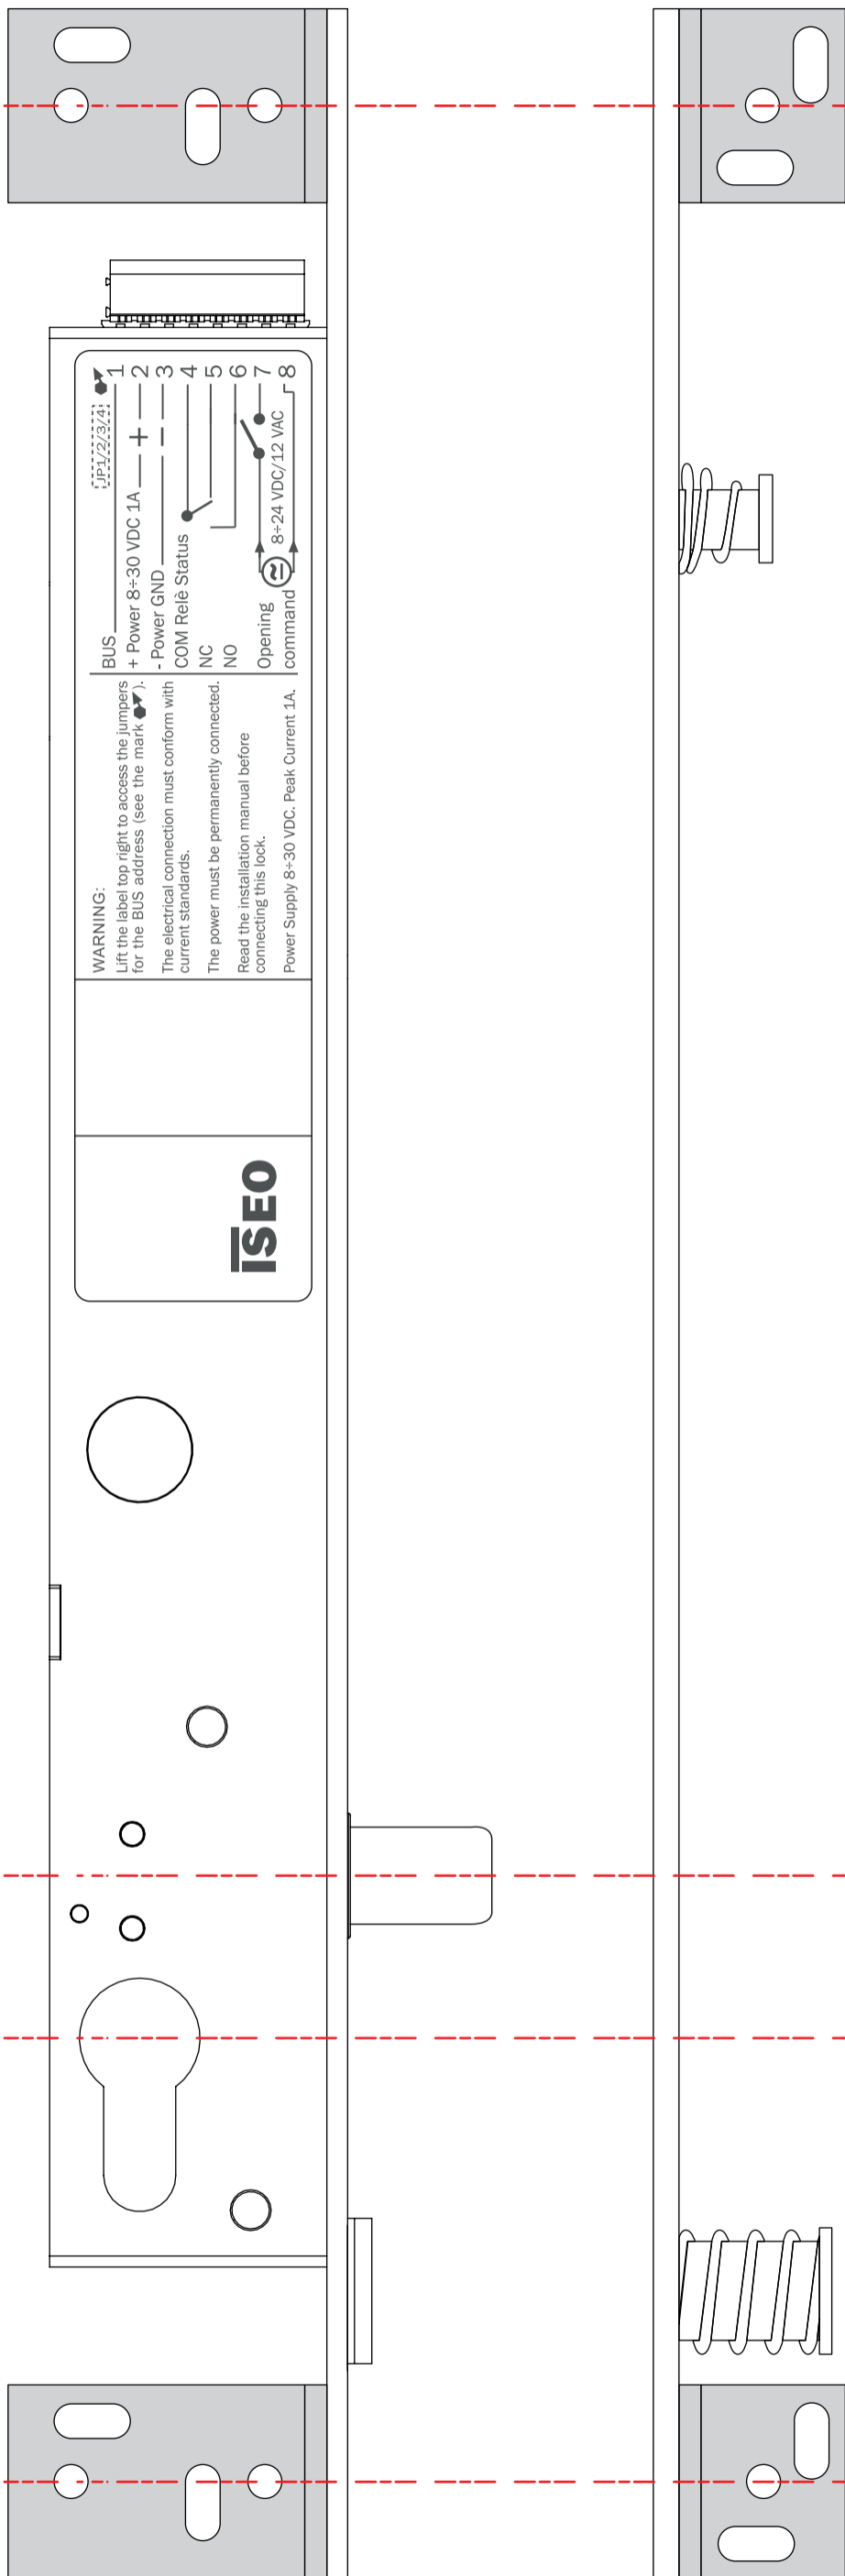

WARNING:
Lift the label top right to access the jumpers for the BUS address (see the mark ●).
The electrical connection must conform with current standards.
The power must be permanently connected.
Read the installation manual before connecting this lock.
Power Supply 8-30 VDC. Peak Current 1A.



reference line A
linea di riferimento A

reference line B
linea di riferimento B

reference line C
linea di riferimento C

reference line D
linea di riferimento D